



# Product Catalog

## Split System Air Conditioners Odyssey™

Heat Pump Condenser — 5 to 16.7 Tons — 50 Hz

Air Handler — 4.6 to 16.7 Tons — 50 Hz



July 2018

SSP-PRC024K-EN





## Introduction

Trane's reputation for providing quality comfort solutions continues with the development of the next generation Light Commercial Odyssey Split Systems.

With wide network availability, flexible applications, installation ease, built-in reliability and easy servicing, Odyssey will meet any number of customer applications. Add to that Trane's outstanding customer service and you have the formula to make Odyssey the clear choice for continued customer satisfaction.

## Wide network availability

A broad distribution network provides owners, maintenance personnel, contractors, etc., the means to get their hands on equipment when they need it. Whether it's an emergency replacement or a new construction project in its infancy stages, Odyssey products meet an array of needs at the right time and right price.

## Flexible applications

No matter what the application, Odyssey provides the solution. A broad array of models and tonnages are available with single or dual compressors, single or dual circuits and numerous accessories. Condensing units can be installed on the ground or on a rooftop along with extended piping runs, while air handlers can be free discharge on the ground or horizontally suspended with long duct runs from a ceiling. Should application challenges arise, Odyssey delivers.

## Easy to install

Small footprints and low weights combined with factory installed components like TXVs, filter driers, etc., reduce installation time and cost. Colored and numbered wiring and factory tested units make Odyssey the right choice.

## Built-in reliability

Keeping in mind that productivity only occurs when equipment is operational, Trane has taken the steps to ensure that Odyssey is up and running. Early indicators such as phase/reversal monitors and loss of charge protection provide diagnostics which prevent failure and provide years of worry-free service and operation.

## Easy to service

When preventive maintenance or service is required, technicians will find efficient access to both air handlers and condensers. Panels provide complete, easy access coupled with standardized cabinets in which all components are located in proximity. Odyssey's improved design results in minimum service times and costs.

With these capabilities, Odyssey provides customers high efficiency and superior performance for the best all-around value in the market today.

## Copyright

This document and the information in it are the property of Trane, and may not be used or reproduced in whole or in part without written permission. Trane reserves the right to revise this publication at any time, and to make changes to its content without obligation to notify any person of such revision or change.

## Trademarks

All trademarks referenced in this document are the trademarks of their respective owners.

## Revision History

- Weights, dimensional drawings have been updated to reflect that service valves are no longer a factory installed feature.
- Running edits included.



# Table of Contents

Features .....	6
Split System Overview .....	6
Standard and Optional Features .....	7
Standard and Optional Controls .....	9
Accessories .....	12
Heat Pump Condenser .....	12
Air Handler .....	13
Electric Heaters .....	14
Application Considerations .....	15
Clearance Requirements .....	15
180° Blower Rotation .....	15
Low Ambient Cooling .....	15
Selection Procedure .....	17
Cooling Capacity .....	17
Heating Capacity .....	17
Air Delivery .....	18
Model Number Description .....	19
Heat Pump Condenser .....	19
Air Handler .....	20
General Data .....	21
Performance Data .....	25
Gross Cooling Capacities .....	25
Gross Heating Capacities .....	49
Fan Performance .....	57
Controls .....	75
ReliaTel .....	75
Electromechanical .....	76
Electrical Data .....	77
Heat Pump Condenser .....	77
Air Handler (Standard) .....	77
Jobsite Connections .....	80
ReliaTel Controls .....	80

Dimensional Data.....	81
Heat Pump Condenser .....	81
Air Handler .....	86
Accessories .....	93
Weights.....	100
Heat Pump Condenser .....	100
Air Handler .....	101
Accessories .....	103
Mechanical Specifications .....	104
Condensing Units.....	104
Air Handlers.....	106



# Features

## Split System Overview

Unlike typical split systems on the market, Odyssey offers easy servicing, built-in reliability, ease of installation and outstanding customer service. And because today's owners are very cost-conscious when it comes to service and maintenance, the Odyssey Split System was designed with direct input from service contractors. This valuable information helped to design a product that would get the service person off the job quicker and save the owner money.

## Flexible Applications

Odyssey offers outstanding standard features enhanced by a variety of factory and field installed options, multiple control options, rigorously tested proven designs and superior product and technical support. Because of this, Odyssey offers ultimate flexibility. Units are built to order in our standard "shortest in the industry" ship cycle time. Odyssey is available with single, dual and manifolded compressor options. Single compressor outdoor units feature a single refrigeration circuitry, lowering job installation costs by requiring only one set of refrigerant lines.

Equally important, Odyssey offers single refrigerant circuit/capacity unloading models. The unloading units feature dual manifolded scroll compressors with two stages of capacity modulation and a single refrigeration circuit. Dual compressor/dual circuit models give true stand-by protection - if one compressor fails, the second will automatically start-up. Also, the first compressor can be serviced without shutting down the unit since the refrigerant circuits are independent. Dual compressor models also save on energy costs. During light load conditions, only one compressor will operate to save energy.

## Unmatched Product Support

One of our finest assets, Trane Sales Representatives are a support group that can assist you with:

- Product
- Application
- Service
- Training
- Special Applications
- Specifications
- Computer Programs and much more

## Rigorous Testing

Our units are rigorously rain tested to ensure water integrity. Actual shipping tests are performed to determine packaging requirements. Units are test shipped around the country to determine the best packaging. Factory shake and drop tests are used as part of the package design process to help assure that the unit arrives at the job site in top condition. Rigging tests include lifting a unit into the air and letting it drop one foot, assuring that the lifting lugs and rails hold up under stress. A 100% coil leak test is performed at the factory. The condenser coils are leak tested at 660 psig and evaporators to 450 psig. All parts are inspected at the point of final assembly. Sub-standard parts are identified and rejected immediately. Every unit receives a 100% unit run test before leaving the production line to ensure it lives up to rigorous Trane requirements.

## Standard and Optional Features

Figure 1. Compressors

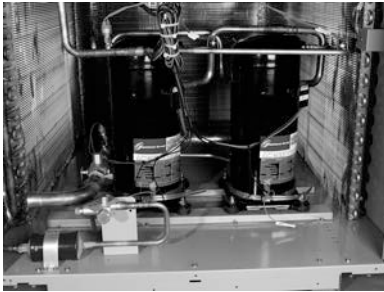


Figure 2. Belt drive motor




Figure 3. Easy access to terminal board



**Airflow Distribution** — Odyssey can replace an older machine with old ductwork and, in many cases, improve the comfort through better air distribution.

**Anti-Short Cycle Timer** — Provides a 3 minute minimum “ON” time and 3 minute “OFF” time for compressors to enhance compressor reliability by assuring proper oil return.

**Belt Drive Motors** — For additional static requirements, Odyssey Split Systems offer standard belt drive motors to meet and exceed a wide range of airflow needs.

**Black Epoxy Pre-Coated Condenser Coils** — The pre-coated coils are an economical option for protection in mildly corrosive environments.

**Colored And Numbered Wiring** — Save time and money tracing wires and diagnosing the unit.

**Compressors** — Odyssey Split Systems contain the best compressor technology available to achieve the highest possible performance. Dual compressors perform very well under part load cooling conditions and system back- up applications. Dual compressors are available on 4.6-20.9 ton models and allow for efficient cooling utilizing 2-stages of compressor operation.

**Convertible Units** — The air handlers ship in a horizontal configuration. They can be easily converted to vertical by simply repositioning the drain pan. Units come complete with duct flanges so the contractor doesn’t have to field fabricate them. These duct flanges are a time and cost saver.

**Crankcase Heaters** — These band heaters provide improved compressor reliability by warming the oil to prevent migration during off-cycles or low ambient conditions.

**Dual Sloped Drain Pans**— Every Odyssey unit has a non-corrosive, removable, double sloped drain pan that’s easy to clean and reversible to allow installation of drain trap in two positions on either side of the unit.

**Easy Access Low Voltage Terminal Board** — Odyssey’s Low Voltage Terminal Board is external to the line voltage electrical cabinet. It is extremely easy to locate and attach the thermostat wire and test operation of all unit functions. This is another cost and time saving installation feature.

**Electric Heaters** — Electric heat modules are available in a variety of voltages and capacities.

**Foil Faced Insulation** — All internal air handler surfaces have cleanable foil-faced insulation. All edges are either captured or sealed to ensure insulation fibers do not get into the airstream.

**Hail/Vandal Guards** — These coil guards shall be either factory or field installed for condenser coil protection. This feature protects the condenser coil from vandalism and/or hail damage. When ordered factory installed, it also adds additional shipping protection.

**High/Low Static Motor** — Available on many models, this high static motor accessory extends the capability of the standard unit.

**High Pressure Control** — All units include High Pressure Control as standard.

**Low Ambient** — Provides ability to cool space when outdoor ambient is below 50°F. Choice of fan on/off or modulating control.



## Features

**Low Ambient Cooling** — All Odyssey microprocessor units have cooling capabilities down to 0° F as standard.

**Low Voltage Connections** — The wiring of the low voltage connections to the unit and the zone sensors is as simple as 1-1, 2-2, and 3-3. This simplified system makes it easy for the installer to wire.

**Phase Monitor/Reversal Protection** — Phase monitor shall provide 100% protection for motors and compressors against problems caused by phase loss, phase imbalance, and phase reversal. Phase monitors are equipped with an LED that provides an ON or FAULT indicator.

**Quick-Access Panels** — Remove a few screws for access to the standardized internal components and wiring.

**Single Point Power** — A single electrical connection powers the unit.

**Single Side Service** — Single side service is standard on all units.

**Standardized Components** — Components are placed in the same location on all Odyssey units. Because of these standardized components throughout the Odyssey line, contractors/owners can stock fewer parts.

**Thermal Expansion Valve with Bypass Check Valves** — This feature is standard on all indoor units.

**Unit Cabinet** — The compact cabinet takes up less room and is less costly to ship. It's cabinet design also ensures water integrity.

**Table 1. Odyssey features – standard and optional**

	Standard Features	Options <sup>(a)</sup>	
		Factory Installed	Field Installed
1-year Limited Parts Warranty	X		
5-year Limited Compressor Warranty	X		
Anti-Short Cycle Timer	X		
Belt Drive Motors	X		
Black Epoxy Pre-Coated Coils		X	
Colored and Numbered Wiring	X		
Compressor Discharge Temperature Limit (DTL)	X		
Convertible Airflow	X		
Crankcase Heaters	X		
Easy Access Low Voltage Terminal Board (LTB)	X		
Electric Heaters			X
Filters	X		
Foil-Faced and Edge Captured Insulation	X		
Hail/Vandal Guards		X	X
High Pressure Control	X		
High Static Motor Kit <sup>(b)</sup>			X
IAQ Dual Sloped and Removable Drain Pans	X		
Liquid Line Refrigerant Drier	X		
Low Ambient Cooling			X
Low Ambient Cooling to 50°F on Electromechanical Models	X		
Low Pressure Control	X		
Low Static Motor Kit <sup>(b)</sup>			X
Low Voltage Circuit Protection	X		
Phase Loss/Reversal Monitor	X		
Quick Access Panels	X		
Scroll Compressors	X		
Single Point Power	X		




**Table 1. Odyssey features – standard and optional (continued)**

	Standard Features	Options <sup>(a)</sup>	
		Factory Installed	Field Installed
Single Side Service	X		
Standardized Components	X		
Thermal Expansion Valve	X		
Vibration Isolators			X

(a) Refer to model number description for option availability or contact Product Support.  
 (b) Available on standard units only. See Accessories chapter for more information.

## Standard and Optional Controls

### ReliaTel™ Controls

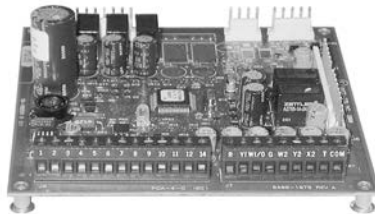**Figure 4. ReliaTel board**


ReliaTel controls provide unit control for heating, cooling, and ventilating, utilizing input from sensors that measure outdoor and indoor temperature. ReliaTel also provides outputs for building automation systems and expanded diagnostics. Quality and reliability are enhanced through ReliaTel control and logic:

- Prevents the unit from short cycling, considerably improving compressor life.
- Ensures the compressor will run for a specific amount of time which allows oil to return for better lubrication, enhancing the reliability of the compressor.
- Reduces the number of components required to operate the unit, reducing possibilities for component failure.

#### ReliaTel Makes Installing and Servicing Easy

ReliaTel eliminates the need for field-installed, anti-short cycle timer and time delay relays. The wiring of the low voltage connections to the unit and the zone sensors is as easy as 1-1, 2-2, and 3-3. This simplified system makes wiring easier for the installer.

#### ReliaTel Makes Testing Easy

ReliaTel requires no special tools to run the unit through its paces. Simply place a jumper between Test 1 and Test 2 terminals on the Low Voltage Terminal Board and the unit will walk through its operational steps automatically. The unit automatically returns control to the zone sensor after stepping through the test mode a single time, even if the jumper is left on the unit. As long as the unit has power and the “system on” LED is lit, ReliaTel is operational. The light indicates that the controls are functioning properly. ReliaTel features expanded diagnostic capabilities when utilized with Trane Integrated Comfort™ Systems. Some zone sensor options have central control panel lights which indicate the mode the unit is in and possible diagnostic information (dirty filters for example).

#### ReliaTel Has Other Benefits

- The ReliaTel built-in anti-shortcycle timer, time delay relay and minimum “on” time control functions are factory tested to assure proper operation.
- ReliaTel softens electrical “spikes” by staging on fans, compressors and heaters.



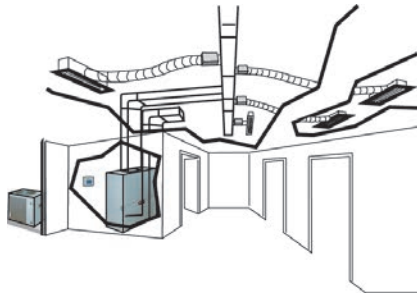
## Features

---

- Intelligent Fallback is a benefit to the building occupant. If a component goes astray, the unit will continue to operate at predetermined temperature setpoint.
- Intelligent Anticipation is a standard feature. It functions continuously as ReliaTel and zone sensor(s) work together in harmony to provide much tighter comfort control than conventional electromechanical thermostats.
- The ReliaTel design is standardized across the board, ensuring a lower cost to owners.

## Additional Controls

**VariTrac® Building Automation System** — When Trane's changeover VAV System for light commercial applications is coupled with the unit, it provides the latest in technological advances for comfort management systems and can allow thermostat control in every zone served by VariTrac.



**Trane Communication Interface (TCI)** — This module, when applied with ReliaTel, easily interfaces with the Trane Integrated Comfort System™.

**Frostat™** — This control utilizes a capillary bulb embedded in the face of the evaporator coil which monitors coil temperature to inhibit evaporator icing and protect the compressor. Recommended for applications with low leaving air temperatures, low airflow and/or high latent load applications.

**LonTalk® Communications Interface** — The LonTalk communications interface allows the unit to communicate as a Tracer™ LCI-V device or directly with generic LonTalk Network Building Automation System Controls.

**BACnet® Communication Interface (BCI)** — The BACnet Communication Interface allows the unit to communicate directly with a generic open protocol BACnet MS/TP Network Building Automation Control System.

**Zone Sensors/Thermostats** — Available in wireless, programmable, automatic and manual styles.

**Table 2. Odyssey control options – standard and optional**

	Standard Features	Options <sup>(a)</sup>	
		Factory Installed	Field Installed
BACnet Communication Interface (BCI)			X
Froststat - Evaporator Defrost Control (EDC)	X		
LonTalk Communications Interface (LCI)		X	X
ReliaTel Microprocessor Controls	X	X	
Thermostat			X
Trane Communications Interface (TCI)			X
Wireless Zone Sensor			X
Zone Sensor			X

<sup>(a)</sup> Refer to model number description for option availability or contact Product Support.



# Accessories

## Heat Pump Condenser

**Table 3. TWA Accessories**

Model	Used With
<b>Coil (Hail/Vandal) Guard</b>	
BAYGARD058*	TWA0604*A, TWA0764*A
BAYGARD059*	TWA060**D, TWA076**D
BAYGARD060*	TWA101
BAYGARD061*	TWA156, TWA201
<b>Rubber Isolators</b>	
BAYISLT005* (black)	TWA060, TWA076, TWA101
BAYISLT009* (red)	TWA156
BAYISLT010* (green)	TWA201
<b>Steel Spring Isolators</b>	
BAYISLT023* (red)	TWA060, TWA076, TWA101
BAYISLT024* (black)	TWA156
BAYISLT025* (yellow)	TWA201
<b>Service Valve Kit</b>	
BAYVALV001A	TWA0604*A, TWA1014*A
BAYVALV002A	TWA0764*A
BAYVALV003A	TWA0604*D, TWA0764*D, TWA1014*D
BAYVALV006A	TWA1564*D, TWA2014*D
<b>Low Ambient – On/Off Fan Control (External mount, small cabinets)<sup>(a) (b) (c)</sup></b>	
BAYLOAMU01* (External Mount, small cabinets) <sup>(d)</sup>	TWA060**A, TWA076**A
BAYLOAMU02* (Internal mount, large cabinets)	TWA101, TWA156, TWA201
<b>Head Pressure Control<sup>(b)</sup></b>	
BAYLOAM435*, 50Hz	TWA060*DA/D, TWA076*DA/D
BAYLOAM436*, 50Hz	TWA101*DA/D, TWA156*DD, TWA201*DD
<b>Transducer Kit for Head Pressure Control (BAYLOAM435, 436, 437)</b>	
BAYLOTR001* <sup>(e)</sup>	TWA060**D, TWA076**D, TWA101**D
<b>Trane Communication (3/4 Communications Interface)<sup>(f)</sup></b>	
BAYICSI003*	All Models
<b>LonTalk Communications Interface<sup>(f)</sup></b>	
BAYLTCI002*	All Models

<sup>(a)</sup> Cycles fan on/off (no modulating).

<sup>(b)</sup> Quantity of 1 required for each fan (2 total for 13 ton and larger).

<sup>(c)</sup> ReliaTel™ requires onboard EDC function to be disabled when BAYLOAM is used, remove OA sensor from terminal J8-1&2

<sup>(d)</sup> Kit mounts external to the outdoor unit and operates by sensing ambient and liquid line temperatures.

<sup>(e)</sup> BAYLOTR001 required when modulating BAYLOAM kits used with units that have 2 compressors (dual circuit) and 1 condenser fan.

<sup>(f)</sup> BAYWRKT003 must also be installed when using BAYICSI003 or the BAYLTCI002 on the 13–16.7T Split System Heat Pump units

# Air Handler

**Table 4. TWE Accessories**

Model	Used With
<b>Base (Subbase)</b>	
BAYBASE009*	TWE051
BAYBASE0010*	TWE072, TWE076
BAYBASE0011*	TWE101
BAYBASE0012*	TWE126, TWE156
BAYBASE0013*	TWE201, TWE251
<b>Drip Kit</b>	
BAYDRKT006*	TWE051
BAYDRKT007*	TWE072, TWE076
BAYDRKT008*	TWE101
BAYDRKT009*	TWE126, TWE156
BAYDRKT010*	TWE201, TWE251
<b>High Static Motor Kits<sup>(a)</sup></b>	
BAYHSMT105* – 1.0HP (50Hz) with Motor Sheave, Fan Sheave and Belt	TWE051*DA
BAYHSMT108* – 1.5HP (50Hz) with Motor Sheave, Fan Sheave and Belt	TWE072*DB, TWE076*DA/B
BAYHSMT110* – 2.0HP (50Hz) with Motor Sheave, Fan Sheave and Belt	TWE072*DB, TWE076*DA/B
BAYHSMT112* – 2.0HP (50Hz) with Motor Sheave, Fan Sheave and Belt	TWE101*DA/B
BAYHSMT114* – 2.0HP (50Hz) with Motor Sheave, Fan Sheave and Belt	TWE126*DB
BAYHSMT117* – 3.0HP (50Hz) with Motor Sheave, Fan Sheave and Belt	TWE126*DB
BAYHSMT120* – 3.0HP (50Hz) with Motor Sheave and Fan Sheave (Stock Belt used)	TWE156*DB
BAYHSMT122* – 5.0 HP (50Hz) with Motor Sheave, Fan Sheave and Belt	TWE201*DB
<b>Rubber Isolators<sup>(b) (c) (d)</sup></b>	
BAYISLT004* (Floor – Blue)	TWE051, TWE072, TWE076, TWE101
BAYISLT009* (Floor – Red) <sup>(e)</sup>	TWE126, TWE156
BAYISLT010* (Floor – Green) <sup>(e)(b)</sup>	TWE201, TWE251
BAYISLT012* (Suspended – Red/Green)	TWE126, TWE156
BAYISLT013* (Suspended – Red/Green) <sup>(d)</sup>	TWE051
BAYISLT014* (Suspended – Green) <sup>(d)</sup>	TWE072, TWE076
BAYISLT015* (Suspended – Green/Black) <sup>(d)</sup>	TWE101
BAYISLT016* (Suspended – Red/Green)	TWE201
<b>Steel Spring Isolators<sup>(c)</sup></b>	
BAYISLT019* (Floor – Red) <sup>(e)(b)</sup>	TWE051, TWE072, TWE076, TWE101
BAYISLT021* (Floor – Black) <sup>(e)(b)</sup>	TWE126, TWE156
BAYISLT032* (Floor – Black/Yellow) <sup>(e)(b)</sup>	TWE201, TWE251
BAYISLT028* (Suspended – Tan)	TWE051
BAYISLT029* (Suspended – Red)	TWE072, TWE076, TWE101
BAYISLT030* (Suspended – Black)	TWE126, TWE156
BAYISLT031* (Suspended – Black/Yellow)	TWE201, TWE251
<b>Low Static Drive Kit<sup>(a)</sup></b>	
BAYLSMT001*	TWE201
<b>Plenum<sup>(f)</sup></b>	
BAYPLNM015* (Discharge Plenum & Grille) <sup>(f)</sup>	TWE051
BAYPLNM016* (Discharge Plenum & Grille) <sup>(f)</sup>	TWE072, TWE076
BAYPLNM017* (Discharge Plenum & Grille) <sup>(f)</sup>	TWE101
BAYPLNM018* (Discharge Plenum/Hydronic Coil Plenum & Grille) <sup>(f)</sup>	TWE126, TWE156
BAYPLNM019* (Discharge Plenum/Hydronic Coil Plenum & Grille) <sup>(f)</sup>	TWE201, TWE251
BAYPLNM020* (Hydronic Coil Discharge Plenum & Grille) <sup>(f)</sup>	TWE051



## Accessories

**Table 4. TWE Accessories (continued)**

Model	Used With
BAYPLNM021* (Hydronic Coil Discharge Plenum & Grille) <sup>(f)</sup>	TWE072, TWE076
BAYPLNM022* (Hydronic Coil Discharge Plenum & Grille) <sup>(f)</sup>	TWE101
BAYPLNM030* (Electric Heat Discharge Plenum & Grille) <sup>(f)</sup>	TWE051
BAYPLNM031* (Electric Heat Discharge Plenum & Grille) <sup>(f)</sup>	TWE072, TWE076
BAYPLNM032* (Electric Heat Discharge Plenum & Grille) <sup>(f)</sup>	TWE101
BAYPLNM033* (Electric Heat Discharge Plenum & Grille) <sup>(f)</sup>	TWE126, TWE156
BAYPLNM034* (Electric Heat Discharge Plenum & Grille) <sup>(f)</sup>	TWE201, TWE251
<b>Return Air Grille</b>	
BAYGRLE001*	TWE051
BAYGRLE002*	TWE072, TWE076
BAYGRLE003*	TWE101
BAYGRLE004*	TWE126, TWE156
BAYGRLE005*	TWE201, TWE251
<b>Transformer</b>	
BAYTFMR013* -75VA transformer (380*415V/50hz)	TWE076, TWE101, TWE072
<b>Water Kits</b>	
BAYWATR022* (Steam Coil Enclosure) <sup>(f)</sup>	TWE051
BAYWATR023* (Steam Coil Enclosure) <sup>(f)</sup>	TWE072, TWE076
BAYWATR024* (Steam Coil Enclosure) <sup>(f)</sup>	TWE101
BAYWATR025* (Steam Coil Enclosure) <sup>(f)</sup>	TWE126, TWE156
BAYWATR026* (Steam Coil Enclosure) <sup>(f)</sup>	TWE201, TWE251
BAYWATR027* (Hot Water Coil Enclosure) <sup>(f)</sup>	TWE051
BAYWATR028* (Hot Water Coil Enclosure) <sup>(f)</sup>	TWE072, TWE076
BAYWATR029* (Hot Water Coil Enclosure) <sup>(f)</sup>	TWE101
BAYWATR030* (Hot Water Coil Enclosure) <sup>(f)</sup>	TWE126, TWE156
BAYWATR031* (Hot Water Coil Enclosure) <sup>(f)</sup>	TWE201, TWE251
<b>Wire Kit — 180° Blower Discharge Reversal Kit<sup>(g)</sup></b>	
BAYWRKT002*	TWE051, TWE072, TWE076, TWE101

(a) Used on standard air handlers only.

(b) Requires use of subbase accessory.

(c) In units with steam or hot water coils applied vertically or horizontally, check IOM for proper Isolator Kit selection.

(d) Do not use if blower will operate less than 600 RPM.

(e) When the air handler is in the vertical position and close proximity trapping of condensate is required, use of subbase is required.

(f) When installed horizontally, plenum/water coil must be self-supported.

(g) Cannot be used on TWE126–201, due to motor mount location.

## Electric Heaters

**Table 5. Electric heaters**

Model	Used With
<b>4.6–8.33 Ton Electric Heater Selection</b>	
BAYHTRL405* — 3.13/3.74 kW Heater 380/415 / 3 Phase	TWE051, TWE072*D, TWE076, TWE101
BAYHTRL410* — 6.25/7.46 kW Heater 380/415 / 3 Phase	TWE051, TWE072*D, TWE076, TWE101
BAYHTRL415* — 9.37/11.17 kW Heater 380/415 / 3 Phase	TWE051, TWE072*D, TWE076, TWE101
BAYHTRL425* — 15.63/18.64 kW Heater 380/415 / 3 Phase	TWE051, TWE072*D, TWE076, TWE101
BAYHTRL435* — 21.86/26.08 kW Heater 380/415 / 3 Phase	TWE072*D, TWE076, TWE101
<b>10.4–16.7 Ton Electric Heater Selection</b>	
BAYHTRM410* — 6.25/7.46 kW Heater 380/415 / 3 Phase	TWE126, TWE156, TWE201
BAYHTRM420* — 12.50/14.92 kW Heater 380/415 / 3 Phase	TWE126, TWE156, TWE201
BAYHTRM430* — 18.76/22.38 kW Heater 380/415 / 3 Phase	TWE126, TWE156, TWE201
BAYHTRM450* — 31.26/37.29 kW Heater 380/415 / 3 Phase	TWE126, TWE156, TWE201



# Application Considerations

Application of this product should be within the cataloged airflow and performance considerations.

## Clearance Requirements

The recommended clearances identified with unit dimensions should be maintained to assure adequate serviceability, maximum capacity and peak operating efficiency. Actual clearances which appear inadequate should be reviewed with the local representative.


## 180° Blower Rotation

The 4.6, 6.25, and 8.33 ton standard air handler blower section can be rotated 180° to change the discharge pattern. This modification must be done in the field and requires an additional kit. See unit installation guide.


## Low Ambient Cooling

As manufactured, electromechanical units can operate to 50°F in the cooling mode of operation. An accessory head pressure control will allow operation to 0°F outdoor ambient. When using these units with control systems such as bypass changeover Variable Air Volume, make sure to consider the requirement for a head pressure control to allow low ambient cooling.


**Figure 5. Typical split system application**

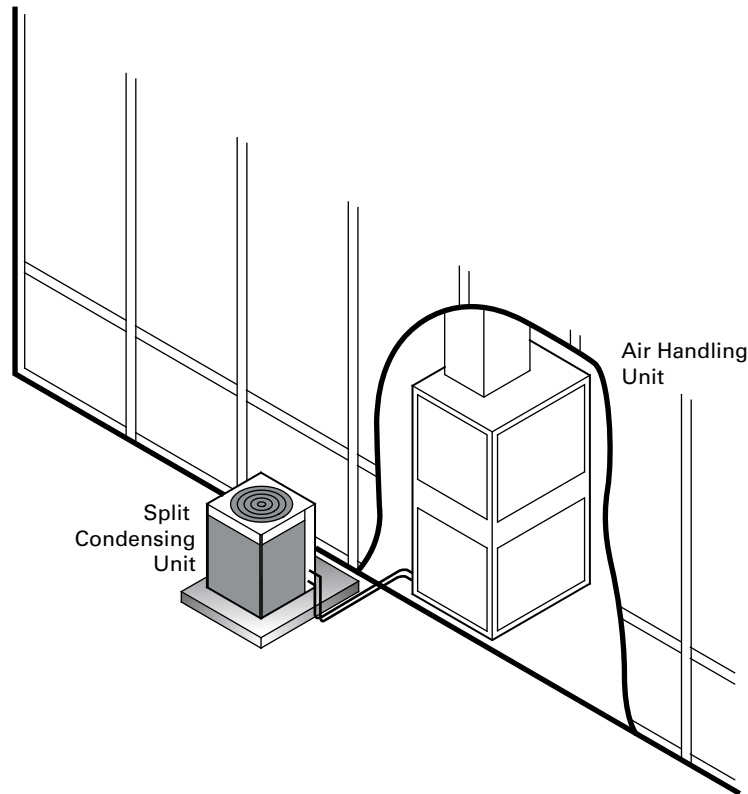

**Figure 6. Typical horizontal air handler application**

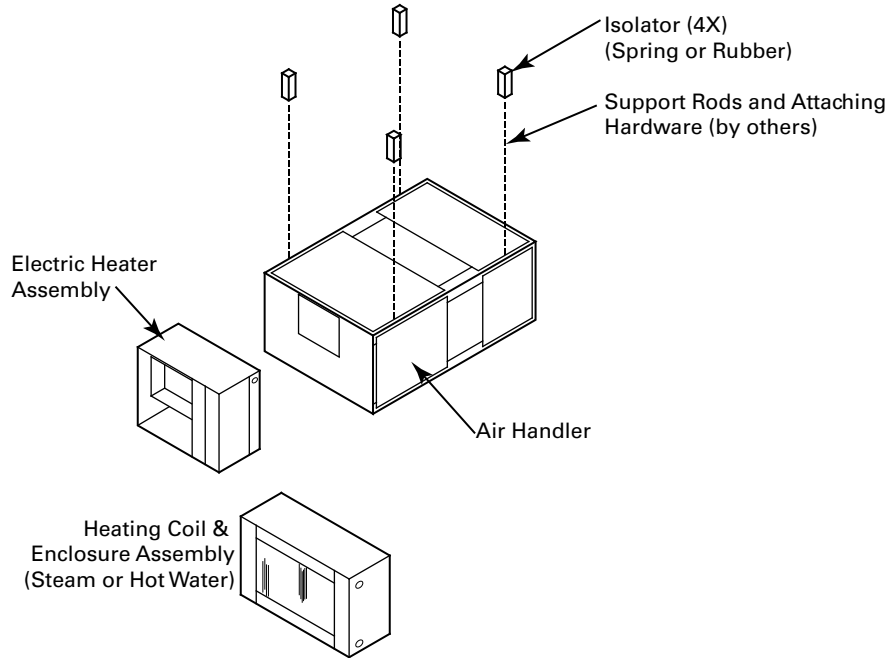

**Figure 7. Typical vertical air handler application**

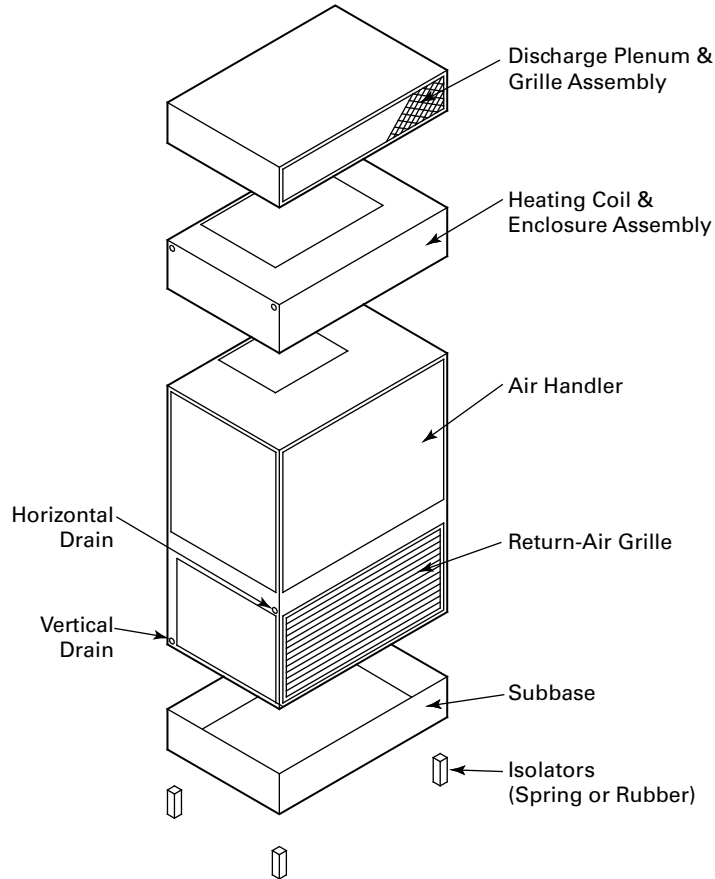





# Selection Procedure

## Cooling Capacity

1. Calculate the building's total and sensible cooling loads at design conditions, using standardized calculation methods.
2. Size the equipment using the gross cooling capacity tables. Match the cooling loads at design conditions. For example, if the following specifies the building cooling requirements:  
Electrical Characteristics: 415/50/3  
Summer Design Conditions: Entering Evap Coil—80°F DB/67°F WB (27°C DB/19°C WB),  
Outdoor Ambient—95°F (35°C)  
Total Cooling Load: 75 MBh (22 kW)  
Sensible Cooling Load: 56 MBh (16.4 kW)  
Airflow: 2500 cfm (4248 m<sup>3</sup>/h)  
External Static Pressure: .74 inches of water gauge
3. Use to determine that TWA076\*\*A with TWE076\*\*A has a gross cooling capacity of 77.2 MBh (22.6 kW) and 62.8 MBh (18.4 kW) sensible capacity at 95°F DB (35°C) ambient and 2500 cfm (4248 m<sup>3</sup>/h) with 80°F DB/67° F WB (27°C DB/19°C WB) air entering the evaporator.
4. To find the net cooling capacities, fan motor heat must be subtracted. Determine the total unit static pressure:  
External Static Duct System: 0.74 (191.8 Pa)  
Standard Filter: 0.10 in. (25 Pa)  
Supplementary Electric Heat: .16 in. (40.6 Pa)  
Total Static Pressure: 1 in. (249.09 Pa)

### Notes:

- *The Evaporator Fan Performance Table has included the effect of a 1 in. (249 Pa) filter already. Therefore, the actual Total Static Pressure is 1 - 0.1 = .9 in. (233.2 Pa). With 2500 cfm (4248 m<sup>3</sup>/h) and .93 in. (231.6 Pa) , Table 62, p. 60 shows 1.51 Bhp (ultra high static drive kit required).*
- *This formula can be used to calculate Fan Motor Heat:*  
$$3.15 \times \text{Bhp} = \text{MBh}$$
$$3.15 \times 1.51 = 4.75 \text{ MBh}$$
$$\text{Net Total Cooling Capacity} = 77.2 \text{ MBh} - 4.75 \text{ MBh} = 72.45 \text{ MBh} (21.2 \text{ kW})$$
$$\text{Net Sensible Cooling Capacity} = 62.8 \text{ MBh} - 4.75 \text{ MBh} = 58.05 \text{ MBh} (17.0 \text{ kW})$$

## Heating Capacity

1. Calculate the building heating load using the Trane calculation form or any other standard accepted method.
2. Size the equipment using [Table 77, p. 74](#) to match the heating loads at design conditions. For example, if the following specifies the building heating requirements:  
Total Heating Load: 90.0 MBh (26.34 kW)  
Outdoor Ambient (Winter): 17°F DB (-8.3°C)  
Indoor Return Temperature: 70°F DB (21.1°C)  
Airflow: 2500 cfm (4248 m<sup>3</sup>/h)
3. [Table 46, p. 51](#) indicates the mechanical heating portion of the heat pump will provide 40.4 MBh for the winter design conditions. Full heat load must be carried by the supplementary heater in the unlikely event the heat pump malfunctions. From [Table 78, p. 74](#), the 34.88 kW heater at 460V has a capacity of 119,045. From , the 34.88 kW heater at 460V indicates the heater model is BAYHTRL435.



## Selection Procedure

---

### Air Delivery

1. The external static pressure drop through the air distribution system is .74 inches of water gauge, use [Table 77, p. 74](#) to determine that the static pressure drop through the electric heater is 0.16 inches of water (.74 + .16 = .9 in.).
2. Enter [Table 62, p. 60](#) for TWE0764DA at 2500 cfm (4248 m<sup>3</sup>/h) and 1.00 (249 Pa) static pressure. The high static motor at 987 RPM gives the desired airflow.



# Model Number Description

## Heat Pump Condenser

### Digit 1-3 – Unit Function

**TWA** = Split System Heat Pump

### Digit 4-6 – Tonnage

**060** = 5 Tons (50Hz)  
**076** = 6.25 Tons (50Hz)  
**101** = 8.33 Tons (50Hz)  
**156** = 13.0 Tons (50Hz)  
**201** = 16.7 Tons (50Hz)

### Digit 7 – Refrigerant

**4** = R-410A

### Digit 8 – Voltage

**D** = 380-415VAC - 3 PH (50Hz)

### Digit 9 – Refrigeration Circuit/Stage

**A** = 1 Compressor/1 Line/1 Stage (Single)  
**D** = 2 Compressors/2 Line/2 Stage (Duals)

### Digit 10 – Major Design Sequence

**A** = Rev A

### Digit 11 – Minor Design Sequence

**B** = Rev B

### Digit 12-13 – Service Digits

**00** = 00

### Digit 14 – Efficiency Generation

**A** = Generation A

### Digit 15 – Controls

**R** = ReliaTel™

### Digit 16 – None

**0** = None

### Digit 17 – Coil Protection

**0** = Standard Coil  
**1** = Standard Coil w/ Hail Guard  
**2** = Black Epoxy Pre-Coated Condenser Coil (FIN/TUBE)  
**3** = Black Epoxy Pre-Coated Condenser Coil with Hail Guard (FIN/TUBE)

### Digit 18-20 – None

**0** = None

### Digit 21 – Communications Options

**0** = No Option  
**2** = LonTalk® Communications Interface (LCI)

### Digit 22-40 – None

**0** = None



## Model Number Description

---

### Air Handler

**Digit 1–3 – Unit Function**

**TWE** = Air Handler

**Digit 4–6 – Tonnage**

**051** = 4.6 Tons (50Hz)  
**072** = 6 Tons (50Hz)  
**076** = 6.25 Tons (50Hz)  
**101** = 8.33 Tons (50Hz)  
**126** = 10.4 Tons (50Hz)  
**156** = 13.0 Tons (50Hz)  
**201** = 16.7 Tons (50Hz)  
**251** = 20.9 Tons (50Hz)

**Digit 7 – Refrigerant**

**4** = R-410A

**Digit 8 – Voltage**

**D** = 380–415VAC - 3 PH (50Hz)

**Digit 9 – Refrigeration Circuit/Stage**

**A** = Single Circuit  
**B** = Dual Circuit

**Digit 10 – Major Design Sequence**

**A** = Rev A

**Digit 11 – Minor Design Sequence**

**A** = Rev A

**Digit 12–13 – Service Digits**

**00** = 00

**Digit 14 – Efficiency Generation**

**A** = Generation A (2018 DOE)

**Digit 15 – Controls**

**0** = Constant Volume  
**A** = 2 Stage Airflow (Electromechanical Cond Only)  
**B** = Single Zone VAV (ReliaTel Cond Only)

**Digit 16 – Indoor Fan Sizes**

**0** = Standard Motor  
**4** = High Static – (Oversized Motor for VFD Units)

**Digit 17–40 – None**

**0** = None



# General Data

**Table 6. General data for 5 - 6.25 ton (TWA0604DA\* - TWA0764DD\*) heat pump, 50 Hz**

	<b>5 Tons Single Compressor TWA0604DA*</b>	<b>5 Tons Dual Compressor TWA0604DD*</b>	<b>6.25 Tons Single Compressor TWA0764DA*</b>	<b>6.25 Tons Dual Compressor TWA0764DD*</b>
<b>Cooling Performance - Gross Cooling Capacity</b>				
Matched Air Handler	TWE0764DA*	TWE0724DB*	TWE0764DA*	TWE0764DB*
AHRI Rated Airflow - (m <sup>3</sup> /hr)	2,000 (3398)	2,000 (3398)	2,500 (4248)	2,500 (4248)
Matched Air Handler - Btu (kW)	69,000 (20.2)	65,000 (19.0)	75,000 (22)	80,000 (23.4)
Condensing Unit Only - Btu (kW)	63,500 (18.6)	57,500 (16.9)	70,000 (20.5)	72,000 (21.1)
AHRI Net Cooling Capacity - Btu (kW)	68,000 (19.9)	64,500 (18.9)	74,000 (21.7)	79,000 (23.2)
<b>Efficiency</b>				
Matched Air Handler/Condensing Unit Only	11.8 / 13.2	11.8 / 12.9	11.8 / 12.7	11.8 / 13.1
System Power/Condensing Unit Power (kW)	5.3 / 4.8	4.9 / 4.5	6.2 / 5.5	6.1 / 5.5
<b>Heating Performance - AHRI Htg/Matched AH</b>				
High Temperature Capacity	62,000 (18.2)	52,000 (15.2)	66,000 (19.3)	65,000 (19)
System kW/COP	4.7 / 3.4	4 / 3.4	4.9 / 3.4	4.9 / 3.4
Low Temperature Capacity	38,500 (11.3)	29,800 (8.7)	41,000 (12)	38,000 (11.1)
System kW/COP	4.2 / 2.3	3.7 / 2.3	4.5 / 2.3	4.5 / 2.3
<b>Compressor</b>				
Type	Scroll	Scroll	Scroll	Scroll
No.	1	2	1	2
<b>System Data</b>				
No. Refrigerant Circuits <sup>(a)</sup>	1	2	1	2
Suction Line - in. (mm) OD <sup>(a)</sup>	1-3/8 (34.90)	7/8 (22.23)	1-3/8 (34.90)	1-1/8 (28.60)
Liquid Line - in. (mm) OD <sup>(a)</sup>	1/2 (12.70)	1/2 (12.70)	1/2 (12.70)	1/2 (12.70)
<b>Outdoor Coil</b>				
Type	Lanced	Lanced	Lanced	Lanced
Tube Size - in. (mm) OD	3/8 (9.50)	3/8 (9.50)	3/8 (9.50)	3/8 (9.50)
Face Area, sq ft (m <sup>2</sup> )	19.24 (1.79)	19.24 (1.79)	19.24 (1.79)	23.96 (2.23)
Rows/FPI (Fins per inch)	2/18	2/18	2/18	2/18
<b>Outdoor Fan</b>				
Type	Propeller	Propeller	Propeller	Propeller
No. Used/Diameter - in. (mm)	1/26 (660.40)	1/26 (660.40)	1/26 (660.40)	1/26 (660.40)
Drive Type/No. Speeds	Direct/1	Direct/1	Direct/1	Direct/1
CFM (m <sup>3</sup> /h)	5,525 (9,387)	5,525 (9,387)	5,525 (9,387)	5,525 (9,387)
No. Motor/HP (kW)	1/0.33 (0.25)	1/0.33 (0.25)	1/0.33 (0.25)	1/0.33 (0.25)
Motor RPM	925	925	925	925
<b>Refrigerant Charge (Field Supplied)</b>				
lbs (kg) of R-410A	16.6 (7.5)	11.4/12.4 (5.2 / 5.6)	22.2 (10.1)	11.7/11.7 (5.3 / 5.3)
<b>Shipping Dimensions</b>				
HxWxD - in. (mm)	45" x 45" x 38" (1143 x 1143 x 965)	45" x 55" x 42" (1143 x 1397 x 1067)	45" x 45" x 38" (1143 x 1143 x 965)	45" x 55" x 42" (1143 x 1397 x 1067)

**Note:** Units are tested in accordance with AHRI Standard 340-360 (I-P)-2007. Rating conditions are 95°F outdoor air temperature, 80°F entering dry bulb, 67°F entering wet bulb with 25ft of interconnecting refrigerant piping with minimum external static pressure as determined by rating standard.

<sup>(a)</sup> Refer to refrigerant piping applications manual for line sizing and line length.



## General Data

**Table 7. General data for 8.33 - 16.7 ton (TWA1014DA\* - TWA2014DD\*) heat pump, 50 Hz**

	<b>8.33 Tons</b>	<b>8.33 Tons</b>	<b>13 Tons</b>	<b>16.7 Tons</b>
	<b>Single Compressor</b>	<b>Dual Compressor</b>	<b>Dual Compressor</b>	<b>Dual Compressor</b>
	<b>TWA1014DA*</b>	<b>TWA1014DD*</b>	<b>TWA1564DD*</b>	<b>TWA2014DD*</b>
<b>Cooling Performance - Gross Cooling Capacity</b>				
Matched Air Handler	TWE1014DA*	TWE1014DB*	TWE1564DB*	TWE2014DB*
AHRI Rated Airflow - (m <sup>3</sup> /hr)	3,333 (5663)	3,333 (5663)	5,000 (8495)	6,667 (11327)
Matched Air Handler - Btu (kW)	106,000 (31.0)	102,000 (29.9)	158,000 (46.3)	220,000 (64.5)
Condensing Unit Only - Btu (kW)	96,000 (28.1)	93,000 (27.3)	154,000 (45.1)	230,000 (67.4)
AHRI Net Cooling Capacity - Btu (kW)	103,000 (30.2)	99,000 (29.0)	156,000 (45.7)	214,000 (62.7)
<b>Efficiency</b>				
Matched Air Handler/Condensing Unit Only	11.8 / 12.9	11.8 / 13.0	11.6 / 12.8	10.7 / 13.2
System Power/Condensing Unit Power (kW)	8.3 / 7.4	7.9 / 7.1	13.5 / 12.2	19.2 / 17.4
<b>Heating Performance - AHRI Htg/Matched AH</b>				
High Temperature Capacity	90,000 (26.4)	88,000 (25.8)	158,000 (46.3)	194,000 (56.9)
System kW/COP	7 / 3.4	6.6 / 3.4	12.4 / 3.3	16.3 / 3.3
Low Temperature Capacity	59,000 (17.3)	54,500 (16)	91,000 (26.7)	118,000 (34.6)
System kW/COP	6.6 / 2.3	6.1 / 2.3	10.8 / 2.2	14.6 / 2.2
<b>Compressor</b>				
Type	Scroll	Scroll	Scroll	Scroll
No.	1	2	2	2
<b>System Data</b>				
No. Refrigerant Circuits <sup>(a)</sup>	1	2	2	2
Suction Line - in. (mm) OD <sup>(a)</sup>	1-3/8 (34.90)	1-1/8 (28.60)	1-1/8 (28.60)	1-3/8 (34.90)
Liquid Line - in. (mm) OD <sup>(a)</sup>	1/2 (12.70)	1/2 (12.70)	1/2 (12.70)	5/8 (15.88)
<b>Outdoor Coil</b>				
Type	Lanced	Lanced	Lanced	Lanced
Tube Size - in. (mm) OD	3/8 (9.50)	3/8 (9.50)	3/8 (9.50)	3/8 (9.50)
Face Area, sq ft (m <sup>2</sup> )	29.02 (2.70)	29.02 (2.70)	52.6 (4.89)	52.6 (4.89)
Rows/FPI (Fins per inch)	2/18	2/18	2/18	2/18
<b>Outdoor Fan</b>				
Type	Propeller	Propeller	Propeller	Propeller
No. Used/Diameter - in. (mm)	1/28 (711.20)	1/28 (711.20)	2/28 (711.20)	2/28 (711.20)
Drive Type/No. Speeds	Direct/1	Direct/1	Direct/1	Direct/1
CFM (m <sup>3</sup> /h)	8,250 (14,017)	8,250 (14,017)	16,354 (27,786)	16,354 (27,786)
No. Motor/HP (kW)	1/.75 (0.56)	1/.75 (0.56)	1/.75 (0.56)	1/.75 (0.56)
Motor RPM	925	925	925	925
<b>Refrigerant Charge (Field Supplied)</b>				
lbs (kg) of R-410A	34.7 (15.7)	14/14 (6.4 / 6.4)	19.2/19.9 (8.7 / 9.0)	18.6/18.4 (8.4 / 8.3)
<b>Shipping Dimensions</b>				
HxWxD - in. (mm)	52.1" x 55" x 42" (1323 x 1397 x 1067)	52.1" x 55" x 42" (1323 x 1397 x 1067)	51.1" x 96" x 48" (1298 x 2438 x 1219)	51.1" x 96" x 48" (1298 x 2438 x 1219)

**Note:** Units are tested in accordance with AHRI Standard 340-360 (I-P)-2007. Rating conditions are 95°F outdoor air temperature, 80°F entering dry bulb, 67°F entering wet bulb with 25ft of interconnecting refrigerant piping with minimum external static pressure as determined by rating standard.

<sup>(a)</sup> Refer to refrigerant piping applications manual for line sizing and line length.

**Table 8. General data for 4.6 - 6.25 ton (TWE0514DA\* - TWE0764DB\*) air handler, 50 Hz**

	<b>4.6 Tons Single Circuit TWE0514DA*</b>	<b>6 Tons Dual Circuit TWE0724DB*</b>	<b>6.25 Tons Single Circuit TWE0764DA*</b>	<b>6.25 Tons Dual Circuit TWE0764DB*</b>
<b>System Data</b>				
No. Refrigerant Circuits	1	2	1	2
Suction Line Connection, in. (mm) OD	1 1/8 (28.58)	1 1/8 (25.60)	1 3/8 (34.90)	1 1/8 (25.60)
Liquid Line Connection, in. (mm) OD	1/2 (12.70)	1/2 (12.70)	1/2 (12.70)	1/2 (12.70)
<b>Indoor Coil</b>				
Type	Lanced/Intertwined	Lanced/Intertwined	Lanced/Intertwined	Lanced/Intertwined
Tube Size, in. (mm)	3/8 (9.50)	3/8 (9.50)	3/8 (9.50)	3/8 (9.50)
Face Area, sq. ft. (m <sup>2</sup> )	5.0 (0.46)	8.1 (0.75)	8.1 (0.75)	8.1 (0.75)
Rows/FPI	4/14	4/14	4/14	4/14
Refrigerant Control	Expansion Valve	Expansion Valve	Expansion Valve	Expansion Valve
Drain Connection Size, in. (mm)	1.0 (25.40) PVC	1.0 (25.40) PVC	1.0 (25.40) PVC	1.0 (25.40) PVC
<b>Indoor Fan</b>				
Type	Centrifugal	Centrifugal	Centrifugal	Centrifugal
No. Used/Diameter x Width, in. (mm)	1/12 x 12 (304.8 x 304.8)	1/15 x 15 (381.0 x 381.0)	1/15 x 15 (381.0 x 381.0)	1/15 x 15 (381.0 x 381.0)
Drive Type/No. Speeds	Belt/Adjustable	Belt/Adjustable	Belt/Adjustable	Belt/Adjustable
CFM (m <sup>3</sup> /h) (Nominal)	2,000 (3,398)	2,000 (3,398)	2,500 (4,248)	2,500 (4,248)
No. Motors	1	1	1	1
Motor HP - Standard/Oversized (kw)	0.75/1.0 (0.56/0.75)	1.5/2.0/3.0 (1.10/1.50/2.2)	1.5/2.0/3.0 (1.10/1.50/2.2)	1.5/2.0/3.0 (1.10/1.50/2.2)
Motor RPM	1450	1450	1450	1450
Motor Frame Size	56	56H	56H	56H
<b>Filters</b>				
Type/Furnished	Throwaway/Yes	Throwaway/Yes	Throwaway/Yes	Throwaway/Yes
(No.)/Size Recommended	(1) 16 x 20 x 1; (1) 20 x 20 x 1	(3) 16 X 25 X 1	(3) 16 X 25 X 1	(3) 16 X 25 X 1
<b>Shipping Dimensions</b>				
HxWxD - in. (mm)	55.1" x 27.5" x 43.5" (1399.5 x 698.5 x 1104.9)	61.2" x 30.5" x 53" (1554.5 x 774.7 x 1346.2)	61.2" x 30.5" x 53" (1554.5 x 774.7 x 1346.2)	61.2" x 30.5" x 53" (1554.5 x 774.7 x 1346.2)

**Table 9. General data for 8.33 - 16.7 ton (TWE1014DA\* - TWE2014DB\*) air handler, 50 Hz**

	8.33 Tons Single Circuit TWE1014DA*	8.33 Tons Dual Circuit TWE1014DB*	10.4 Tons Dual Circuit TWE1264DB*	13 Tons Dual Circuit TWE1564DB*	16.7 Tons Dual Circuit TWE2014DB*
<b>System Data</b>					
No. Refrigerant Circuits	1	2	2	2	2
Suction Line Connection, in. (mm) OD	1 3/8 (34.90)	1 1/8 (25.60)	1 3/8 (34.90)	1 3/8 (34.90)	1 3/8 (34.90)
Liquid Line Connection, in. (mm) OD	1/2 (12.70)	1/2 (12.70)	1/2 (12.70)	1/2 (12.70)	5/8 (15.88)
<b>Indoor Coil</b>					
Type	Lanced/Intertwined	Lanced/Intertwined	Lanced/Intertwined	Lanced/Intertwined	Lanced/Intertwined
Tube Size, in. (mm)	3/8 (9.50)	3/8 (9.50)	3/8 (9.50)	3/8 (9.50)	3/8 (9.50)
Face Area, sq. ft. (m <sup>2</sup> )	11.2 (1.04)	11.2 (1.04)	16.3 (1.51)	16.3 (1.51)	21.7 (2.01)
Rows/FPI	4/14	4/14	4/14	4/14	3/14
Refrigerant Control	Expansion Valve	Expansion Valve	Expansion Valve	Expansion Valve	Expansion Valve
Drain Connection Size, in. (mm)	1.0 (25.40) PVC	1.0 (25.40) PVC	1.0 (25.40) PVC	1.0 (25.40) PVC	1.0 (25.40) PVC
<b>Indoor Fan</b>					
Type	Centrifugal	Centrifugal	Centrifugal	Centrifugal	Centrifugal
No. Used/Diameter x Width, in. (mm)	1/15 x 15 (381.0 x 381.0)	1/15 x 15 (381.0 x 381.0)	2/15 x 15 (381.0 x 381.0)	2/15 x 15 (381.0 x 381.0)	2/15 x 15 (381.0 x 381.0)
Drive Type/No. Speeds	Belt/Adjustable	Belt/Adjustable	Belt/Adjustable	Belt/Adjustable	Belt/Adjustable
CFM (m <sup>3</sup> /h) (Nominal)	3,350 (5,692)	3,350 (5,692)	4,200 (7,136)	5,000 (8,495)	6,675 (11,341)
No. Motors	1	1	1	1	1
Motor HP - Standard/Oversized (kw)	2.0 (1.50)	2.0/3.0 (1.50/2.20)	2.0/3.0/5.0 (1.50/2.20/3.70)	3.0/5.0 (2.20/3.70)	3.0/5.0/7.5 (2.20/ 3.70/5.60)
Motor RPM	1500	1500	1500	1,450/1,500	1,500/2,930
Motor Frame Size	56HZ	56HZ	145T	56HZ	184T
<b>Filters</b>					
Type/Furnished	Throwaway/Yes	Throwaway/Yes	Throwaway/Yes	Throwaway/Yes	Throwaway/Yes
(No.)/Size Recommended	(4) 16 X 25 X 1	(4) 16 X 25 X 1	(8) 15 X 20 X 2	(8) 15 X 20 X 2	(4) 16 X 25 X 2; (4) 16 X 20 X 2
<b>Shipping Dimensions</b>					
HxWxD - in. (mm)	61.2" x 30.5" x 69" (1554.5 x 774.7 x 1752.6)	61.2" x 30.5" x 69" (1554.5 x 774.7 x 1752.6)	76.3" x 33.8" x 85" (1938 x 850.9 x 2159)	76.3" x 33.8" x 85" (1938 x 850.9 x 2159)	79.1" x 35.8" x 95" (2009.1 x 909.3 x 2413)





# Performance Data

## Gross Cooling Capacities

Table 10. Gross cooling capacities (MBH) TWA0604\*A condensing unit with TWE0764\*A air handler (IP)

CFM	Ent DB (°F)	Ambient Temperature (°F)						Ambient Temperature (°F)						Ambient Temperature (°F)					
		85						95						105					
		Entering Wet Bulb (°F)						Entering Wet Bulb (°F)						Entering Wet Bulb (°F)					
		61		67		73		61		67		73		61		67		73	
		MBH	SHC	MBH	SHC	MBH	SHC	MBH	SHC	MBH	SHC	MBH	SHC	MBH	SHC	MBH	SHC	MBH	SHC
1800	75	64.6	53.9	72.1	42.1	80.2	29.7	61.5	52.4	68.7	40.7	76.5	28.3	58.2	50.9	65.1	39.2	72.5	26.9
	80	64.7	63.6	71.9	51.9	80.3	39.7	61.6	61.6	68.5	50.5	76.6	38.3	58.3	58.3	65.2	49.1	72.6	36.9
	85	64.7	64.7	72.3	61.7	80.4	49.7	61.7	61.7	68.9	60.3	76.7	48.3	58.4	58.4	65.3	58.8	72.7	46.9
	90	64.8	64.8	72.4	71.4	80.2	59.6	61.7	61.7	69.0	69.0	76.7	58.3	58.4	58.4	65.4	65.4	72.8	56.8
2000	75	65.8	57.1	73.4	44.0	81.5	30.2	62.7	55.6	69.9	42.6	77.6	28.8	59.2	54.0	66.2	41.1	73.5	27.4
	80	65.9	65.9	73.5	55.0	81.7	41.4	62.7	62.7	70.0	53.5	77.8	40.0	59.3	59.3	66.3	52.0	73.7	38.6
	85	66.0	66.0	73.6	65.7	81.8	52.5	62.8	62.8	70.1	64.3	77.9	51.1	59.4	59.4	66.4	62.8	73.4	49.6
	90	66.0	66.0	73.7	73.7	81.8	63.4	62.8	62.8	70.2	70.2	78.0	62.0	59.4	59.4	66.5	66.5	73.9	60.5
2200	75	66.9	60.2	74.5	45.9	82.6	30.7	63.6	58.7	70.9	44.5	78.6	29.3	60.1	57.1	67.0	43.0	74.4	27.9
	80	66.9	66.9	74.6	57.8	82.7	43.0	63.7	63.7	71.0	56.4	78.8	41.6	60.2	60.2	67.2	54.8	74.6	40.2
	85	67.0	67.0	74.7	69.7	82.5	55.1	63.7	63.7	71.1	68.2	78.5	53.8	60.2	60.2	67.3	66.7	74.3	52.3
	90	67.0	67.0	74.8	74.8	82.9	67.1	63.7	63.7	71.2	71.2	79.0	65.7	60.2	60.2	67.3	67.3	74.8	64.2
2400	75	67.7	63.3	75.4	47.7	83.5	31.2	64.4	61.7	71.7	46.3	79.4	29.8	60.8	60.1	67.8	44.8	75.1	28.4
	80	67.8	67.8	75.5	60.7	83.7	44.6	64.5	64.5	71.8	59.2	79.6	43.2	60.9	60.9	67.9	57.6	75.3	41.8
	85	67.9	67.9	75.6	73.6	83.4	57.9	64.5	64.5	71.9	71.9	79.7	56.4	60.9	60.9	68.0	68.0	75.4	54.9
	90	67.9	67.9	75.7	75.7	83.9	70.8	64.5	64.5	72.0	72.0	79.8	69.4	60.9	60.9	68.1	68.1	75.6	67.9
CFM	Ent DB (°F)	Ambient Temperature (°F)						Ambient Temperature (°F)											
		115						125											
		Entering Wet Bulb (°F)						Entering Wet Bulb (°F)											
		61		67		73		61		67		73							
		MBH	SHC	MBH	SHC	MBH	SHC	MBH	SHC	MBH	SHC	MBH	SHC						
1800	75	54.7	49.2	61.2	37.7	68.2	25.4	50.8	47.5	57.1	36.0	63.6	23.8						
	80	54.8	54.8	61.3	47.5	68.4	35.4	50.9	50.9	57.2	45.8	63.8	33.8						
	85	54.8	54.8	61.4	57.2	68.1	45.4	51.0	51.0	57.3	55.5	63.6	43.8						
	90	54.8	54.8	61.5	61.5	68.6	55.2	51.0	51.0	57.4	57.4	64.0	53.6						
2000	75	55.6	52.3	62.2	39.5	69.1	25.9	51.6	50.6	57.9	37.9	64.4	24.3						
	80	55.7	55.7	62.3	50.4	69.3	37.1	51.7	51.7	58.0	48.6	64.7	35.5						
	85	55.7	55.7	62.4	61.1	69.1	48.1	51.8	51.8	58.2	58.2	64.8	46.5						
	90	55.7	55.7	62.5	62.5	69.6	58.9	51.8	51.8	58.2	58.2	64.9	57.3						
2200	75	56.3	55.4	63.0	41.4	69.9	26.4	52.3	52.3	58.6	39.7	65.1	24.8						
	80	56.4	56.4	63.1	53.2	70.1	38.7	52.4	52.4	58.7	51.5	65.4	37.1						
	85	56.5	56.5	63.2	63.2	70.3	50.7	52.4	52.4	58.9	58.9	65.5	49.1						
	90	56.5	56.5	63.3	63.3	70.4	62.6	52.5	52.5	58.9	58.9	65.7	61.0						
2400	75	57.0	57.0	63.6	43.2	70.5	26.9	52.9	52.9	59.2	41.6	65.6	25.3						
	80	57.1	57.1	63.8	56.0	70.8	40.3	53.0	53.0	59.3	54.2	66.0	38.7						
	85	57.1	57.1	63.9	63.9	71.0	53.3	53.0	53.0	59.4	59.4	66.1	51.6						
	90	57.1	57.1	63.9	63.9	71.1	66.3	53.0	53.0	59.5	59.5	66.3	64.6						

Notes:

1. All capacities shown are gross and have not considered indoor fan heat. To obtain net cooling, subtract indoor fan heat.
2. MBH = Total Gross Capacity, SHC = Sensible Heat Capacity



Performance Data

Table 11. Gross cooling capacities (kW) TWA0604\*A condensing unit with TWE0764\*A air handler (SI)

Airflow m <sup>3</sup> /hr	Ent DB (°C)	Ambient Temperature (°C)						Ambient Temperature (°C)						Ambient Temperature (°C)					
		30						35						40					
		Entering Wet Bulb (°C)						Entering Wet Bulb (°C)						Entering Wet Bulb (°C)					
		16		19		22		16		19		22		16		19		22	
		kW	SHC	kW	SHC	kW	SHC	kW	SHC	kW	SHC	kW	SHC	kW	SHC	kW	SHC	kW	SHC
3058	24	18.5	15.5	20.7	12.1	22.9	8.5	17.6	15.1	19.7	11.7	21.9	8.1	16.7	14.6	18.6	11.2	20.7	7.7
	27	18.5	18.3	20.6	14.9	23.0	11.4	17.7	17.7	19.6	14.5	21.9	11.0	16.7	16.7	18.7	14.1	20.7	10.6
	30	18.6	18.6	20.7	17.7	22.9	14.2	17.7	17.7	19.7	17.3	21.9	13.9	16.7	16.7	18.7	16.9	20.8	13.5
	33	18.6	18.6	20.7	20.5	22.9	17.1	17.7	17.7	19.8	19.8	21.9	16.7	16.7	16.7	18.7	18.7	20.8	16.3
3398	24	18.9	16.4	21.0	12.6	23.3	8.6	18.0	16.0	20.0	12.2	22.2	8.2	17.0	15.5	18.9	11.8	21.0	7.8
	27	18.9	18.9	21.0	15.8	23.3	11.8	18.0	18.0	20.0	15.4	22.2	11.5	17.0	17.0	19.0	14.9	21.0	11.0
	30	18.9	18.9	21.1	18.9	23.4	15.0	18.0	18.0	20.1	18.5	22.2	14.6	17.0	17.0	19.0	18.0	21.1	14.2
	33	18.9	18.9	21.1	21.1	23.4	18.2	18.0	18.0	20.1	20.1	22.3	17.8	17.0	17.0	19.0	19.0	21.1	17.4
3738	24	19.2	17.3	21.3	13.2	23.6	8.8	18.2	16.9	20.3	12.7	22.4	8.4	17.2	16.4	19.2	12.3	21.2	8.0
	27	19.2	19.2	21.3	16.6	23.6	12.3	18.2	18.2	20.3	16.2	22.5	11.9	17.2	17.2	19.2	15.7	21.3	11.5
	30	19.2	19.2	21.4	20.0	23.7	15.8	18.3	18.3	20.3	19.6	22.5	15.4	17.2	17.2	19.2	19.1	21.3	15.0
	33	19.2	19.2	21.4	21.4	23.7	19.3	18.3	18.3	20.4	20.4	22.5	18.8	17.2	17.2	19.3	19.3	21.4	18.4
4078	24	19.4	18.2	21.6	13.7	23.8	8.9	18.4	17.7	20.5	13.3	22.7	8.5	17.4	17.3	19.4	12.8	21.4	8.1
	27	19.4	19.4	21.6	17.4	23.9	12.8	18.5	18.5	20.5	17.0	22.7	12.4	17.4	17.4	19.4	16.5	21.5	12.0
	30	19.4	19.4	21.6	21.1	23.9	16.6	18.5	18.5	20.6	20.6	22.8	16.2	17.4	17.4	19.5	19.5	21.5	15.8
	33	19.4	19.4	21.6	21.6	23.9	20.3	18.5	18.5	20.6	20.6	22.8	19.9	17.4	17.4	19.5	19.5	21.6	19.5
Airflow m <sup>3</sup> /hr	Ent DB (°C)	Ambient Temperature (°C)						Ambient Temperature (°C)											
		45						52											
		Entering Wet Bulb (°C)						Entering Wet Bulb (°C)											
		16		19		22		16		19		22							
		kW	SHC	kW	SHC	kW	SHC	kW	SHC	kW	SHC	kW	SHC						
3058	24	15.7	14.1	17.5	10.8	19.5	7.2	14.5	13.6	16.3	10.3	18.2	6.8						
	27	15.7	15.7	17.5	13.6	19.5	10.1	14.6	14.6	16.3	13.1	18.2	9.7						
	30	15.7	15.7	17.6	16.4	19.6	13.0	14.6	14.6	16.4	15.9	18.3	12.6						
	33	15.7	15.7	17.6	17.6	19.6	15.8	14.6	14.6	16.4	16.4	18.3	15.4						
3398	24	15.9	15.0	17.8	11.3	19.7	7.4	14.8	14.5	16.6	10.9	18.4	6.9						
	27	15.9	15.9	17.8	14.5	19.8	10.6	14.8	14.8	16.6	14.0	18.5	10.2						
	30	16.0	16.0	17.9	17.6	19.8	13.8	14.8	14.8	16.6	16.6	18.5	13.4						
	33	16.0	16.0	17.9	17.9	19.9	16.9	14.8	14.8	16.6	16.6	18.5	16.4						
3738	24	16.1	15.9	18.0	11.9	20.0	7.5	15.0	15.0	16.7	11.4	18.6	7.1						
	27	16.2	16.2	18.0	15.3	20.0	11.1	15.0	15.0	16.8	14.8	18.7	10.6						
	30	16.2	16.2	18.1	18.1	20.1	14.6	15.0	15.0	16.8	16.8	18.7	14.1						
	33	16.2	16.2	18.1	18.1	20.1	18.0	15.0	15.0	16.8	16.8	18.7	17.5						
4078	24	16.3	16.3	18.2	12.4	20.1	7.7	15.1	15.1	16.9	11.9	18.7	7.2						
	27	16.3	16.3	18.2	16.1	20.2	11.5	15.1	15.1	17.0	15.6	18.8	11.1						
	30	16.3	16.3	18.3	18.3	20.2	15.3	15.2	15.2	17.0	17.0	18.9	14.8						
	33	16.3	16.3	18.3	18.3	20.3	19.0	15.2	15.2	17.0	17.0	18.9	18.5						

Notes:

1. All capacities shown are gross and have not considered indoor fan heat. To obtain net cooling, subtract indoor fan heat.
2. kW = Total Gross Capacity, SHC = Sensible Heat Capacity

**Table 12. Gross cooling capacities (MBH) TWA0604\*D condensing unit with TWE0724\*B air handler (IP)**

CFM	Ent DB (°F)	Ambient Temperature (°F)						Ambient Temperature (°F)						Ambient Temperature (°F)					
		85						95						105					
		Entering Wet Bulb (°F)						Entering Wet Bulb (°F)						Entering Wet Bulb (°F)					
		61		67		73		61		67		73		61		67		73	
		MBH	SHC	MBH	SHC	MBH	SHC	MBH	SHC	MBH	SHC	MBH	SHC	MBH	SHC	MBH	SHC	MBH	SHC
1800	75	61.0	49.5	68.3	38.4	72.9	26.9	55.6	48.2	62.2	37.2	69.5	25.7	52.8	46.9	59.0	35.9	66.0	24.5
	80	58.6	58.6	64.9	47.5	72.6	36.2	56.4	56.4	61.9	46.3	69.2	35.0	54.1	54.1	58.7	45.0	65.6	33.7
	85	64.9	64.9	64.9	56.6	72.3	45.4	59.7	59.7	61.9	55.4	68.8	44.1	57.2	57.2	58.8	54.1	65.3	42.9
	90	65.4	65.4	65.5	65.5	72.0	54.6	62.9	62.9	63.0	63.0	71.9	55.9	60.4	60.4	60.5	60.5	65.1	52.1
2000	75	59.5	52.4	66.4	40.1	74.1	27.5	56.7	51.1	63.3	38.9	70.6	26.2	53.8	49.8	60.0	37.6	66.9	24.9
	80	60.8	60.8	66.1	50.2	73.8	37.7	58.4	58.4	63.0	49.0	70.3	36.4	55.9	55.9	59.7	47.7	66.6	35.2
	85	64.3	64.3	66.2	60.3	73.5	47.9	61.8	61.8	63.2	59.0	69.9	46.6	59.0	59.0	60.0	57.7	66.3	45.4
	90	67.8	67.8	68.0	68.0	73.2	58.0	65.2	65.2	65.4	65.4	69.7	56.7	62.6	62.6	62.7	62.7	66.2	55.4
2200	75	60.5	55.2	67.4	41.8	75.1	27.9	57.7	53.9	64.1	40.6	71.5	26.7	54.7	52.5	63.7	41.1	67.7	25.4
	80	62.6	62.6	67.1	52.9	74.8	39.1	63.0	63.0	63.9	51.7	71.2	37.9	57.5	57.5	60.6	50.2	67.4	36.6
	85	66.3	66.3	67.4	63.9	74.5	50.3	63.7	63.7	64.4	62.6	70.8	49.0	61.0	61.0	61.3	60.3	67.1	47.8
	90	70.0	70.0	70.1	70.1	74.4	61.3	67.3	67.3	70.6	70.6	70.8	60.0	64.5	64.5	64.6	64.6	67.1	58.7
2400	75	61.2	58.6	68.2	43.5	76.0	28.4	58.6	56.7	64.9	42.2	72.3	27.2	55.5	55.5	61.5	40.9	68.4	25.9
	80	64.3	64.3	68.0	55.4	75.7	40.6	61.7	61.7	64.8	54.1	71.8	39.3	58.9	58.9	64.3	55.2	68.1	38.0
	85	68.1	68.1	68.6	67.5	75.4	52.7	65.4	65.4	65.7	65.0	71.6	51.4	62.5	62.5	62.6	62.6	67.8	50.1
	90	71.9	71.9	72.1	72.1	75.3	64.6	69.1	69.1	69.2	69.2	71.7	63.3	66.1	66.1	66.2	66.2	68.0	62.0
CFM	Ent DB (°F)	Ambient Temperature (°F)						Ambient Temperature (°F)											
		115						125											
		Entering Wet Bulb (°F)						Entering Wet Bulb (°F)											
		61		67		73		61		67		73							
		MBH	SHC	MBH	SHC	MBH	SHC	MBH	SHC	MBH	SHC	MBH	SHC						
1800	75	49.9	45.6	55.7	34.6	62.3	23.2	46.9	44.2	52.3	33.3	58.5	21.9						
	80	51.6	51.6	55.5	43.8	61.9	32.4	49.0	49.0	52.1	42.4	58.1	31.1						
	85	54.7	54.7	55.6	52.8	61.6	41.6	52.0	52.0	52.5	50.7	57.7	40.3						
	90	57.7	57.7	57.8	57.8	61.4	50.7	54.9	54.9	55.0	55.0	57.7	49.4						
2000	75	53.2	50.7	56.6	36.3	63.1	23.7	47.9	46.3	53.1	34.9	59.2	22.3						
	80	53.3	53.3	56.4	46.4	62.8	33.9	50.6	50.6	52.9	44.9	58.9	32.6						
	85	56.5	56.5	56.9	55.5	62.5	44.1	53.7	53.7	53.8	53.6	58.6	42.7						
	90	59.7	59.7	59.8	59.8	62.4	54.1	56.7	56.7	56.8	56.8	58.6	52.7						
2200	75	51.9	50.5	57.3	37.9	63.9	24.1	48.9	48.9	53.7	36.6	59.8	22.8						
	80	54.9	54.9	57.2	48.9	66.6	37.0	52.0	52.0	53.7	47.5	59.5	34.0						
	85	58.1	58.1	58.2	58.2	63.2	46.4	55.2	55.2	55.2	55.2	59.3	45.0						
	90	61.5	61.5	61.6	61.6	63.3	57.4	58.3	58.3	58.4	58.4	59.3	56.0						
2400	75	52.8	52.8	57.9	39.5	64.4	24.5	50.0	50.0	54.2	38.1	60.3	23.2						
	80	56.2	56.2	57.9	51.4	64.2	36.7	53.2	53.2	54.1	50.4	60.1	35.4						
	85	59.6	59.6	59.7	59.7	63.9	48.7	56.5	56.5	56.5	56.5	59.8	47.3						
	90	63.0	63.0	63.1	63.1	64.0	60.7	59.7	59.7	59.8	59.8	59.9	59.9						

**Notes:**

- All capacities shown are gross and have not considered indoor fan heat. To obtain net cooling, subtract indoor fan heat.
- MBH = Total Gross Capacity, SHC = Sensible Heat Capacity



**Performance Data**

**Table 13. Gross cooling capacities (kW) TWA0604\*D condensing unit with TWE0724\*B air handler (SI)**

Airflow m <sup>3</sup> /hr	Ent DB (°C)	Ambient Temperature (°C)						Ambient Temperature (°C)						Ambient Temperature (°C)					
		30						35						40					
		Entering Wet Bulb (°C)						Entering Wet Bulb (°C)						Entering Wet Bulb (°C)					
		16		19		22		16		19		22		16		19		22	
		kW	SHC	kW	SHC	kW	SHC	kW	SHC	kW	SHC	kW	SHC	kW	SHC	kW	SHC	kW	SHC
3058	24	17.9	14.5	20.0	11.3	21.4	7.9	16.3	14.1	18.2	10.9	20.4	7.5	15.5	13.7	17.3	10.5	19.3	7.2
	27	17.2	17.2	19.0	13.9	21.3	10.6	16.5	16.5	18.1	13.6	20.3	10.2	15.8	15.8	17.2	13.2	19.2	9.9
	30	19.0	19.0	19.0	16.6	21.2	13.3	17.5	17.5	18.1	16.2	20.2	12.9	16.8	16.8	17.2	15.9	19.1	12.6
	33	19.2	19.2	19.2	19.2	21.1	16.0	18.4	18.4	18.5	18.5	21.1	16.4	17.7	17.7	17.7	17.7	19.1	15.3
3398	24	17.4	15.3	19.5	11.8	21.7	8.0	16.6	15.0	18.5	11.4	20.7	7.7	15.8	14.6	17.6	11.0	19.6	7.3
	27	17.8	17.8	19.4	14.7	21.6	11.0	17.1	17.1	18.5	14.4	20.6	10.7	16.4	16.4	17.5	14.0	19.5	10.3
	30	18.8	18.8	19.4	17.7	21.5	14.0	18.1	18.1	18.5	17.3	20.5	13.7	17.3	17.3	17.6	16.9	19.4	13.3
	33	19.9	19.9	19.9	19.9	21.5	17.0	19.1	19.1	19.2	19.2	20.4	16.6	18.3	18.3	18.4	18.4	19.4	16.2
3738	24	17.7	16.2	19.8	12.3	22.0	8.2	16.9	15.8	18.8	11.9	21.0	7.8	16.0	15.4	18.7	12.1	19.9	7.4
	27	18.3	18.3	19.7	15.5	21.9	11.5	18.5	18.5	18.7	15.1	20.9	11.1	16.9	16.9	17.8	14.7	19.8	10.7
	30	19.4	19.4	19.8	18.7	21.8	14.7	18.7	18.7	18.9	18.4	20.8	14.4	17.9	17.9	18.0	17.7	19.7	14.0
	33	20.5	20.5	20.6	20.6	21.8	18.0	19.7	19.7	20.7	20.7	20.7	17.6	18.9	18.9	18.9	18.9	19.7	17.2
4078	24	17.9	17.2	20.0	12.7	22.3	8.3	17.2	16.6	19.0	12.4	21.2	8.0	16.3	16.3	18.0	12.0	20.0	7.6
	27	18.8	18.8	19.9	16.2	22.2	11.9	18.1	18.1	19.0	15.9	21.1	11.5	17.3	17.3	18.8	16.2	20.0	11.1
	30	20.0	20.0	20.1	19.8	22.1	15.4	19.2	19.2	19.2	19.1	21.0	15.1	18.3	18.3	18.4	18.4	19.9	14.7
	33	21.1	21.1	21.1	21.1	22.1	18.9	20.2	20.2	20.3	20.3	21.0	18.6	19.4	19.4	19.4	19.4	19.9	18.2
Airflow m <sup>3</sup> /hr	Ent DB (°C)	Ambient Temperature (°C)						Ambient Temperature (°C)											
		45						52											
		Entering Wet Bulb (°C)						Entering Wet Bulb (°C)											
		16		19		22		16		19		22							
		kW	SHC	kW	SHC	kW	SHC	kW	SHC	kW	SHC	kW	SHC						
3058	24	14.6	13.4	16.3	10.1	18.3	6.8	13.7	13.0	15.3	9.7	17.1	6.4						
	27	15.1	15.1	16.3	12.8	18.2	9.5	14.4	14.4	15.3	12.4	17.0	9.1						
	30	16.0	16.0	16.3	15.5	18.1	12.2	15.2	15.2	15.4	14.9	16.9	11.8						
	33	16.9	16.9	16.9	16.9	18.0	14.9	16.1	16.1	16.1	16.1	16.9	14.5						
3398	24	15.6	14.9	16.6	10.6	18.5	6.9	14.0	13.6	15.6	10.2	17.4	6.5						
	27	15.6	15.6	16.5	13.6	18.4	9.9	14.8	14.8	15.5	13.2	17.3	9.5						
	30	16.6	16.6	16.7	16.3	18.3	12.9	15.7	15.7	15.8	15.7	17.2	12.5						
	33	17.5	17.5	17.5	17.5	18.3	15.9	16.6	16.6	16.7	16.7	17.2	15.5						
3738	24	15.2	14.8	16.8	11.1	18.7	7.1	14.3	14.3	15.7	10.7	17.5	6.7						
	27	16.1	16.1	16.8	14.3	19.5	10.8	15.2	15.2	15.7	13.9	17.4	10.0						
	30	17.0	17.0	17.1	17.1	18.5	13.6	16.2	16.2	16.2	16.2	17.4	13.2						
	33	18.0	18.0	18.0	18.0	18.6	16.8	17.1	17.1	17.1	17.1	17.4	16.4						
4078	24	15.5	15.5	17.0	11.6	18.9	7.2	14.6	14.6	15.9	11.2	17.7	6.8						
	27	16.5	16.5	17.0	15.1	18.8	10.8	15.6	15.6	15.9	14.8	17.6	10.4						
	30	17.5	17.5	17.5	17.5	18.7	14.3	16.5	16.5	16.6	16.6	17.5	13.9						
	33	18.5	18.5	18.5	18.5	18.8	17.8	17.5	17.5	17.5	17.5	17.6	17.6						

**Notes:**

1. All capacities shown are gross and have not considered indoor fan heat. To obtain net cooling, subtract indoor fan heat.
2. kW = Total Gross Capacity, SHC = Sensible Heat Capacity

**Table 14. Gross cooling capacities (MBH) TWA0764\*A condensing unit with TWE0764\*A air handler (IP)**

CFM	Ent DB (°F)	Ambient Temperature (°F)						Ambient Temperature (°F)						Ambient Temperature (°F)					
		85						95						105					
		Entering Wet Bulb (°F)						Entering Wet Bulb (°F)						Entering Wet Bulb (°F)					
		61		67		73		61		67		73		61		67		73	
		MBH	SHC	MBH	SHC	MBH	SHC	MBH	SHC	MBH	SHC	MBH	SHC	MBH	SHC	MBH	SHC	MBH	SHC
2250	75	72.2	63.5	80.3	48.3	89.0	32.7	68.8	61.9	76.4	46.7	84.7	31.2	65.2	60.4	72.2	45.1	80.1	29.6
	80	73.2	73.2	80.0	60.6	88.7	45.2	70.3	70.3	76.0	59.1	84.3	43.6	67.2	67.2	71.9	57.5	79.7	42.0
	85	77.2	77.2	80.0	73.0	88.4	57.6	74.2	74.2	76.2	71.5	84.0	56.0	70.9	70.9	72.2	69.9	79.4	54.4
	90	81.3	81.3	81.4	81.4	88.1	69.9	78.1	78.1	78.2	78.2	83.8	68.4	74.7	74.7	74.8	74.8	79.2	66.9
2500	75	73.6	67.6	81.5	50.6	90.3	33.3	70.0	66.0	77.5	49.1	85.8	31.8	66.2	64.3	73.2	47.4	81.1	30.2
	80	75.6	75.6	81.2	64.3	90.0	47.2	72.5	72.5	77.2	62.8	85.5	45.6	69.2	69.2	73.0	61.2	80.7	44.0
	85	79.7	79.7	81.5	78.2	89.7	61.0	76.5	76.5	77.6	76.6	85.2	59.4	73.1	73.1	73.6	73.6	80.4	57.8
	90	84.0	84.0	84.1	84.1	89.5	74.8	80.6	80.6	80.7	80.7	85.0	73.3	77.0	77.0	77.1	77.1	80.4	71.7
2750	75	74.7	71.6	82.6	53.0	91.4	33.9	71.1	70.0	78.4	51.4	86.8	32.4	67.4	67.4	74.1	49.7	81.9	30.8
	80	77.6	77.6	82.3	68.1	91.1	49.2	74.4	74.4	78.2	66.5	86.4	47.6	71.0	71.0	73.9	64.9	81.6	46.0
	85	82.0	82.0	82.9	82.9	90.7	64.4	78.6	78.6	79.0	79.0	86.1	62.8	75.0	75.0	75.0	75.0	81.3	61.2
	90	86.4	86.4	86.5	86.5	90.7	79.6	82.8	82.8	82.9	82.9	86.1	78.1	79.0	79.0	79.2	79.2	81.4	76.5
3000	75	75.8	75.6	83.5	55.2	92.3	34.5	72.2	72.2	79.2	53.7	87.6	33.0	68.4	68.4	74.8	52.0	82.6	31.3
	80	79.4	79.4	83.3	71.8	92.0	51.2	76.1	76.1	79.1	70.2	87.2	49.6	72.5	72.5	74.7	68.6	82.3	48.0
	85	83.9	83.9	84.2	84.2	91.6	67.8	80.4	80.4	80.5	80.5	86.9	66.2	76.6	76.6	76.7	76.7	82.0	64.6
	90	88.5	88.5	88.3	88.3	91.7	84.4	84.8	84.8	84.9	84.9	87.1	82.9	80.8	80.8	80.9	80.9	82.3	81.2
CFM	Ent DB (°F)	Ambient Temperature (°F)						Ambient Temperature (°F)											
		115						125											
		Entering Wet Bulb (°F)						Entering Wet Bulb (°F)											
		61		67		73		61		67		73							
		MBH	SHC	MBH	SHC	MBH	SHC	MBH	SHC	MBH	SHC	MBH	SHC						
2250	75	61.5	58.8	67.9	43.4	75.3	27.9	57.7	57.1	63.6	41.8	70.3	26.3						
	80	63.9	63.9	67.7	55.8	75.0	40.4	60.5	60.5	63.4	54.2	70.0	38.7						
	85	67.5	67.5	68.1	68.1	74.6	52.8	63.8	63.8	63.9	63.9	69.7	51.2						
	90	71.1	71.1	71.2	71.2	74.5	65.3	67.3	67.3	67.4	67.4	69.7	63.6						
2500	75	62.6	62.6	68.8	45.8	76.2	28.5	58.8	58.8	64.4	44.1	71.1	26.9						
	80	65.7	65.7	68.6	59.5	75.9	42.4	62.2	62.2	64.3	57.9	70.8	40.7						
	85	69.5	69.5	69.6	69.6	75.5	56.2	65.7	65.7	65.7	65.7	70.5	54.5						
	90	73.2	73.2	73.3	73.3	75.6	70.1	69.2	69.2	69.3	69.3	70.6	68.4						
2750	75	63.7	63.7	69.5	48.0	77.0	29.1	60.1	60.1	65.0	46.4	71.8	27.4						
	80	67.3	67.3	69.5	63.2	76.6	44.4	63.7	63.7	65.0	61.6	71.4	42.7						
	85	71.2	71.2	71.3	71.3	76.3	59.6	67.2	67.2	67.3	67.3	71.1	57.9						
	90	75.1	75.1	75.2	75.2	76.5	74.8	70.9	70.9	71.0	71.0	71.6	71.6						
3000	75	64.9	64.9	70.2	50.3	77.6	29.7	61.3	61.3	65.6	48.6	72.3	28.0						
	80	68.8	68.8	70.2	66.9	77.2	46.4	64.9	64.9	65.6	65.1	71.9	44.7						
	85	72.7	72.7	72.8	72.8	76.9	63.0	68.6	68.6	68.6	68.6	71.7	61.3						
	90	76.7	76.7	76.8	76.8	77.5	77.5	72.3	72.3	71.6	71.6	72.5	72.5						

**Notes:**

1. All capacities shown are gross and have not considered indoor fan heat. To obtain net cooling, subtract indoor fan heat.
2. MBH = Total Gross Capacity, SHC = Sensible Heat Capacity



**Performance Data**

**Table 15. Gross cooling capacities (kW) TWA0764\*A condensing unit with TWE0764\*A air handler (SI)**

Airflow m <sup>3</sup> /hr	Ent DB (°C)	Ambient Temperature (°C)						Ambient Temperature (°C)						Ambient Temperature (°C)					
		30						35						40					
		Entering Wet Bulb (°C)						Entering Wet Bulb (°C)						Entering Wet Bulb (°C)					
		16		19		22		16		19		22		16		19		22	
kW SHC		kW SHC		kW SHC		kW SHC		kW SHC		kW SHC		kW SHC		kW SHC		kW SHC			
3823	24	21.0	18.5	23.3	14.1	25.7	9.5	20.0	18.1	22.1	13.6	24.4	9.0	18.9	17.6	20.9	13.1	23.1	8.5
	27	21.3	21.3	23.2	17.7	25.6	13.1	20.4	20.4	22.0	17.2	24.3	12.7	19.5	19.5	20.8	16.7	23.0	12.2
	30	22.4	22.4	23.2	21.3	25.5	16.7	21.5	21.5	22.1	20.9	24.2	16.3	20.6	20.6	20.9	20.4	22.9	15.8
	33	23.6	23.6	23.6	23.6	25.5	20.4	22.6	22.6	22.7	22.7	24.2	19.9	21.6	21.6	21.7	21.7	22.9	19.5
4248	24	21.4	19.7	23.6	14.7	26.1	9.6	20.3	19.3	22.4	14.3	24.8	9.2	19.2	18.8	21.2	13.8	23.4	8.7
	27	22.0	22.0	23.5	18.8	26.0	13.7	21.0	21.0	22.3	18.3	24.7	13.2	20.1	20.1	21.1	17.8	23.3	12.8
	30	23.2	23.2	23.6	22.8	25.9	17.7	22.2	22.2	22.5	22.4	24.6	17.3	21.2	21.2	21.3	21.3	23.2	16.8
	33	24.4	24.4	24.4	24.4	25.9	21.8	23.4	23.4	23.3	23.3	24.5	21.3	22.3	22.3	22.3	22.3	23.2	20.9
4672	24	21.7	20.9	23.9	15.4	26.4	9.8	20.6	20.4	22.7	14.9	25.0	9.4	19.5	19.5	21.4	14.5	23.6	8.9
	27	22.5	22.5	23.8	19.8	26.3	14.3	21.6	21.6	22.6	19.4	24.9	13.8	20.6	20.6	21.4	18.9	23.5	13.4
	30	23.8	23.8	24.0	24.0	26.2	18.7	22.8	22.8	22.9	22.9	24.8	18.3	21.7	21.7	21.7	21.7	23.4	17.8
	33	25.0	25.0	25.1	25.1	26.2	23.2	24.0	24.0	24.0	24.0	24.8	22.8	22.9	22.9	22.9	22.9	23.5	22.3
5097	24	22.0	22.0	24.1	16.1	26.6	10.0	20.9	20.9	22.9	15.6	25.3	9.5	19.8	19.8	21.6	15.1	23.8	9.1
	27	23.1	23.1	24.1	20.9	26.5	14.9	22.1	22.1	22.9	20.5	25.1	14.4	21.0	21.0	21.6	20.0	23.7	13.9
	30	24.3	24.3	24.4	24.4	26.4	19.7	23.3	23.3	23.3	23.3	25.0	19.3	22.2	22.2	22.2	22.2	23.6	18.8
	33	25.6	25.6	25.7	25.7	26.5	24.6	24.5	24.5	24.6	24.6	25.1	24.2	23.4	23.4	23.4	23.4	23.7	23.7
Airflow m <sup>3</sup> /hr	Ambient Temperature (°C)						Ambient Temperature (°C)												
	45						52												
	Entering Wet Bulb (°C)						Entering Wet Bulb (°C)												
	16		19		22		16		19		22								
kW SHC		kW SHC		kW SHC		kW SHC		kW SHC		kW SHC									
3823	17.8	17.1	19.6	12.6	21.7	8.1	16.7	16.7	18.4	12.2	20.3	7.6							
	18.5	18.5	19.6	16.3	21.6	11.7	17.6	17.6	18.3	15.8	20.2	11.2							
	19.6	19.6	19.7	19.7	21.5	15.4	18.5	18.5	18.5	18.5	20.1	14.9							
	20.6	20.6	20.6	20.6	21.5	19.0	19.5	19.5	19.5	19.5	20.1	18.5							
4248	18.1	18.1	19.9	13.3	22.0	8.2	17.1	17.1	18.6	12.8	20.5	7.8							
	19.1	19.1	19.8	17.3	21.9	12.3	18.0	18.0	18.5	16.9	20.4	11.8							
	20.1	20.1	20.1	20.1	21.8	16.4	19.0	19.0	19.0	19.0	20.3	15.9							
	21.2	21.2	21.1	21.1	21.8	20.4	20.0	20.0	20.0	20.0	20.4	19.9							
4672	18.5	18.5	20.1	14.0	22.2	8.4	17.4	17.4	18.8	13.5	20.7	7.9							
	19.5	19.5	20.1	18.4	22.1	12.9	18.4	18.4	18.8	17.9	20.6	12.4							
	20.6	20.6	20.6	20.6	22.0	17.3	19.4	19.4	19.5	19.5	20.5	16.9							
	21.7	21.7	21.7	21.7	22.1	21.8	20.5	20.5	20.5	20.5	20.6	20.6							
5097	18.8	18.8	20.3	14.6	22.3	8.6	17.8	17.8	18.9	14.1	20.8	8.1							
	19.9	19.9	20.3	19.5	22.2	13.5	18.8	18.8	19.0	19.0	20.7	13.0							
	21.0	21.0	21.1	21.1	22.2	18.3	19.8	19.8	19.8	19.8	20.6	17.8							
	22.2	22.2	22.2	22.2	22.3	22.3	20.9	20.9	20.9	20.9	20.9	20.9							

**Notes:**

1. All capacities shown are gross and have not considered indoor fan heat. To obtain net cooling, subtract indoor fan heat.
2. kW = Total Gross Capacity, SHC = Sensible Heat Capacity

**Table 16. Gross cooling capacities (MBH) TWA0764\*D condensing unit with TWE0764\*B air handler (IP)**

CFM	Ent DB (°F)	Ambient Temperature (°F)						Ambient Temperature (°F)						Ambient Temperature (°F)					
		85						95						105					
		Entering Wet Bulb (°F)						Entering Wet Bulb (°F)						Entering Wet Bulb (°F)					
		61		67		73		61		67		73		61		67		73	
		MBH	SHC	MBH	SHC	MBH	SHC	MBH	SHC	MBH	SHC	MBH	SHC	MBH	SHC	MBH	SHC	MBH	SHC
2250	75	74.9	61.3	83.7	47.5	89.5	33.0	69.3	60.0	77.3	46.1	86.0	31.8	66.3	58.7	73.9	44.8	82.0	30.4
	80	72.6	72.6	80.0	58.7	89.0	44.5	70.2	70.2	76.7	57.4	85.3	43.1	67.7	67.7	73.3	56.0	81.4	41.7
	85	79.5	79.5	79.8	70.0	88.4	55.8	74.0	74.0	76.6	68.7	84.5	54.4	71.3	71.3	73.1	67.3	80.8	53.1
	90	80.5	80.5	80.7	80.7	87.9	67.1	77.8	77.8	77.9	77.9	87.3	68.3	75.0	75.0	75.1	75.1	80.3	64.4
2500	75	73.6	64.9	82.0	49.6	90.9	33.6	70.6	63.6	78.5	48.2	87.2	32.3	67.5	62.2	75.0	46.8	83.1	30.9
	80	75.1	75.1	81.3	62.0	90.4	46.3	72.6	72.6	78.0	60.7	86.6	44.9	69.9	69.9	74.5	59.3	82.5	43.5
	85	79.2	79.2	81.3	74.6	89.8	58.8	76.5	76.5	78.0	73.2	85.8	57.4	73.7	73.7	74.6	71.8	81.9	56.0
	90	83.4	83.4	83.5	83.5	89.3	71.3	80.4	80.4	80.6	80.6	85.4	70.0	77.5	77.5	77.6	77.6	81.5	68.6
2750	75	74.8	68.4	83.1	51.6	92.1	34.2	71.5	67.8	79.6	50.2	88.2	32.9	68.5	65.7	78.9	50.7	84.1	31.5
	80	77.3	77.3	82.5	65.2	91.5	48.0	77.5	77.5	79.1	63.8	87.6	46.6	71.8	71.8	75.4	62.4	83.4	45.2
	85	81.6	81.6	82.8	79.0	90.9	61.7	78.7	78.7	79.4	77.7	86.8	60.3	75.7	75.7	76.1	74.8	82.8	58.9
	90	85.8	85.8	85.9	85.9	90.5	75.4	82.7	82.7	86.1	86.1	86.5	74.0	79.6	79.6	79.7	79.7	82.5	72.6
3000	75	75.7	72.4	84.1	53.5	93.0	34.7	72.8	70.3	80.4	52.1	89.1	33.4	69.5	69.5	76.7	50.7	84.8	32.0
	80	79.2	79.2	83.5	68.3	92.4	49.7	76.5	76.5	80.0	66.9	88.4	48.3	73.5	73.5	79.2	68.0	84.2	46.9
	85	83.6	83.6	84.1	83.3	91.8	64.5	80.7	80.7	80.9	80.3	87.6	63.1	77.5	77.5	77.6	77.6	83.5	61.8
	90	88.0	88.0	88.1	88.1	91.6	79.4	84.8	84.8	84.9	84.9	87.5	78.0	81.5	81.5	81.6	81.6	83.0	77.5
CFM	Ent DB (°F)	Ambient Temperature (°F)						Ambient Temperature (°F)											
		115						125											
		Entering Wet Bulb (°F)						Entering Wet Bulb (°F)											
		61		67		73		61		67		73							
		MBH	SHC	MBH	SHC	MBH	SHC	MBH	SHC	MBH	SHC	MBH	SHC						
2250	75	63.1	57.2	70.3	43.3	77.9	28.9	59.8	55.8	66.5	41.9	73.8	27.5						
	80	65.0	65.0	69.7	54.6	77.3	40.3	62.1	62.1	66.0	53.1	73.1	38.9						
	85	68.5	68.5	69.7	66.0	76.7	51.7	65.5	65.5	66.1	64.0	75.0	52.1						
	90	72.0	72.0	72.1	72.1	76.2	63.0	68.7	68.7	68.8	68.8	71.9	61.5						
2500	75	66.6	63.3	71.3	45.4	78.9	29.5	61.0	58.7	67.4	43.9	74.6	28.0						
	80	67.1	67.1	70.8	57.8	78.3	42.1	64.0	64.0	67.0	56.4	73.8	40.6						
	85	70.7	70.7	71.2	69.3	77.6	54.6	67.5	67.5	67.6	67.6	73.2	53.1						
	90	74.3	74.3	74.4	74.4	77.3	67.2	70.8	70.8	70.9	70.9	72.5	66.5						
2750	75	65.1	65.1	72.2	47.3	79.7	30.0	62.1	62.1	68.2	45.8	75.1	28.5						
	80	68.8	68.8	71.7	61.0	82.1	45.5	65.7	65.7	67.8	59.5	74.5	42.2						
	85	72.5	72.5	72.6	72.6	78.5	57.5	69.2	69.2	69.3	69.3	73.9	56.0						
	90	76.2	76.2	76.3	76.3	77.9	72.1	75.2	75.2	72.7	72.7	73.7	69.3						
3000	75	66.6	66.6	72.9	49.3	80.4	30.5	63.4	63.4	68.8	47.7	75.8	29.0						
	80	70.4	70.4	72.5	64.1	79.8	45.4	67.1	67.1	68.2	63.3	75.1	43.9						
	85	74.2	74.2	74.2	74.2	79.1	60.3	70.7	70.7	70.8	70.8	74.5	58.8						
	90	77.9	77.9	78.0	78.0	79.0	74.8	74.1	74.1	74.2	74.2	74.3	74.3						

**Notes:**

1. All capacities shown are gross and have not considered indoor fan heat. To obtain net cooling, subtract indoor fan heat.
2. MBH = Total Gross Capacity, SHC = Sensible Heat Capacity



**Performance Data**

**Table 17. Gross cooling capacities (kW) TWA0764\*D condensing unit with TWE0764\*B air handler (SI)**

Airflow m <sup>3</sup> /hr	Ent DB (°C)	Ambient Temperature (°C)						Ambient Temperature (°C)						Ambient Temperature (°C)					
		30						35						40					
		Entering Wet Bulb (°C)						Entering Wet Bulb (°C)						Entering Wet Bulb (°C)					
		16		19		22		16		19		22		16		19		22	
		kW	SHC	kW	SHC	kW	SHC	kW	SHC	kW	SHC	kW	SHC	kW	SHC	kW	SHC	kW	SHC
3823	24	22.0	18.0	24.5	13.9	26.2	9.7	20.3	17.6	22.6	13.5	25.2	9.3	19.4	17.2	21.7	13.1	24.0	8.9
	27	21.3	21.3	23.4	17.2	26.1	13.0	20.6	20.6	22.5	16.8	25.0	12.6	19.8	19.8	21.5	16.4	23.9	12.2
	30	23.3	23.3	23.4	20.5	25.9	16.4	21.7	21.7	22.4	20.1	24.8	15.9	20.9	20.9	21.4	19.7	23.7	15.6
	33	23.6	23.6	23.6	23.6	25.8	19.7	22.8	22.8	22.8	22.8	25.6	20.0	22.0	22.0	22.0	22.0	23.5	18.9
4248	24	21.6	19.0	24.0	14.5	26.6	9.9	20.7	18.6	23.0	14.1	25.6	9.5	19.8	18.2	22.0	13.7	24.4	9.1
	27	22.0	22.0	23.8	18.2	26.5	13.6	21.3	21.3	22.9	17.8	25.4	13.2	20.5	20.5	21.8	17.4	24.2	12.8
	30	23.2	23.2	23.8	21.8	26.3	17.2	22.4	22.4	22.9	21.5	25.1	16.8	21.6	21.6	21.9	21.1	24.0	16.4
	33	24.4	24.4	24.5	24.5	26.2	20.9	23.6	23.6	23.6	23.6	25.0	20.5	22.7	22.7	22.7	22.7	23.9	20.1
4672	24	21.9	20.1	24.4	15.1	27.0	10.0	21.0	19.9	23.3	14.7	25.9	9.6	20.1	19.2	23.1	14.8	24.6	9.2
	27	22.6	22.6	24.2	19.1	26.8	14.1	22.7	22.7	23.2	18.7	25.7	13.7	21.1	21.1	22.1	18.3	24.4	13.3
	30	23.9	23.9	24.3	23.1	26.6	18.1	23.1	23.1	23.3	22.8	25.4	17.7	22.2	22.2	22.3	21.9	24.3	17.3
	33	25.1	25.1	25.2	25.2	26.5	22.1	24.3	24.3	25.2	25.2	25.4	21.7	23.3	23.3	23.4	23.4	24.2	21.3
5097	24	22.2	21.2	24.6	15.7	27.3	10.2	21.3	20.6	23.6	15.3	26.1	9.8	20.4	20.4	22.5	14.9	24.9	9.4
	27	23.2	23.2	24.5	20.0	27.1	14.6	22.4	22.4	23.5	19.6	25.9	14.2	21.5	21.5	23.2	19.9	24.7	13.7
	30	24.5	24.5	24.7	24.4	26.9	18.9	23.6	23.6	23.7	23.5	25.7	18.5	22.7	22.7	22.7	22.7	24.5	18.1
	33	25.8	25.8	25.8	25.8	26.8	23.3	24.8	24.8	24.9	24.9	25.6	22.9	23.9	23.9	23.9	23.9	24.3	22.7
Airflow m <sup>3</sup> /hr	Ent DB (°C)	Ambient Temperature (°C)						Ambient Temperature (°C)											
		45						52											
		Entering Wet Bulb (°C)						Entering Wet Bulb (°C)											
		16		19		22		16		19		22							
		kW	SHC	kW	SHC	kW	SHC	kW	SHC	kW	SHC	kW	SHC						
3823	24	18.5	16.8	20.6	12.7	22.8	8.5	17.5	16.3	19.5	12.3	21.6	8.1						
	27	19.0	19.0	20.4	16.0	22.6	11.8	18.2	18.2	19.3	15.6	21.4	11.4						
	30	20.1	20.1	20.4	19.3	22.5	15.1	19.2	19.2	19.4	18.8	22.0	15.3						
	33	21.1	21.1	21.1	21.1	22.3	18.5	20.1	20.1	20.2	20.2	21.1	18.0						
4248	24	19.5	18.5	20.9	13.3	23.1	8.6	17.9	17.2	19.8	12.9	21.9	8.2						
	27	19.7	19.7	20.8	17.0	22.9	12.3	18.8	18.8	19.6	16.5	21.6	11.9						
	30	20.7	20.7	20.9	20.3	22.8	16.0	19.8	19.8	19.8	19.8	21.5	15.6						
	33	21.8	21.8	21.8	21.8	22.7	19.7	20.8	20.8	20.8	20.8	21.3	19.5						
4672	24	19.1	19.1	21.1	13.9	23.4	8.8	18.2	18.2	20.0	13.4	22.0	8.3						
	27	20.2	20.2	21.0	17.9	24.1	13.3	19.2	19.2	19.9	17.4	21.8	12.4						
	30	21.2	21.2	21.3	21.3	23.0	16.8	20.3	20.3	20.3	20.3	21.7	16.4						
	33	22.3	22.3	22.4	22.4	22.8	21.1	22.1	22.1	21.3	21.3	21.6	20.3						
5097	24	19.5	19.5	21.4	14.4	23.6	8.9	18.6	18.6	20.2	14.0	22.2	8.5						
	27	20.6	20.6	21.3	18.8	23.4	13.3	19.7	19.7	20.0	18.5	22.0	12.9						
	30	21.7	21.7	21.8	21.8	23.2	17.7	20.7	20.7	20.7	20.7	21.8	17.2						
	33	22.8	22.8	22.9	22.9	23.2	21.9	21.7	21.7	21.7	21.7	21.8	21.8						

**Notes:**

1. All capacities shown are gross and have not considered indoor fan heat. To obtain net cooling, subtract indoor fan heat.
2. kW = Total Gross Capacity, SHC = Sensible Heat Capacity



**Table 18. Gross cooling capacities (MBH) TWA1014\*A condensing unit with TWE1014\*A air handler (IP)**

CFM	Ent DB (°F)	Ambient Temperature (°F)						Ambient Temperature (°F)						Ambient Temperature (°F)					
		85						95						105					
		Entering Wet Bulb (°F)						Entering Wet Bulb (°F)						Entering Wet Bulb (°F)					
		61		67		73		61		67		73		61		67		73	
		MBH	SHC	MBH	SHC	MBH	SHC	MBH	SHC	MBH	SHC	MBH	SHC	MBH	SHC	MBH	SHC	MBH	SHC
3025	75	98.6	84.4	109.4	64.9	121.1	44.7	94.5	82.5	104.7	63.0	115.7	42.8	90.1	80.4	99.7	61.0	110.0	40.8
	80	99.7	99.7	109.1	80.7	120.7	60.7	96.2	96.2	104.4	78.8	115.3	58.8	92.5	92.5	99.4	76.8	109.7	56.8
	85	105.1	105.1	109.3	96.5	120.4	76.6	101.5	101.5	104.6	94.6	115.0	74.7	97.5	97.5	99.7	92.5	109.3	72.7
	90	110.6	110.6	110.8	110.8	120.1	92.5	106.8	106.8	107.0	107.0	114.8	90.6	102.6	102.6	102.8	102.8	109.2	88.5
3350	75	100.5	89.3	111.1	67.7	122.8	45.5	96.3	87.3	106.3	65.8	117.3	43.6	91.7	85.3	101.1	63.8	111.4	41.6
	80	103.0	103.0	110.8	85.2	122.4	63.2	99.3	99.3	106.0	83.3	116.9	61.2	95.3	95.3	100.9	81.2	111.0	59.2
	85	108.7	108.7	111.3	102.7	122.1	80.8	104.8	104.8	106.6	100.8	116.5	78.8	100.6	100.6	101.6	98.7	110.7	76.8
	90	114.4	114.4	114.6	114.6	122.0	98.3	110.3	110.3	110.5	110.5	116.5	96.3	105.9	105.9	106.0	106.0	110.7	94.3
3675	75	102.1	94.1	112.6	70.5	124.2	46.3	97.8	92.2	107.6	68.6	118.5	44.3	93.2	90.1	102.3	66.6	112.6	42.3
	80	105.9	105.9	112.4	89.6	123.8	65.6	102.0	102.0	107.4	87.7	118.2	63.6	97.8	97.8	102.2	85.6	112.2	61.6
	85	111.8	111.8	113.2	108.8	123.5	84.8	107.7	107.7	108.4	106.9	117.8	82.9	103.2	103.2	103.5	103.5	111.9	80.9
	90	117.7	117.7	117.9	117.9	123.6	103.9	113.3	113.3	113.5	113.5	118.0	102.0	108.7	108.7	108.8	108.8	112.1	99.9
4000	75	103.6	98.8	113.8	73.3	125.4	47.0	98.6	98.6	108.7	71.3	119.6	45.1	94.5	94.5	103.2	69.3	113.5	43.0
	80	108.4	108.4	113.7	93.9	125.0	68.0	104.4	104.4	108.7	91.9	119.2	66.0	100.0	100.0	103.3	89.9	113.1	64.0
	85	114.5	114.5	115.0	114.9	124.7	88.8	110.2	110.2	110.3	110.3	118.9	86.9	105.6	105.6	105.7	105.7	112.9	84.8
	90	120.6	120.6	120.7	120.7	125.0	109.5	116.0	116.0	116.2	116.2	119.3	107.5	111.1	111.1	111.2	111.2	113.3	105.4
CFM	Ent DB (°F)	Ambient Temperature (°F)						Ambient Temperature (°F)											
		115						125											
		Entering Wet Bulb (°F)						Entering Wet Bulb (°F)											
		61		67		73		61		67		73							
		MBH	SHC	MBH	SHC	MBH	SHC	MBH	SHC	MBH	SHC	MBH	SHC						
3025	75	85.4	78.3	94.3	58.8	104.0	38.7	80.2	76.0	88.4	56.6	97.4	36.5						
	80	88.3	88.3	94.0	74.6	103.6	54.7	83.7	83.7	88.2	72.3	97.1	52.4						
	85	93.2	93.2	94.5	90.4	103.3	70.6	88.4	88.4	88.9	88.2	96.7	68.3						
	90	98.1	98.1	98.2	98.2	103.2	86.4	93.0	93.0	93.2	93.2	96.7	84.1						
3350	75	86.9	83.1	95.5	61.7	105.2	39.5	81.4	81.4	89.5	59.4	98.5	37.2						
	80	91.0	91.0	95.4	79.1	104.8	57.1	86.2	86.2	89.4	76.7	98.1	54.9						
	85	96.0	96.0	96.4	96.4	104.5	74.7	90.9	90.9	91.1	91.1	97.8	72.5						
	90	101.1	101.1	101.2	101.2	104.6	92.1	95.7	95.7	95.8	95.8	98.1	89.8						
3675	75	88.1	88.1	96.6	64.4	106.2	40.2	83.3	83.3	90.4	62.1	99.4	37.9						
	80	93.3	93.3	96.6	83.4	105.8	59.5	88.2	88.2	90.5	81.0	99.0	57.2						
	85	98.5	98.5	98.6	98.6	105.6	78.8	93.1	93.1	93.2	93.2	98.8	76.4						
	90	103.6	103.6	103.7	103.7	105.9	97.7	98.0	98.0	98.2	98.2	99.3	95.5						
4000	75	89.9	89.9	97.5	67.1	107.1	40.9	85.0	85.0	91.2	64.8	100.1	38.6						
	80	95.2	95.2	97.6	87.6	106.7	61.8	90.0	90.0	91.5	85.3	99.8	59.6						
	85	100.6	100.6	100.7	100.7	106.5	82.6	95.0	95.0	95.1	95.1	99.6	80.2						
	90	105.8	105.8	106.0	106.0	107.1	103.3	100.1	100.1	100.2	100.2	100.6	100.6						

**Notes:**

- All capacities shown are gross and have not considered indoor fan heat. To obtain net cooling, subtract indoor fan heat.
- MBH = Total Gross Capacity, SHC = Sensible Heat Capacity



## Performance Data

**Table 19. Gross cooling capacities (kW) TWA1014\*A condensing unit with TWE1014\*A air handler (SI)**

Airflow m <sup>3</sup> /hr	Ent DB (°C)	Ambient Temperature (°C)						Ambient Temperature (°C)						Ambient Temperature (°C)					
		30						35						40					
		Entering Wet Bulb (°C)						Entering Wet Bulb (°C)						Entering Wet Bulb (°C)					
		16		19		22		16		19		22		16		19		22	
		kW	SHC	kW	SHC	kW	SHC	kW	SHC	kW	SHC	kW	SHC	kW	SHC	kW	SHC	kW	SHC
5148	24	28.9	24.7	32.1	19.0	35.5	13.1	27.7	24.2	30.7	18.5	33.9	12.5	26.4	23.6	29.2	17.9	32.3	12.0
	27	29.2	29.2	32.0	23.6	35.4	17.8	28.2	28.2	30.6	23.1	33.8	17.2	27.1	27.1	29.1	22.5	32.1	16.6
	30	30.8	30.8	32.0	28.3	35.3	22.4	29.7	29.7	30.7	27.7	33.7	21.9	28.6	28.6	29.2	27.1	32.0	21.3
	33	32.4	32.4	32.5	32.5	35.2	27.1	31.3	31.3	31.3	31.3	33.6	26.5	30.1	30.1	30.1	30.1	32.0	25.9
5692	24	29.5	26.2	32.6	19.9	36.0	13.3	28.2	25.6	31.1	19.3	34.4	12.8	26.9	25.0	29.6	18.7	32.7	12.2
	27	30.2	30.2	32.5	25.0	35.9	18.5	29.1	29.1	31.1	24.4	34.3	17.9	27.9	27.9	29.6	23.8	32.5	17.4
	30	31.8	31.8	32.6	30.1	35.8	23.7	30.7	30.7	31.2	29.5	34.2	23.1	29.5	29.5	29.8	28.9	32.4	22.5
	33	33.5	33.5	33.6	33.6	35.7	28.8	32.3	32.3	32.4	32.4	34.1	28.2	31.0	31.0	31.1	31.1	32.5	27.6
6252	24	29.9	27.6	33.0	20.7	36.4	13.6	28.7	27.0	31.5	20.1	34.7	13.0	27.3	26.4	30.0	19.5	33.0	12.4
	27	31.0	31.0	32.9	26.3	36.3	19.2	29.9	29.9	31.5	25.7	34.6	18.7	28.7	28.7	29.9	25.1	32.9	18.1
	30	32.8	32.8	33.2	31.9	36.2	24.9	31.6	31.6	31.8	31.3	34.5	24.3	30.3	30.3	30.3	30.3	32.8	23.7
	33	34.5	34.5	34.5	34.5	36.2	30.5	33.2	33.2	33.3	33.3	34.6	29.9	31.8	31.8	31.9	31.9	32.9	29.3
6796	24	30.4	29.0	33.3	21.5	36.8	13.8	28.9	28.9	31.8	20.9	35.0	13.2	27.7	27.7	30.3	20.3	33.3	12.6
	27	31.8	31.8	33.3	27.5	36.6	19.9	30.6	30.6	31.8	26.9	34.9	19.3	29.3	29.3	30.3	26.3	33.2	18.7
	30	33.6	33.6	33.7	33.7	36.6	26.0	32.3	32.3	32.3	32.3	34.9	25.5	30.9	30.9	31.0	31.0	33.1	24.9
	33	35.3	35.3	35.4	35.4	36.6	32.1	34.0	34.0	34.0	34.0	35.0	31.5	32.6	32.6	32.6	32.6	33.2	30.9
Airflow m <sup>3</sup> /hr	Ent DB (°C)	Ambient Temperature (°C)						Ambient Temperature (°C)											
		45						52											
		Entering Wet Bulb (°C)						Entering Wet Bulb (°C)											
		16		19		22		16		19		22							
		kW	SHC	kW	SHC	kW	SHC	kW	SHC	kW	SHC	kW	SHC						
5148	24	25.0	22.9	27.6	17.2	30.5	11.4	23.5	22.3	25.9	16.6	28.6	10.7						
	27	25.9	25.9	27.6	21.9	30.4	16.0	24.5	24.5	25.8	21.2	28.4	15.4						
	30	27.3	27.3	27.7	26.5	30.3	20.7	25.9	25.9	26.0	25.8	28.3	20.0						
	33	28.7	28.7	28.8	28.8	30.2	25.3	27.3	27.3	27.3	27.3	28.3	24.7						
5692	24	25.5	24.4	28.0	18.1	30.8	11.6	23.8	23.8	26.2	17.4	28.9	10.9						
	27	26.7	26.7	28.0	23.2	30.7	16.7	25.2	25.2	26.2	22.5	28.8	16.1						
	30	28.1	28.1	28.2	28.2	30.6	21.9	26.7	26.7	26.7	26.7	28.7	21.2						
	33	29.6	29.6	29.7	29.7	30.7	27.0	28.0	28.0	28.1	28.1	28.7	26.3						
6252	24	25.8	25.8	28.3	18.9	31.1	11.8	24.4	24.4	26.5	18.2	29.1	11.1						
	27	27.3	27.3	28.3	24.4	31.0	17.4	25.9	25.9	26.5	23.7	29.0	16.8						
	30	28.9	28.9	28.9	28.9	30.9	23.1	27.3	27.3	27.3	27.3	28.9	22.4						
	33	30.4	30.4	30.4	30.4	31.0	28.6	28.7	28.7	28.8	28.8	29.1	28.0						
6796	24	26.4	26.4	28.6	19.7	31.4	12.0	24.9	24.9	26.7	19.0	29.3	11.3						
	27	27.9	27.9	28.6	25.7	31.3	18.1	26.4	26.4	26.8	25.0	29.2	17.5						
	30	29.5	29.5	29.5	29.5	31.2	24.2	27.8	27.8	27.9	27.9	29.2	23.5						
	33	31.0	31.0	31.1	31.1	31.4	30.3	29.3	29.3	29.4	29.4	29.5	29.5						

**Notes:**

1. All capacities shown are gross and have not considered indoor fan heat. To obtain net cooling, subtract indoor fan heat.
2. kW = Total Gross Capacity, SHC = Sensible Heat Capacity

**Table 20. Gross cooling capacities (MBH) TWA1014\*D condensing unit with TWE1014\*B air handler (IP)**

CFM	Ent DB (°F)	Ambient Temperature (°F)						Ambient Temperature (°F)						Ambient Temperature (°F)					
		85						95						105					
		Entering Wet Bulb (°F)						Entering Wet Bulb (°F)						Entering Wet Bulb (°F)					
		61		67		73		61		67		73		61		67		73	
		MBH	SHC	MBH	SHC	MBH	SHC	MBH	SHC	MBH	SHC	MBH	SHC	MBH	SHC	MBH	SHC	MBH	SHC
3025	75	95.8	83.2	106.0	63.5	117.0	43.3	91.1	81.0	100.7	61.4	111.1	41.2	86.2	78.8	95.3	59.2	105.1	39.1
	80	97.5	97.5	105.8	79.4	116.8	59.3	93.4	93.4	100.5	77.3	110.8	57.2	89.2	89.2	95.1	75.1	104.9	55.1
	85	102.8	102.8	106.2	95.3	116.5	75.3	98.6	98.6	100.9	93.2	110.6	73.2	94.3	94.3	95.7	91.1	104.7	71.1
	90	108.2	108.2	108.4	108.4	116.5	91.3	103.8	103.8	104.0	104.0	110.6	89.2	99.3	99.3	99.5	99.5	104.7	87.1
3350	75	97.6	88.1	107.6	66.4	118.6	44.0	92.7	85.9	102.1	64.2	112.5	41.9	87.6	83.8	96.5	62.1	106.4	39.8
	80	100.6	100.6	107.5	83.9	118.3	61.8	96.3	96.3	102.0	81.8	112.2	59.6	91.9	91.9	96.5	79.6	106.2	57.6
	85	106.1	106.1	108.1	101.6	118.1	79.4	101.7	101.7	102.8	99.5	112.0	77.3	97.1	97.1	97.6	96.2	105.9	75.2
	90	111.7	111.7	111.9	111.9	118.2	97.0	107.1	107.1	107.2	107.2	112.2	94.9	102.3	102.3	102.5	102.5	106.2	92.8
3675	75	99.1	92.9	108.9	69.2	119.9	44.8	94.1	90.6	103.3	67.0	113.6	42.7	88.9	88.9	97.6	64.8	107.4	40.6
	80	103.3	103.3	108.9	88.4	119.6	64.2	98.8	98.8	103.3	86.2	113.4	62.0	94.2	94.2	97.7	84.0	107.2	60.0
	85	109.0	109.0	109.9	107.7	119.4	83.5	104.3	104.3	104.8	103.7	113.1	81.4	99.6	99.6	99.7	99.7	107.0	79.3
	90	114.8	114.8	115.0	115.0	119.7	102.7	109.9	109.9	110.1	110.1	113.5	100.6	105.0	105.0	105.1	105.1	107.5	98.5
4000	75	100.5	97.4	110.0	71.9	120.9	45.5	95.4	95.4	104.3	69.7	114.6	43.4	90.8	90.8	98.5	67.5	108.3	41.3
	80	105.7	105.7	110.1	92.7	120.7	66.5	101.0	101.0	104.4	90.5	114.3	64.4	96.3	96.3	98.8	88.3	108.0	62.3
	85	111.6	111.6	111.9	111.5	120.5	87.5	106.7	106.7	106.8	106.8	114.2	85.3	101.8	101.8	101.9	101.9	107.9	83.2
	90	117.5	117.5	117.6	117.6	121.0	108.3	112.4	112.4	112.5	112.5	114.8	106.2	107.2	107.2	107.4	107.4	108.5	103.9
CFM	Ent DB (°F)	Ambient Temperature (°F)						Ambient Temperature (°F)											
		115						125											
		Entering Wet Bulb (°F)						Entering Wet Bulb (°F)											
		61		67		73		61		67		73							
		MBH	SHC	MBH	SHC	MBH	SHC	MBH	SHC	MBH	SHC	MBH	SHC						
3025	75	80.9	76.4	89.5	57.0	98.9	36.9	75.2	73.0	83.0	54.5	92.0	34.6						
	80	84.7	84.7	89.4	72.9	98.7	53.0	79.5	79.5	83.0	70.4	91.7	50.6						
	85	89.6	89.6	90.2	88.6	98.5	69.0	84.3	84.3	84.5	84.5	91.5	66.7						
	90	94.5	94.5	94.7	94.7	98.6	84.9	89.1	89.1	89.2	89.2	91.8	82.6						
3350	75	82.1	82.1	90.6	59.8	100.0	37.7	76.9	76.9	84.1	57.3	92.9	35.3						
	80	87.2	87.2	90.7	77.3	99.8	55.4	81.8	81.8	84.2	74.8	92.7	53.1						
	85	92.2	92.2	92.4	92.4	99.6	73.1	86.7	86.7	86.9	86.9	92.6	70.7						
	90	97.3	97.3	97.5	97.5	100.0	90.7	91.6	91.6	91.7	91.7	93.0	88.3						
3675	75	84.1	84.1	91.6	62.5	100.9	38.4	78.7	78.7	84.9	60.1	93.7	36.1						
	80	89.3	89.3	91.8	81.7	100.7	57.8	83.8	83.8	85.3	79.2	93.5	55.5						
	85	94.5	94.5	94.7	94.7	100.6	77.1	88.8	88.8	88.9	88.9	93.5	74.7						
	90	99.7	99.7	99.8	99.8	101.0	96.3	93.8	93.8	93.9	93.9	94.0	94.0						
4000	75	85.8	85.8	92.4	65.2	101.7	39.1	80.3	80.3	85.6	62.7	94.4	36.7						
	80	91.2	91.2	92.8	86.0	101.5	60.1	85.5	85.5	86.2	83.0	94.2	57.8						
	85	96.5	96.5	96.6	96.6	101.4	81.0	90.6	90.6	90.7	90.7	94.2	78.6						
	90	101.8	101.8	101.9	101.9	102.0	102.0	95.7	95.7	95.8	95.8	95.9	95.9						

**Notes:**

- All capacities shown are gross and have not considered indoor fan heat. To obtain net cooling, subtract indoor fan heat.
- MBH = Total Gross Capacity, SHC = Sensible Heat Capacity



**Performance Data**

**Table 21. Gross cooling capacities (kW) TWA1014\*D condensing unit with TWE1014\*B air handler (SI)**

Airflow m <sup>3</sup> /hr	Ent DB (°C)	Ambient Temperature (°C)						Ambient Temperature (°C)						Ambient Temperature (°C)					
		30						35						40					
		Entering Wet Bulb (°C)						Entering Wet Bulb (°C)						Entering Wet Bulb (°C)					
		16		19		22		16		19		22		16		19		22	
		kW	SHC	kW	SHC	kW	SHC	kW	SHC	kW	SHC	kW	SHC	kW	SHC	kW	SHC	kW	SHC
5148	24	28.1	24.4	31.1	18.6	34.3	12.7	26.7	23.7	29.5	18.0	32.5	12.1	25.3	23.1	27.9	17.4	30.8	11.5
	27	28.6	28.6	31.0	23.3	34.2	17.4	27.4	27.4	29.5	22.7	32.5	16.8	26.1	26.1	27.9	22.0	30.7	16.2
	30	30.1	30.1	31.1	27.9	34.2	22.1	28.9	28.9	29.6	27.3	32.4	21.4	27.6	27.6	28.0	26.7	30.7	20.8
	33	31.7	31.7	31.8	31.8	34.1	26.7	30.4	30.4	30.5	30.5	32.4	26.1	29.1	29.1	29.2	29.2	30.7	25.5
5692	24	28.6	25.8	31.5	19.5	34.8	12.9	27.2	25.2	29.9	18.8	33.0	12.3	25.7	24.6	28.3	18.2	31.2	11.7
	27	29.5	29.5	31.5	24.6	34.7	18.1	28.2	28.2	29.9	24.0	32.9	17.5	26.9	26.9	28.3	23.3	31.1	16.9
	30	31.1	31.1	31.7	29.8	34.6	23.3	29.8	29.8	30.1	29.1	32.8	22.7	28.5	28.5	28.6	28.2	31.1	22.1
	33	32.7	32.7	32.8	32.8	34.6	28.4	31.4	31.4	31.4	31.4	32.9	27.8	30.0	30.0	30.0	30.0	31.1	27.2
6252	24	29.1	27.2	31.9	20.3	35.1	13.1	27.6	26.6	30.3	19.6	33.3	12.5	26.1	26.1	28.6	19.0	31.5	11.9
	27	30.3	30.3	31.9	25.9	35.1	18.8	29.0	29.0	30.3	25.3	33.2	18.2	27.6	27.6	28.6	24.6	31.4	17.6
	30	32.0	32.0	32.2	31.6	35.0	24.5	30.6	30.6	30.7	30.4	33.2	23.8	29.2	29.2	29.2	29.2	31.4	23.2
	33	33.6	33.6	33.7	33.7	35.1	30.1	32.2	32.2	32.3	32.3	33.3	29.5	30.8	30.8	30.8	30.8	31.5	28.9
6796	24	29.4	28.5	32.2	21.1	35.4	13.3	27.9	27.9	30.6	20.4	33.6	12.7	26.6	26.6	28.9	19.8	31.7	12.1
	27	31.0	31.0	32.3	27.2	35.4	19.5	29.6	29.6	30.6	26.5	33.5	18.9	28.2	28.2	28.9	25.9	31.7	18.3
	30	32.7	32.7	32.8	32.7	35.3	25.6	31.3	31.3	31.3	31.3	33.5	25.0	29.8	29.8	29.9	29.9	31.6	24.4
	33	34.4	34.4	34.5	34.5	35.5	31.7	32.9	32.9	33.0	33.0	33.6	31.1	31.4	31.4	31.5	31.5	31.8	30.4
Airflow m <sup>3</sup> /hr	Ent DB (°C)	Ambient Temperature (°C)						Ambient Temperature (°C)											
		45						52											
		Entering Wet Bulb (°C)						Entering Wet Bulb (°C)											
		16		19		22		16		19		22							
		kW	SHC	kW	SHC	kW	SHC	kW	SHC	kW	SHC	kW	SHC						
5148	24	23.7	22.4	26.2	16.7	29.0	10.8	22.0	21.4	24.3	16.0	27.0	10.1						
	27	24.8	24.8	26.2	21.4	28.9	15.5	23.3	23.3	24.3	20.6	26.9	14.8						
	30	26.3	26.3	26.4	26.0	28.9	20.2	24.7	24.7	24.8	24.8	26.8	19.5						
	33	27.7	27.7	27.7	27.7	28.9	24.9	26.1	26.1	26.1	26.1	26.9	24.2						
5692	24	24.1	24.1	26.6	17.5	29.3	11.0	22.5	22.5	24.6	16.8	27.2	10.4						
	27	25.5	25.5	26.6	22.7	29.2	16.2	24.0	24.0	24.7	21.9	27.2	15.6						
	30	27.0	27.0	27.1	27.1	29.2	21.4	25.4	25.4	25.5	25.5	27.1	20.7						
	33	28.5	28.5	28.6	28.6	29.3	26.6	26.9	26.9	26.9	26.9	27.2	25.9						
6252	24	24.6	24.6	26.8	18.3	29.6	11.3	23.1	23.1	24.9	17.6	27.5	10.6						
	27	26.2	26.2	26.9	23.9	29.5	16.9	24.6	24.6	25.0	23.2	27.4	16.3						
	30	27.7	27.7	27.7	27.7	29.5	22.6	26.0	26.0	26.1	26.1	27.4	21.9						
	33	29.2	29.2	29.3	29.3	29.6	28.2	27.5	27.5	27.5	27.5	27.6	27.6						
6796	24	25.2	25.2	27.1	19.1	29.8	11.5	23.5	23.5	25.1	18.4	27.7	10.8						
	27	26.7	26.7	27.2	25.2	29.7	17.6	25.1	25.1	25.3	24.3	27.6	16.9						
	30	28.3	28.3	28.3	28.3	29.7	23.7	26.6	26.6	26.6	26.6	27.6	23.0						
	33	29.8	29.8	29.9	29.9	29.9	29.9	28.0	28.0	28.1	28.1	28.1	28.1						

**Notes:**

1. All capacities shown are gross and have not considered indoor fan heat. To obtain net cooling, subtract indoor fan heat.
2. kW = Total Gross Capacity, SHC = Sensible Heat Capacity

**Table 22. Gross cooling capacities (MBH) TWA1564\*D condensing unit with TWE1564\*B air handler (IP)**

CFM	Ent DB (°F)	Ambient Temperature (°F)						Ambient Temperature (°F)						Ambient Temperature (°F)					
		85						95						105					
		Entering Wet Bulb (°F)						Entering Wet Bulb (°F)						Entering Wet Bulb (°F)					
		61		67		73		61		67		73		61		67		73	
		MBH	SHC	MBH	SHC	MBH	SHC	MBH	SHC	MBH	SHC	MBH	SHC	MBH	SHC	MBH	SHC	MBH	SHC
4500	75	146.8	127.5	163.9	97.9	182.5	67.4	141.1	124.9	157.7	95.4	175.6	65.0	135.0	122.2	150.9	92.7	168.1	62.3
	80	146.8	146.8	163.9	122.4	182.5	92.1	141.1	141.1	157.6	119.9	175.6	89.7	135.0	135.0	150.9	117.2	168.0	87.1
	85	146.8	146.8	163.9	146.8	182.4	116.8	141.1	141.1	157.7	144.2	175.5	114.3	135.0	135.0	150.9	141.5	168.0	111.7
	90	146.8	146.8	164.0	164.0	182.4	141.3	141.1	141.1	157.7	157.7	175.5	138.9	135.0	135.0	150.9	150.9	168.0	136.2
5000	75	149.2	135.2	166.4	102.4	185.1	68.7	143.4	132.6	160.0	99.9	178.0	66.2	137.0	129.8	153.0	97.2	170.3	63.6
	80	149.2	149.2	166.4	129.6	185.1	96.1	143.4	143.4	160.0	127.0	178.0	93.6	137.0	137.0	153.0	124.3	170.2	90.9
	85	149.2	149.2	166.4	156.5	185.1	123.3	143.3	143.3	160.0	153.9	178.0	120.9	137.0	137.0	153.0	151.2	170.2	118.2
	90	149.2	149.2	166.5	166.5	185.0	150.5	143.4	143.4	160.0	160.0	178.0	148.0	137.0	137.0	153.0	153.0	170.2	145.4
5500	75	151.2	142.7	168.5	106.9	187.3	69.9	145.2	140.1	161.9	104.3	180.0	67.4	138.7	137.3	154.8	101.6	172.1	64.7
	80	151.2	151.2	168.5	136.6	187.2	99.9	145.2	145.2	161.9	134.0	180.0	97.4	138.7	138.7	154.8	131.2	172.1	94.7
	85	151.2	151.2	168.5	166.0	187.2	129.8	145.2	145.2	161.9	161.9	179.9	127.3	138.7	138.7	154.8	154.8	172.1	124.7
	90	151.2	151.2	168.5	168.5	187.2	159.5	145.2	145.2	161.9	161.9	180.0	157.0	138.7	138.7	154.8	154.8	172.1	154.4
6000	75	152.9	150.1	170.3	111.2	189.1	71.0	146.7	146.5	163.5	108.6	181.7	68.6	140.1	140.1	156.3	105.9	173.7	65.9
	80	152.9	152.9	170.3	143.4	189.0	103.7	146.7	146.7	163.5	140.9	181.6	101.2	140.1	140.1	156.3	138.1	173.6	98.5
	85	152.8	152.8	170.3	170.3	189.0	136.2	146.7	146.7	163.5	163.5	181.6	133.7	140.1	140.1	156.3	156.3	173.6	131.0
	90	152.8	152.8	170.2	170.2	189.0	168.4	146.7	146.7	163.5	163.5	181.6	165.9	140.1	140.1	156.2	156.2	173.6	163.2
CFM	Ent DB (°F)	Ambient Temperature (°F)						Ambient Temperature (°F)											
		115						125											
		Entering Wet Bulb (°F)						Entering Wet Bulb (°F)											
		61		67		73		61		67		73							
		MBH	SHC	MBH	SHC	MBH	SHC	MBH	SHC	MBH	SHC	MBH	SHC						
4500	75	128.5	119.3	143.7	89.9	160.1	59.6	121.7	116.3	136.1	87.0	151.6	56.6						
	80	128.6	128.6	143.7	114.4	160.1	84.3	121.7	121.7	136.1	111.4	151.5	81.4						
	85	128.5	128.5	143.7	138.7	160.1	108.9	121.7	121.7	136.1	134.8	151.5	106.0						
	90	128.5	128.5	143.8	143.8	160.1	133.5	121.7	121.7	136.1	136.1	151.5	130.5						
5000	75	130.4	126.9	145.6	94.4	162.1	60.8	123.4	122.6	137.8	91.4	153.4	57.8						
	80	130.4	130.4	145.7	121.5	162.1	88.2	123.4	123.4	137.8	118.4	153.3	85.2						
	85	130.4	130.4	145.7	145.7	162.1	115.4	123.4	123.4	137.8	137.8	153.3	112.5						
	90	130.4	130.4	145.7	145.7	162.1	142.6	123.4	123.4	137.8	137.8	153.3	139.6						
5500	75	131.9	131.9	147.2	98.7	163.8	61.9	124.7	124.7	139.2	95.7	154.9	59.0						
	80	131.9	131.9	147.2	128.4	163.7	92.0	124.7	124.7	139.2	125.3	154.8	89.0						
	85	131.9	131.9	147.3	147.3	163.7	121.9	124.7	124.7	139.2	139.2	154.8	118.9						
	90	131.9	131.9	147.2	147.2	163.7	151.5	124.7	124.7	139.2	139.2	154.8	148.6						
6000	75	133.2	133.2	148.6	103.0	165.2	63.1	125.9	125.9	140.4	100.0	156.1	60.1						
	80	133.2	133.2	148.6	135.2	165.1	95.7	125.9	125.9	140.4	132.2	156.0	92.7						
	85	133.2	133.2	148.6	148.6	165.1	128.2	125.9	125.9	140.4	140.4	156.0	125.2						
	90	133.2	133.2	148.6	148.6	165.1	160.4	125.8	125.8	140.4	140.4	156.0	155.2						

**Notes:**

- All capacities shown are gross and have not considered indoor fan heat. To obtain net cooling, subtract indoor fan heat.
- MBH = Total Gross Capacity, SHC = Sensible Heat Capacity



## Performance Data

**Table 23. Gross cooling capacities (kW) TWA1564\*D heat pump with TWE1564\*B air handler (SI)**

Airflow m <sup>3</sup> /hr	Ent DB (°C)	Ambient Temperature (°C)						Ambient Temperature (°C)						Ambient Temperature (°C)					
		30						35						40					
		Entering Wet Bulb (°C)						Entering Wet Bulb (°C)						Entering Wet Bulb (°C)					
		16		19		22		16		19		22		16		19		22	
		kW	SHC	kW	SHC	kW	SHC	kW	SHC	kW	SHC	kW	SHC	kW	SHC	kW	SHC	kW	SHC
7646	24	43.1	37.5	48.2	28.8	53.6	19.8	41.5	36.8	46.3	28.1	51.5	19.1	39.6	35.9	44.3	27.3	49.3	18.3
	27	43.1	43.1	48.1	36.0	53.6	27.1	41.5	41.5	46.3	35.3	51.5	26.3	39.6	39.6	44.3	34.5	49.3	25.6
	30	43.1	43.1	48.2	43.2	53.6	34.3	41.5	41.5	46.3	42.4	51.5	33.6	39.6	39.6	44.3	41.6	49.3	32.8
	33	43.1	43.1	48.2	48.2	53.5	41.6	41.5	41.5	46.3	46.3	51.5	40.8	39.6	39.6	44.3	44.3	49.3	40.1
8495	24	43.8	39.8	48.9	30.1	54.3	20.2	42.1	39.0	47.0	29.4	52.2	19.4	40.2	38.2	44.9	28.6	49.9	18.6
	27	43.8	43.8	48.9	38.1	54.3	28.2	42.1	42.1	47.0	37.4	52.2	27.5	40.2	40.2	44.9	36.6	49.9	26.7
	30	43.8	43.8	48.9	46.1	54.3	36.3	42.1	42.1	47.0	45.3	52.2	35.5	40.2	40.2	44.9	44.4	49.9	34.8
	33	43.8	43.8	48.9	48.9	54.3	44.3	42.1	42.1	47.0	47.0	52.2	43.5	40.2	40.2	44.9	44.9	49.9	42.7
9345	24	44.4	42.0	49.5	31.4	55.0	20.5	42.6	41.2	47.5	30.7	52.8	19.8	40.7	40.3	45.4	29.9	50.5	19.0
	27	44.4	44.4	49.5	40.2	54.9	29.4	42.6	42.6	47.5	39.4	52.8	28.6	40.7	40.7	45.4	38.6	50.4	27.8
	30	44.4	44.4	49.5	48.9	54.9	38.2	42.6	42.6	47.5	47.5	52.8	37.4	40.7	40.7	45.4	45.4	50.4	36.6
	33	44.4	44.4	49.5	49.5	54.9	46.9	42.6	42.6	47.5	47.5	52.8	46.2	40.7	40.7	45.4	45.4	50.4	45.4
10194	24	44.9	44.2	50.0	32.7	55.5	20.9	43.1	43.1	48.0	31.9	53.3	20.1	41.1	41.1	45.8	31.1	50.9	19.3
	27	44.9	44.9	50.0	42.2	55.5	30.5	43.1	43.1	48.0	41.4	53.3	29.7	41.1	41.1	45.8	40.6	50.9	28.9
	30	44.9	44.9	50.0	50.0	55.5	40.0	43.1	43.1	48.0	48.0	53.2	39.3	41.1	41.1	45.8	45.8	50.9	38.5
	33	44.9	44.9	50.0	50.0	55.5	49.6	43.1	43.1	48.0	48.0	53.2	48.8	41.1	41.1	45.8	45.8	50.9	48.0
Airflow m <sup>3</sup> /hr	Ent DB (°C)	Ambient Temperature (°C)						Ambient Temperature (°C)											
		45						52											
		Entering Wet Bulb (°C)						Entering Wet Bulb (°C)											
		16		19		22		16		19		22							
		kW	SHC	kW	SHC	kW	SHC	kW	SHC	kW	SHC	kW	SHC	kW	SHC	kW	SHC	kW	SHC
7646	24	37.7	35.1	42.2	26.4	46.9	17.5	35.7	34.2	39.9	25.6	44.4	16.6						
	27	37.7	37.7	42.2	33.7	46.9	24.8	35.7	35.7	39.9	32.8	44.4	23.9						
	30	37.7	37.7	42.2	40.8	46.9	32.0	35.7	35.7	39.9	39.6	44.4	31.2						
	33	37.7	37.7	42.2	42.2	46.9	39.2	35.7	35.7	39.9	39.9	44.4	38.4						
8495	24	38.3	37.3	42.7	27.7	47.5	17.8	36.2	36.0	40.4	26.9	44.9	17.0						
	27	38.3	38.3	42.7	35.7	47.5	25.9	36.2	36.2	40.4	34.8	44.9	25.0						
	30	38.3	38.3	42.7	42.7	47.5	33.9	36.2	36.2	40.4	40.4	44.9	33.1						
	33	38.3	38.3	42.7	42.7	47.5	41.9	36.2	36.2	40.4	40.4	44.9	41.1						
9345	24	38.7	38.7	43.2	29.0	48.0	18.2	36.6	36.6	40.8	28.1	45.4	17.3						
	27	38.7	38.7	43.2	37.8	48.0	27.0	36.6	36.6	40.8	36.9	45.3	26.1						
	30	38.7	38.7	43.2	43.2	48.0	35.8	36.6	36.6	40.8	40.8	45.3	35.0						
	33	38.7	38.7	43.2	43.2	48.0	44.6	36.6	36.6	40.8	40.8	45.3	43.7						
10194	24	39.1	39.1	43.6	30.3	48.4	18.5	36.9	36.9	41.2	29.4	45.7	17.6						
	27	39.1	39.1	43.6	39.8	48.4	28.1	36.9	36.9	41.2	38.9	45.7	27.2						
	30	39.1	39.1	43.6	43.6	48.4	37.7	36.9	36.9	41.2	41.2	45.7	36.8						
	33	39.1	39.1	43.6	43.6	48.4	47.2	36.9	36.9	41.2	41.2	45.7	45.5						

**Notes:**

1. All capacities shown are gross and have not considered indoor fan heat. To obtain net cooling, subtract indoor fan heat.
2. kW = Total Gross Capacity, SHC = Sensible Heat Capacity

**Table 24. Gross cooling capacities (MBH) TWA2014\*D heat pump with TWE2014\*B air handler (IP)**

CFM	Ent DB (°F)	Ambient Temperature (°F)						Ambient Temperature (°F)						Ambient Temperature (°F)					
		85						95						105					
		Entering Wet Bulb (°F)						Entering Wet Bulb (°F)						Entering Wet Bulb (°F)					
		61		67		73		61		67		73		61		67		73	
		MBH	SHC	MBH	SHC	MBH	SHC	MBH	SHC	MBH	SHC	MBH	SHC	MBH	SHC	MBH	SHC	MBH	SHC
6000	75	201.8	168.5	224.9	131.1	250.0	92.3	195.2	165.3	217.5	128.1	241.7	89.3	187.5	161.8	208.9	124.6	232.2	85.8
	80	202.0	198.8	224.9	162.2	249.9	123.5	195.3	195.0	217.5	159.1	241.6	120.5	187.7	187.7	209.0	155.5	232.1	117.1
	85	202.1	202.1	225.2	192.6	250.0	154.7	195.4	195.4	217.7	189.5	241.7	151.7	187.8	187.8	209.2	185.9	232.2	148.3
	90	202.2	202.2	225.3	223.0	250.0	185.7	195.5	195.5	217.9	217.9	241.8	182.6	187.8	187.8	209.3	209.3	232.3	179.1
6680	75	205.4	177.5	228.6	136.6	253.8	93.9	198.4	174.4	220.9	133.5	245.3	90.8	190.6	170.8	212.1	130.0	235.5	87.4
	80	205.5	205.5	228.7	170.6	253.7	128.2	198.6	198.6	221.0	167.4	245.2	125.2	190.7	190.7	212.2	163.8	235.4	121.7
	85	205.6	205.6	228.9	204.0	253.8	162.5	198.7	198.7	221.2	200.9	245.2	159.4	190.8	190.8	212.4	197.3	235.5	156.0
	90	205.7	205.7	229.0	229.0	253.9	196.4	198.7	198.7	221.3	221.3	245.3	193.3	190.9	190.9	212.5	212.5	235.6	189.8
7350	75	208.3	186.3	231.7	141.8	257.0	95.4	201.2	183.1	223.8	138.7	248.2	92.3	193.1	179.5	214.7	135.1	238.2	88.8
	80	208.4	208.4	231.8	178.7	256.9	132.8	201.3	201.3	223.9	175.5	248.1	129.7	193.3	193.3	214.9	171.9	238.1	126.2
	85	208.5	208.5	232.0	215.1	257.0	170.1	201.4	201.4	224.1	211.9	248.2	167.0	193.3	193.3	215.1	208.3	238.2	163.5
	90	208.6	208.6	232.1	232.1	257.1	206.8	201.5	201.5	224.2	224.2	248.3	203.7	193.4	193.4	215.2	215.2	238.3	200.1
8030	75	210.8	194.8	234.3	146.9	259.7	96.8	203.5	191.6	226.2	143.7	250.7	93.7	195.3	187.9	217.0	140.2	240.5	90.2
	80	211.0	211.0	234.4	186.5	259.6	137.2	203.7	203.7	226.4	183.3	250.6	134.1	195.4	195.4	217.2	179.7	240.4	130.6
	85	211.0	211.0	234.6	225.9	259.7	177.5	203.8	203.8	226.6	222.7	250.7	174.4	195.5	195.5	217.3	217.3	240.5	170.9
	90	211.1	211.1	234.7	234.7	259.9	217.0	203.8	203.8	226.6	226.6	250.9	213.8	195.5	195.5	217.4	217.4	240.7	210.2
CFM	Ent DB (°F)	Ambient Temperature (°F)						Ambient Temperature (°F)											
		115						125											
		Entering Wet Bulb (°F)						Entering Wet Bulb (°F)											
		61		67		73		61		67		73							
		MBH	SHC	MBH	SHC	MBH	SHC	MBH	SHC	MBH	SHC	MBH	SHC						
6000	75	179.2	157.9	199.7	120.9	221.8	82.2	170.0	153.8	189.4	116.8	210.2	78.1						
	80	179.3	179.3	199.8	151.8	221.8	113.4	170.2	170.2	189.5	147.6	210.2	109.3						
	85	179.4	179.4	200.0	182.1	221.8	144.6	170.3	170.3	189.7	178.0	210.3	140.5						
	90	179.5	179.5	200.1	200.1	221.9	175.3	170.3	170.3	189.8	189.8	210.4	171.2						
6680	75	181.9	166.9	202.6	126.2	224.8	83.6	172.5	162.6	192.0	122.1	212.9	79.5						
	80	182.1	182.1	202.7	160.0	224.7	118.0	172.7	172.7	192.2	155.8	212.8	113.9						
	85	182.2	182.2	202.9	193.4	224.8	152.3	172.7	172.7	192.3	189.2	212.9	148.2						
	90	182.2	182.2	203.0	203.0	224.9	185.9	172.8	172.8	192.4	192.4	213.1	181.7						
7350	75	184.3	175.5	205.0	131.3	227.2	85.1	174.6	171.2	194.2	127.2	215.0	80.9						
	80	184.4	184.4	205.1	168.0	227.1	122.5	174.7	174.7	194.3	163.7	214.9	118.3						
	85	184.5	184.5	205.3	204.4	227.3	159.8	174.8	174.8	194.5	194.5	215.1	155.7						
	90	184.5	184.5	205.4	205.4	227.4	196.3	174.8	174.8	194.6	194.6	215.3	192.0						
8030	75	186.2	183.9	207.0	136.3	229.3	86.4	176.4	176.4	196.0	132.2	216.9	82.3						
	80	186.4	186.4	207.2	175.8	229.2	126.8	176.5	176.5	196.2	171.5	216.8	122.6						
	85	186.4	186.4	207.4	207.4	229.4	167.1	176.6	176.6	196.3	196.3	217.0	163.0						
	90	186.5	186.5	207.4	207.4	229.5	206.3	176.6	176.6	196.4	196.4	217.1	202.1						

**Notes:**

1. All capacities shown are gross and have not considered indoor fan heat. To obtain net cooling, subtract indoor fan heat.
2. MBH = Total Gross Capacity, SHC = Sensible Heat Capacity



## Performance Data

**Table 25. Gross cooling capacities (kW) TWA2014\*D heat pump with TWE2014\*B air handler (SI)**

Airflow m <sup>3</sup> /hr	Ent DB (°C)	Ambient Temperature (°C)						Ambient Temperature (°C)						Ambient Temperature (°C)					
		30						35						40					
		Entering Wet Bulb (°C)						Entering Wet Bulb (°C)						Entering Wet Bulb (°C)					
		16		19		22		16		19		22		16		19		22	
		kW	SHC	kW	SHC	kW	SHC	kW	SHC	kW	SHC	kW	SHC	kW	SHC	kW	SHC	kW	SHC
10194	24	59.2	49.5	65.9	38.5	73.2	27.0	57.2	48.6	63.6	37.6	70.6	26.1	54.9	47.5	61.1	36.5	67.8	25.1
	27	59.3	58.5	65.9	47.6	73.1	36.2	57.2	57.2	63.7	46.7	70.6	35.3	54.9	54.9	61.1	45.6	67.7	34.3
	30	59.3	59.3	66.0	56.6	73.2	45.4	57.3	57.3	63.7	55.7	70.6	44.5	54.9	54.9	61.2	54.6	67.8	43.4
	33	59.3	59.3	66.0	65.6	73.2	54.5	57.3	57.3	63.8	63.8	70.7	53.6	55.0	55.0	61.2	61.2	67.8	52.5
11349	24	60.2	52.2	67.0	40.1	74.3	27.5	58.1	51.2	64.6	39.1	71.6	26.5	55.7	50.1	62.0	38.1	68.7	25.5
	27	60.3	60.3	67.0	50.1	74.2	37.6	58.2	58.2	64.7	49.1	71.6	36.7	55.8	55.8	62.0	48.1	68.7	35.6
	30	60.3	60.3	67.0	60.0	74.2	47.7	58.2	58.2	64.7	59.0	71.6	46.8	55.8	55.8	62.1	57.9	68.7	45.7
	33	60.3	60.3	67.1	67.1	74.3	57.7	58.2	58.2	64.8	64.8	71.6	56.7	55.8	55.8	62.1	62.1	68.7	55.7
12488	24	61.1	54.8	67.9	41.6	75.2	27.9	58.9	53.8	65.5	40.7	72.5	27.0	56.5	52.7	62.7	39.6	69.4	25.9
	27	61.1	61.1	67.9	52.5	75.1	38.9	59.0	59.0	65.5	51.5	72.4	38.0	56.5	56.5	62.8	50.4	69.4	36.9
	30	61.1	61.1	67.9	63.2	75.2	49.9	59.0	59.0	65.5	62.2	72.5	49.0	56.5	56.5	62.8	61.2	69.5	47.9
	33	61.2	61.2	68.0	68.0	75.2	60.7	59.0	59.0	65.6	65.6	72.5	59.8	56.5	56.5	62.9	62.9	69.5	58.7
13643	24	61.8	57.3	68.6	43.1	75.9	28.3	59.6	56.3	66.2	42.2	73.2	27.4	57.1	55.2	63.4	41.1	70.1	26.3
	27	61.8	61.8	68.7	54.8	75.9	40.2	59.6	59.6	66.2	53.8	73.1	39.3	57.1	57.1	63.4	52.7	70.1	38.2
	30	61.9	61.9	68.7	66.4	75.9	52.1	59.7	59.7	66.2	65.4	73.2	51.1	57.2	57.2	63.5	63.5	70.1	50.1
	33	61.9	61.9	68.7	68.7	76.0	63.7	59.7	59.7	66.3	66.3	73.2	62.8	57.2	57.2	63.5	63.5	70.2	61.7
Airflow m <sup>3</sup> /hr	Ent DB (°C)	Ambient Temperature (°C)						Ambient Temperature (°C)											
		45						52											
		Entering Wet Bulb (°C)						Entering Wet Bulb (°C)											
		16		19		22		16		19		22							
		kW	SHC	kW	SHC	kW	SHC	kW	SHC	kW	SHC	kW	SHC						
10194	24	52.4	46.4	58.3	35.4	64.6	24.0	49.7	45.1	55.2	34.2	61.2	22.7						
	27	52.4	52.4	58.3	44.5	64.6	33.2	49.7	49.7	55.3	43.3	61.2	32.0						
	30	52.5	52.5	58.4	53.5	64.6	42.3	49.8	49.8	55.3	52.2	61.2	41.1						
	33	52.5	52.5	58.4	58.4	64.7	51.4	49.8	49.8	55.4	55.4	61.2	50.2						
11349	24	53.2	49.0	59.1	37.0	65.5	24.4	50.4	47.7	56.0	35.7	61.9	23.2						
	27	53.2	53.2	59.2	46.9	65.4	34.5	50.4	50.4	56.0	45.7	61.9	33.3						
	30	53.3	53.3	59.2	56.8	65.5	44.6	50.5	50.5	56.1	55.5	61.9	43.4						
	33	53.3	53.3	59.2	59.2	65.5	54.5	50.5	50.5	56.1	56.1	62.0	53.3						
12488	24	53.9	51.5	59.8	38.5	66.2	24.8	51.0	50.3	56.6	37.2	62.5	23.6						
	27	53.9	53.9	59.9	49.3	66.1	35.8	51.0	51.0	56.6	48.0	62.5	34.6						
	30	53.9	53.9	59.9	59.9	66.2	46.8	51.0	51.0	56.7	56.7	62.5	45.6						
	33	53.9	53.9	59.9	59.9	66.2	57.6	51.1	51.1	56.7	56.7	62.6	56.3						
13643	24	54.4	54.0	60.4	39.9	66.7	25.2	51.5	51.5	57.1	38.7	63.0	23.9						
	27	54.5	54.5	60.4	51.6	66.7	37.1	51.5	51.5	57.2	50.3	63.0	35.8						
	30	54.5	54.5	60.5	60.5	66.8	49.0	51.5	51.5	57.2	57.2	63.1	47.7						
	33	54.5	54.5	60.5	60.5	66.8	60.5	51.5	51.5	57.2	57.2	63.1	59.2						

**Notes:**

1. All capacities shown are gross and have not considered indoor fan heat. To obtain net cooling, subtract indoor fan heat.
2. kW = Total Gross Capacity, SHC = Sensible Heat Capacity



**Table 26. Gross cooling capacities (MBH) TWA0604\*A condensing unit only (IP)**

Outdoor Temp (°F)		Suction Temperature (°F)					
		30	35	40	45	50	55
65	Head Press (psig)	246.0	251.5	257.4	263.6	270.3	277.2
	Capacity (Btuh/1000)	56.9	62.7	68.9	75.5	82.6	90.0
	Unit Power (kW)	3.4	3.5	3.5	3.6	3.7	3.8
75	Head Press (psig)	283.6	289.5	295.7	302.3	309.3	316.5
	Capacity (Btuh/1000)	54.0	59.5	65.4	71.7	78.4	85.5
	Unit Power (kW)	3.8	3.8	3.9	4.0	4.0	4.1
85	Head Press (psig)	324.9	331.1	337.7	344.6	351.8	359.4
	Capacity (Btuh/1000)	50.8	56.1	61.7	67.7	74.1	80.8
	Unit Power (kW)	4.2	4.2	4.3	4.4	4.4	4.5
95	Head Press (psig)	369.8	376.4	383.3	390.5	398.0	405.9
	Capacity (Btuh/1000)	47.4	52.4	57.8	63.5	69.6	75.9
	Unit Power (kW)	4.6	4.7	4.7	4.8	4.9	5.0
105	Head Press (psig)	418.6	425.5	432.7	440.3	448.1	456.2
	Capacity (Btuh/1000)	43.7	48.5	53.6	59.1	64.8	70.9
	Unit Power (kW)	5.1	5.2	5.2	5.3	5.4	5.5
115	Head Press (psig)	471.6	478.8	486.3	494.0	502.0	510.2
	Capacity (Btuh/1000)	39.8	44.4	49.3	54.5	59.9	65.6
	Unit Power (kW)	5.7	5.7	5.8	5.9	6.0	6.1
125	Head Press (psig)	529.0	536.3	543.8	551.5	559.4	567.4
	Capacity (Btuh/1000)	35.7	40.1	44.7	49.6	54.8	60.2
	Unit Power (kW)	6.3	6.3	6.4	6.5	6.6	6.7

**Note:** Performance data calculated at 15°F subcooling and 15°F superheat and does not include capacity loss due to refrigerant lines.

**Table 27. Gross cooling capacities (kW) TWA0604\*A condensing unit only (SI)**

Outdoor Temp (°C)		Suction Temperature (°C)					
		-1.1	1.7	4.4	7.2	10	12.8
18.3	Head Press (kPa)	1695.8	1734.1	1774.7	1817.8	1863.5	1911.3
	Capacity (kW)	16.7	18.4	20.2	22.1	24.2	26.4
	Unit Power (kW)	3.4	3.5	3.5	3.6	3.7	3.8
23.9	Head Press (kPa)	1955.5	1996.1	2039.1	2084.5	2132.2	2182.3
	Capacity (kW)	15.8	17.4	19.2	21.0	23.0	25.0
	Unit Power (kW)	3.8	3.8	3.9	4.0	4.0	4.1
29.4	Head Press (kPa)	2239.8	2282.8	2328.2	2375.6	2425.5	2478.0
	Capacity (kW)	14.9	16.4	18.1	19.8	21.7	23.7
	Unit Power (kW)	4.2	4.2	4.3	4.4	4.4	4.5
35	Head Press (kPa)	2549.8	2595.0	2642.6	2692.3	2744.2	2798.6
	Capacity (kW)	13.9	15.4	16.9	18.6	20.4	22.3
	Unit Power (kW)	4.6	4.7	4.7	4.8	4.9	5.0
40.6	Head Press (kPa)	2886.5	2933.8	2983.6	3035.5	3089.3	3145.4
	Capacity (kW)	12.8	14.2	15.7	17.3	19.0	20.8
	Unit Power (kW)	5.1	5.2	5.2	5.3	5.4	5.5
46.1	Head Press (kPa)	3251.7	3301.3	3352.8	3406.1	3461.3	3517.8
	Capacity (kW)	11.7	13.0	14.4	16.0	17.6	19.2
	Unit Power (kW)	5.7	5.7	5.8	5.9	6.0	6.1
51.7	Head Press (kPa)	3647.1	3697.4	3749.1	3802.6	3857.1	3912.2
	Capacity (kW)	10.5	11.8	13.1	14.5	16.0	17.6
	Unit Power (kW)	6.3	6.3	6.4	6.5	6.6	6.7

**Note:** Performance data calculated at 8.3°C subcooling and 8.3°C superheat and does not include capacity loss due to refrigerant lines.



## Performance Data

**Table 28. Gross cooling capacities (kW) TWA0604\*D condensing unit only (IP)**

Outdoor Temp (°F)		Suction Temperature (°F)					
		30	35	40	45	50	55
65	Head Press (psig)	243.4	248.8	254.6	260.8	267.4	274.3
	Capacity (Btuh/1000)	52.2	57.8	63.8	70.2	77.1	84.4
	Unit Power (kW)	3.1	3.2	3.2	3.2	3.2	3.2
75	Head Press (psig)	280.2	285.9	292.0	298.4	305.2	312.4
	Capacity (Btuh/1000)	49.3	54.6	60.3	66.4	72.9	79.8
	Unit Power (kW)	3.5	3.5	3.6	3.6	3.6	3.7
85	Head Press (psig)	320.4	326.4	332.7	339.4	346.5	353.9
	Capacity (Btuh/1000)	46.1	51.2	56.6	62.3	68.4	74.8
	Unit Power (kW)	3.9	4.0	4.0	4.0	4.1	4.1
95	Head Press (psig)	364.1	370.4	377.0	383.9	391.1	398.7
	Capacity (Btuh/1000)	42.7	47.5	52.6	58.0	63.7	69.8
	Unit Power (kW)	4.4	4.5	4.5	4.5	4.6	4.6
105	Head Press (psig)	411.5	418.1	424.9	432.1	439.5	447.2
	Capacity (Btuh/1000)	39.0	43.6	48.4	53.6	59.0	64.6
	Unit Power (kW)	5.0	5.0	5.0	5.1	5.1	5.2
115	Head Press (psig)	463.1	469.9	476.9	484.2	491.7	499.4
	Capacity (Btuh/1000)	35.3	39.6	44.2	49.0	54.1	59.4
	Unit Power (kW)	5.6	5.6	5.7	5.7	5.7	5.8
125	Head Press (psig)	518.9	525.7	532.8	540.0	547.4	554.9
	Capacity (Btuh/1000)	31.5	35.6	39.9	44.4	49.1	54.0
	Unit Power (kW)	6.2	6.3	6.3	6.4	6.4	6.5

**Note:** Performance data calculated at 15°F subcooling and 15°F superheat and does not include capacity loss due to refrigerant lines.

**Table 29. Gross cooling capacities (kW) TWA0604\*D condensing unit only (SI)**

Outdoor Temp (°C)		Suction Temperature (°C)					
		-1.1	1.7	4.4	7.2	10	12.8
18.3	Head Press (kPa)	1678.2	1715.5	1755.4	1798.0	1843.4	1891.5
	Capacity (kW)	15.3	16.9	18.7	20.6	22.6	24.7
	Unit Power (kW)	3.1	3.2	3.2	3.2	3.2	3.2
23.9	Head Press (kPa)	1932.0	1971.4	2013.2	2057.5	2104.5	2154.2
	Capacity (kW)	14.5	16.0	17.7	19.5	21.4	23.4
	Unit Power (kW)	3.5	3.5	3.6	3.6	3.6	3.7
29.4	Head Press (kPa)	2208.9	2250.4	2294.1	2340.2	2388.8	2439.8
	Capacity (kW)	13.5	15.0	16.6	18.3	20.0	21.9
	Unit Power (kW)	3.9	4.0	4.0	4.0	4.1	4.1
35	Head Press (kPa)	2510.3	2553.8	2599.3	2646.9	2696.9	2749.0
	Capacity (kW)	12.5	13.9	15.4	17.0	18.7	20.5
	Unit Power (kW)	4.4	4.5	4.5	4.5	4.6	4.6
40.6	Head Press (kPa)	2837.5	2882.8	2929.8	2979.0	3030.2	3083.4
	Capacity (kW)	11.4	12.8	14.2	15.7	17.3	18.9
	Unit Power (kW)	5.0	5.0	5.0	5.1	5.1	5.2
46.1	Head Press (kPa)	3193.0	3239.7	3288.1	3338.2	3389.9	3443.2
	Capacity (kW)	10.3	11.6	13.0	14.4	15.9	17.4
	Unit Power (kW)	5.6	5.6	5.7	5.7	5.7	5.8
51.7	Head Press (kPa)	3577.7	3624.8	3673.3	3723.0	3774.0	3825.9
	Capacity (kW)	9.2	10.4	11.7	13.0	14.4	15.8
	Unit Power (kW)	6.2	6.3	6.3	6.4	6.4	6.5

**Note:** Performance data calculated at 8.3°C subcooling and 8.3°C superheat and does not include capacity loss due to refrigerant lines.

**Table 30. Gross cooling capacities (MBH) TWA0764\*A condensing unit only (IP)**

Outdoor Temp (°F)		Suction Temperature (°F)					
		30	35	40	45	50	55
65	Head Press (psig)	249.7	255.6	262.0	268.8	276.2	284.0
	Capacity (Btuh/1000)	63.0	69.3	76.0	83.2	90.9	99.0
	Unit Power (kW)	4.0	4.0	4.1	4.2	4.3	4.4
75	Head Press (psig)	287.9	294.1	300.8	307.9	315.5	323.6
	Capacity (Btuh/1000)	60.3	66.2	72.6	79.4	86.6	94.2
	Unit Power (kW)	4.4	4.4	4.5	4.6	4.7	4.8
85	Head Press (psig)	329.1	335.7	342.6	350.0	357.9	366.3
	Capacity (Btuh/1000)	56.9	62.5	68.5	74.9	81.7	88.8
	Unit Power (kW)	4.8	4.9	4.9	5.0	5.1	5.2
95	Head Press (psig)	373.8	380.6	387.8	395.5	403.6	412.3
	Capacity (Btuh/1000)	53.0	58.4	64.0	70.0	76.3	83.0
	Unit Power (kW)	5.3	5.3	5.4	5.5	5.6	5.7
105	Head Press (psig)	422.2	429.3	436.8	444.7	453.1	461.9
	Capacity (Btuh/1000)	49.0	54.0	59.3	64.9	70.9	77.1
	Unit Power (kW)	5.8	5.9	6.0	6.1	6.2	6.3
115	Head Press (psig)	475.0	482.2	489.9	497.9	506.4	515.3
	Capacity (Btuh/1000)	44.9	49.6	54.6	59.8	65.3	71.1
	Unit Power (kW)	6.4	6.5	6.6	6.7	6.8	6.9
125	Head Press (psig)	532.2	539.4	547.1	555.1	563.5	572.3
	Capacity (Btuh/1000)	40.9	45.2	49.8	54.6	59.7	65.0
	Unit Power (kW)	7.1	7.2	7.3	7.4	7.5	7.6

**Note:** Performance data calculated at 15°F subcooling and 15°F superheat and does not include capacity loss due to refrigerant lines.

**Table 31. Gross cooling capacities (kW) TWA0764\*A condensing unit only (SI)**

Outdoor Temp (°C)		Suction Temperature (°C)					
		-1.1	1.7	4.4	7.2	10	12.8
18.3	Head Press (kPa)	1721.6	1762.4	1806.3	1853.5	1904.0	1958.2
	Capacity (kW)	18.5	20.3	22.3	24.4	26.6	29.0
	Unit Power (kW)	4.0	4.0	4.1	4.2	4.3	4.4
23.9	Head Press (kPa)	1984.9	2027.9	2073.9	2123.0	2175.5	2231.5
	Capacity (kW)	17.7	19.4	21.3	23.3	25.4	27.6
	Unit Power (kW)	4.4	4.4	4.5	4.6	4.7	4.8
29.4	Head Press (kPa)	2269.3	2314.4	2362.4	2413.5	2467.9	2525.7
	Capacity (kW)	16.7	18.3	20.1	22.0	23.9	26.0
	Unit Power (kW)	4.8	4.9	4.9	5.0	5.1	5.2
35	Head Press (kPa)	2577.3	2624.2	2674.1	2726.9	2783.0	2842.4
	Capacity (kW)	15.5	17.1	18.8	20.5	22.4	24.3
	Unit Power (kW)	5.3	5.3	5.4	5.5	5.6	5.7
40.6	Head Press (kPa)	2911.1	2959.8	3011.5	3066.1	3123.8	3184.7
	Capacity (kW)	14.4	15.8	17.4	19.0	20.8	22.6
	Unit Power (kW)	5.8	5.9	6.0	6.1	6.2	6.3
46.1	Head Press (kPa)	3274.7	3324.7	3377.6	3433.2	3491.6	3553.1
	Capacity (kW)	13.2	14.5	16.0	17.5	19.1	20.8
	Unit Power (kW)	6.4	6.5	6.6	6.7	6.8	6.9
51.7	Head Press (kPa)	3669.1	3719.4	3772.1	3827.4	3885.4	3945.8
	Capacity (kW)	12.0	13.2	14.6	16.0	17.5	19.1
	Unit Power (kW)	7.1	7.2	7.3	7.4	7.5	7.6

**Note:** Performance data calculated at 8.3°C subcooling and 8.3°C superheat and does not include capacity loss due to refrigerant lines.



## Performance Data

**Table 32. Gross cooling capacities (MBH) TWA0764\*D condensing unit only (IP)**

Outdoor Temp (°F)		Suction Temperature (°F)					
		30	35	40	45	50	55
65	Head Press (psig)	250.9	257.3	264.0	271.0	278.3	286.0
	Capacity (Btuh/1000)	64.7	71.9	79.5	87.5	95.9	104.5
	Unit Power (kW)	3.8	3.8	3.9	3.9	4.0	4.0
75	Head Press (psig)	287.9	294.6	301.6	308.8	316.3	324.5
	Capacity (Btuh/1000)	61.0	67.8	75.0	82.5	90.4	98.5
	Unit Power (kW)	4.2	4.3	4.3	4.4	4.4	4.5
85	Head Press (psig)	328.2	335.2	342.4	349.9	357.6	366.2
	Capacity (Btuh/1000)	57.0	63.4	70.2	77.4	84.7	92.3
	Unit Power (kW)	4.8	4.8	4.9	4.9	4.9	5.0
95	Head Press (psig)	372.0	379.2	386.7	394.4	402.2	411.2
	Capacity (Btuh/1000)	52.8	58.9	65.3	72.0	78.9	86.0
	Unit Power (kW)	5.4	5.4	5.5	5.5	5.5	5.6
105	Head Press (psig)	419.4	426.8	434.5	442.3	450.3	459.4
	Capacity (Btuh/1000)	48.4	54.1	60.2	66.5	73.0	79.7
	Unit Power (kW)	6.1	6.1	6.1	6.2	6.2	6.3
115	Head Press (psig)	470.7	478.3	486.0	493.9	501.9	510.7
	Capacity (Btuh/1000)	43.8	49.3	55.0	60.9	67.0	73.2
	Unit Power (kW)	6.9	6.9	6.9	7.0	7.0	7.0
125	Head Press (psig)	525.8	533.3	540.9	548.6	556.3	564.1
	Capacity (Btuh/1000)	39.2	44.3	49.6	55.2	60.8	66.5
	Unit Power (kW)	7.8	7.8	7.9	7.9	7.9	7.9

**Note:** Performance data calculated at 15°F subcooling and 15°F superheat and does not include capacity loss due to refrigerant lines.

**Table 33. Gross cooling capacities (kW) TWA0764\*D condensing unit only (SI)**

Outdoor Temp (°C)		Suction Temperature (°C)					
		-1.1	1.7	4.4	7.2	10	12.8
18.3	Head Press (kPa)	1729.6	1773.8	1820.3	1868.6	1918.6	1972.0
	Capacity (kW)	19.0	21.1	23.3	25.6	28.1	30.6
	Unit Power (kW)	3.8	3.8	3.9	3.9	4.0	4.0
23.9	Head Press (kPa)	1984.8	2031.0	2079.2	2129.2	2180.8	2237.4
	Capacity (kW)	17.9	19.9	22.0	24.2	26.5	28.9
	Unit Power (kW)	4.2	4.3	4.3	4.4	4.4	4.5
29.4	Head Press (kPa)	2262.7	2310.9	2360.9	2412.6	2465.5	2524.7
	Capacity (kW)	16.7	18.6	20.6	22.7	24.8	27.1
	Unit Power (kW)	4.8	4.8	4.9	4.9	4.9	5.0
35	Head Press (kPa)	2564.7	2614.6	2666.1	2719.0	2773.0	2834.8
	Capacity (kW)	15.5	17.3	19.1	21.1	23.1	25.2
	Unit Power (kW)	5.4	5.4	5.5	5.5	5.5	5.6
40.6	Head Press (kPa)	2891.6	2942.8	2995.7	3049.9	3104.8	3167.5
	Capacity (kW)	14.2	15.9	17.6	19.5	21.4	23.3
	Unit Power (kW)	6.1	6.1	6.1	6.2	6.2	6.3
46.1	Head Press (kPa)	3245.2	3297.4	3351.1	3405.5	3460.2	3521.0
	Capacity (kW)	12.8	14.4	16.1	17.9	19.6	21.4
	Unit Power (kW)	6.9	6.9	6.9	7.0	7.0	7.0
51.7	Head Press (kPa)	3625.4	3677.1	3729.7	3782.7	3835.6	3889.1
	Capacity (kW)	11.5	13.0	14.5	16.2	17.8	19.5
	Unit Power (kW)	7.8	7.8	7.9	7.9	7.9	7.9

**Note:** Performance data calculated at 8.3°C subcooling and 8.3°C superheat and does not include capacity loss due to refrigerant lines.

**Table 34. Gross cooling capacities (MBH) TWA1014\*A condensing unit only (IP)**

Outdoor Temp (°F)		Suction Temperature (°F)					
		30	35	40	45	50	55
65	Head Press (psig)	260.5	266.2	271.8	277.6	283.3	288.9
	Capacity (Btuh/1000)	86.3	95.0	104.4	114.4	124.9	135.9
	Unit Power (kW)	5.4	5.5	5.5	5.6	5.7	5.7
75	Head Press (psig)	298.8	304.6	310.4	316.3	322.0	327.6
	Capacity (Btuh/1000)	81.8	90.1	99.0	108.5	118.4	128.7
	Unit Power (kW)	5.9	6.0	6.1	6.2	6.2	6.3
85	Head Press (psig)	340.8	346.8	352.7	358.7	364.4	369.9
	Capacity (Btuh/1000)	77.2	85.1	93.5	102.4	111.7	121.4
	Unit Power (kW)	6.6	6.6	6.7	6.8	6.8	6.9
95	Head Press (psig)	386.6	392.7	398.8	404.7	410.4	415.9
	Capacity (Btuh/1000)	72.2	79.7	87.6	96.0	104.8	113.9
	Unit Power (kW)	7.2	7.3	7.4	7.4	7.5	7.6
105	Head Press (psig)	436.5	442.7	448.8	454.7	460.3	465.5
	Capacity (Btuh/1000)	66.9	74.0	81.5	89.4	97.6	106.1
	Unit Power (kW)	8.0	8.0	8.1	8.2	8.3	8.3
115	Head Press (psig)	490.6	496.8	502.8	508.6	513.9	518.8
	Capacity (Btuh/1000)	61.3	68.0	75.0	82.4	90.1	98.0
	Unit Power (kW)	8.8	8.9	9.0	9.0	9.1	9.1
125	Head Press (psig)	549.0	555.0	560.7	566.0	570.9	575.1
	Capacity (Btuh/1000)	55.3	61.5	68.1	75.0	82.2	89.5
	Unit Power (kW)	9.7	9.8	9.9	9.9	10.0	10.0

**Note:** Performance data calculated at 15°F subcooling and 15°F superheat and does not include capacity loss due to refrigerant lines.

**Table 35. Gross cooling capacities (kW) TWA1014\*A condensing unit only (SI)**

Outdoor Temp (°C)		Suction Temperature (°C)					
		-1.1	1.7	4.4	7.2	10	12.8
18.3	Head Press (kPa)	1796.2	1835.1	1874.3	1913.9	1953.2	1991.6
	Capacity (kW)	25.3	27.9	30.6	33.5	36.6	39.8
	Unit Power (kW)	5.4	5.5	5.5	5.6	5.7	5.7
23.9	Head Press (kPa)	2060.3	2100.2	2140.4	2180.6	2220.3	2258.8
	Capacity (kW)	24.0	26.4	29.0	31.8	34.7	37.7
	Unit Power (kW)	5.9	6.0	6.1	6.2	6.2	6.3
29.4	Head Press (kPa)	2349.9	2390.9	2432.0	2472.8	2512.7	2550.7
	Capacity (kW)	22.6	24.9	27.4	30.0	32.7	35.6
	Unit Power (kW)	6.6	6.6	6.7	6.8	6.8	6.9
35	Head Press (kPa)	2665.8	2707.7	2749.5	2790.4	2829.9	2867.3
	Capacity (kW)	21.2	23.4	25.7	28.1	30.7	33.4
	Unit Power (kW)	7.2	7.3	7.4	7.4	7.5	7.6
40.6	Head Press (kPa)	3009.4	3052.2	3094.2	3135.0	3173.9	3209.8
	Capacity (kW)	19.6	21.7	23.9	26.2	28.6	31.1
	Unit Power (kW)	8.0	8.0	8.1	8.2	8.3	8.3
46.1	Head Press (kPa)	3382.9	3425.6	3467.0	3506.5	3543.4	3576.9
	Capacity (kW)	18.0	19.9	22.0	24.2	26.4	28.7
	Unit Power (kW)	8.8	8.9	9.0	9.0	9.1	9.1
51.7	Head Press (kPa)	3785.4	3826.7	3866.0	3902.7	3936.0	3965.1
	Capacity (kW)	16.2	18.0	20.0	22.0	24.1	26.2
	Unit Power (kW)	9.7	9.8	9.9	9.9	10.0	10.0

**Note:** Performance data calculated at 8.3°C subcooling and 8.3°C superheat and does not include capacity loss due to refrigerant lines.



## Performance Data

**Table 36. Gross cooling capacities (MBH) TWA1014\*D condensing unit only (IP)**

Outdoor Temp (°F)		Suction Temperature (°F)					
		30	35	40	45	50	55
65	Head Press (psig)	249.0	254.7	260.7	266.9	273.4	280.2
	Capacity (Btuh/1000)	86.6	95.3	104.5	114.2	124.4	135.0
	Unit Power (kW)	4.9	5.0	5.0	5.1	5.2	5.2
75	Head Press (psig)	285.4	291.2	297.3	303.8	310.5	317.4
	Capacity (Btuh/1000)	80.7	88.8	97.4	106.5	116.0	126.0
	Unit Power (kW)	5.5	5.5	5.6	5.7	5.7	5.8
85	Head Press (psig)	325.9	331.9	338.3	344.9	351.8	358.9
	Capacity (Btuh/1000)	75.3	83.0	91.0	99.6	108.6	118.0
	Unit Power (kW)	6.2	6.2	6.3	6.4	6.4	6.5
95	Head Press (psig)	370.2	376.5	383.2	390.1	397.2	404.6
	Capacity (Btuh/1000)	70.0	77.2	84.9	93.0	101.5	110.3
	Unit Power (kW)	7.0	7.0	7.1	7.2	7.2	7.3
105	Head Press (psig)	418.1	424.8	431.8	439.0	446.5	454.1
	Capacity (Btuh/1000)	64.2	71.2	78.5	86.3	94.4	102.8
	Unit Power (kW)	7.8	7.9	8.0	8.0	8.1	8.1
115	Head Press (psig)	469.3	476.4	483.8	491.4	499.2	507.0
	Capacity (Btuh/1000)	57.7	64.5	71.6	79.1	86.8	94.8
	Unit Power (kW)	8.7	8.8	8.9	8.9	9.0	9.0
125	Head Press (psig)	523.4	530.9	538.7	546.6	554.6	562.6
	Capacity (Btuh/1000)	50.3	56.9	63.9	71.1	78.5	86.2
	Unit Power (kW)	9.6	9.7	9.8	9.9	9.9	10.0

**Note:** Performance data calculated at 15°F subcooling and 15°F superheat and does not include capacity loss due to refrigerant lines.

**Table 37. Gross cooling capacities (kW) TWA1014\*D condensing unit only (SI)**

Outdoor Temp (°C)		Suction Temperature (°C)					
		-1.1	1.7	4.4	7.2	10	12.8
18.3	Head Press (kPa)	1716.9	1756.1	1797.2	1840.2	1885.3	1932.2
	Capacity (kW)	25.4	27.9	30.6	33.5	36.5	39.6
	Unit Power (kW)	4.9	5.0	5.0	5.1	5.2	5.2
23.9	Head Press (kPa)	1967.7	2007.8	2050.1	2094.4	2140.6	2188.6
	Capacity (kW)	23.6	26.0	28.5	31.2	34.0	36.9
	Unit Power (kW)	5.5	5.5	5.6	5.7	5.7	5.8
29.4	Head Press (kPa)	2246.7	2288.4	2332.2	2378.0	2425.6	2474.9
	Capacity (kW)	22.1	24.3	26.7	29.2	31.8	34.6
	Unit Power (kW)	6.2	6.2	6.3	6.4	6.4	6.5
35	Head Press (kPa)	2552.4	2596.2	2641.9	2689.4	2738.7	2789.3
	Capacity (kW)	20.5	22.6	24.9	27.3	29.7	32.3
	Unit Power (kW)	7.0	7.0	7.1	7.2	7.2	7.3
40.6	Head Press (kPa)	2882.4	2928.8	2976.9	3027.0	3078.3	3130.8
	Capacity (kW)	18.8	20.9	23.0	25.3	27.7	30.1
	Unit Power (kW)	7.8	7.9	8.0	8.0	8.1	8.1
46.1	Head Press (kPa)	3235.4	3284.8	3335.9	3388.3	3441.8	3495.9
	Capacity (kW)	16.9	18.9	21.0	23.2	25.4	27.8
	Unit Power (kW)	8.7	8.8	8.9	8.9	9.0	9.0
51.7	Head Press (kPa)	3608.4	3660.7	3714.2	3768.7	3823.8	3878.9
	Capacity (kW)	14.8	16.7	18.7	20.8	23.0	25.3
	Unit Power (kW)	9.6	9.7	9.8	9.9	9.9	10.0

**Note:** Performance data calculated at 8.3°C subcooling and 8.3°C superheat and does not include capacity loss due to refrigerant lines.

**Table 38. Gross cooling capacities (MBH) TWA1564\*D condensing unit only (IP)**

Outdoor Temp (°F)		Suction Temperature (°F)					
		30	35	40	45	50	55
65	Head Press (psig)	230.1	234.1	238.4	243.1	248.1	253.5
	Capacity (Btuh/1000)	137.9	151.4	166.0	181.6	198.4	216.3
	Unit Power (kW)	8.7	8.9	9.1	9.3	9.5	9.8
75	Head Press (psig)	266.3	270.7	275.4	280.5	285.8	291.5
	Capacity (Btuh/1000)	130.8	144.0	158.1	173.2	189.5	206.9
	Unit Power (kW)	9.5	9.7	9.9	10.1	10.3	10.6
85	Head Press (psig)	306.2	310.9	315.9	321.2	326.9	333.0
	Capacity (Btuh/1000)	123.1	135.8	149.4	164.0	179.6	196.4
	Unit Power (kW)	10.5	10.6	10.8	11.0	11.2	11.5
95	Head Press (psig)	349.8	354.8	360.0	365.6	371.6	378.0
	Capacity (Btuh/1000)	114.9	127.0	140.0	154.0	169.0	185.1
	Unit Power (kW)	11.5	11.7	11.8	12.0	12.2	12.5
105	Head Press (psig)	397.4	402.6	408.1	413.9	420.1	426.6
	Capacity (Btuh/1000)	106.3	117.8	130.2	143.5	157.8	173.1
	Unit Power (kW)	12.7	12.8	13.0	13.2	13.4	13.6
115	Head Press (psig)	449.3	454.6	460.3	466.2	472.6	479.3
	Capacity (Btuh/1000)	97.6	108.4	120.1	132.7	146.2	160.6
	Unit Power (kW)	14.0	14.2	14.4	14.5	14.7	15.0
125	Head Press (psig)	505.8	511.1	516.7	522.7	529.0	535.7
	Capacity (Btuh/1000)	88.7	98.9	109.8	121.5	134.2	147.7
	Unit Power (kW)	15.6	15.7	15.9	16.1	16.2	16.5

**Note:** Performance data calculated at 15°F subcooling and 15°F superheat and does not include capacity loss due to refrigerant lines.

**Table 39. Gross cooling capacities (kW) TWA1564\*D condensing unit only (SI)**

Outdoor Temp (°C)		Suction Temperature (°C)					
		-1.1	1.7	4.4	7.2	10	12.8
18.3	Head Press (kPa)	1586.2	1614.0	1644.1	1676.3	1710.8	1747.8
	Capacity (kW)	40.4	44.4	48.6	53.2	58.1	63.4
	Unit Power (kW)	8.7	8.9	9.1	9.3	9.5	9.8
23.9	Head Press (kPa)	1836.4	1866.7	1899.1	1933.7	1970.7	2010.2
	Capacity (kW)	38.3	42.2	46.3	50.8	55.5	60.6
	Unit Power (kW)	9.5	9.7	9.9	10.1	10.3	10.6
29.4	Head Press (kPa)	2111.2	2143.5	2178.0	2214.8	2254.0	2295.9
	Capacity (kW)	36.1	39.8	43.8	48.1	52.6	57.6
	Unit Power (kW)	10.5	10.6	10.8	11.0	11.2	11.5
35	Head Press (kPa)	2411.8	2445.9	2482.3	2521.0	2562.3	2606.0
	Capacity (kW)	33.7	37.2	41.0	45.1	49.5	54.2
	Unit Power (kW)	11.5	11.7	11.8	12.0	12.2	12.5
40.6	Head Press (kPa)	2740.0	2775.6	2813.4	2853.6	2896.4	2941.6
	Capacity (kW)	31.2	34.5	38.2	42.1	46.2	50.7
	Unit Power (kW)	12.7	12.8	13.0	13.2	13.4	13.6
46.1	Head Press (kPa)	3098.0	3134.5	3173.4	3214.6	3258.4	3304.9
	Capacity (kW)	28.6	31.8	35.2	38.9	42.8	47.1
	Unit Power (kW)	14.0	14.2	14.4	14.5	14.7	15.0
51.7	Head Press (kPa)	3487.4	3523.8	3562.5	3603.8	3647.4	3693.5
	Capacity (kW)	26.0	29.0	32.2	35.6	39.3	43.3
	Unit Power (kW)	15.6	15.7	15.9	16.1	16.2	16.5

**Note:** Performance data calculated at 8.3°C subcooling and 8.3°C superheat and does not include capacity loss due to refrigerant lines.



## Performance Data

**Table 40. Gross cooling capacities (MBH) TWA2014\*D condensing unit only (IP)**

Outdoor Temp (°F)		Suction Temperature (°F)					
		30	35	40	45	50	55
65	Head Press (psig)	252.9	259.0	265.6	272.5	279.9	287.8
	Capacity (Btuh/1000)	208.6	228.8	250.3	273.1	297.2	322.7
	Unit Power (kW)	12.6	12.8	13.1	13.4	13.7	14.1
75	Head Press (psig)	289.6	296.0	302.8	310.1	317.8	326.0
	Capacity (Btuh/1000)	197.9	217.5	238.3	260.3	283.5	307.9
	Unit Power (kW)	13.8	14.0	14.3	14.6	14.9	15.3
85	Head Press (psig)	329.5	336.2	343.3	350.8	358.8	367.3
	Capacity (Btuh/1000)	186.0	204.8	224.8	245.8	268.0	291.3
	Unit Power (kW)	15.1	15.4	15.6	15.9	16.2	16.6
95	Head Press (psig)	372.8	379.8	387.1	394.9	403.0	411.7
	Capacity (Btuh/1000)	173.0	190.9	210.0	230.0	251.1	273.1
	Unit Power (kW)	16.7	16.9	17.2	17.4	17.7	18.1
105	Head Press (psig)	419.7	426.8	434.3	442.2	450.6	459.3
	Capacity (Btuh/1000)	159.2	176.2	194.1	213.1	233.0	253.8
	Unit Power (kW)	18.5	18.7	18.9	19.2	19.4	19.8
115	Head Press (psig)	470.4	477.6	485.2	493.1	501.4	510.2
	Capacity (Btuh/1000)	144.7	160.7	177.6	195.4	214.0	233.4
	Unit Power (kW)	20.5	20.7	20.9	21.1	21.4	21.7
125	Head Press (psig)	524.9	531.9	539.3	547.1	555.1	563.6
	Capacity (Btuh/1000)	129.8	144.6	160.3	176.7	193.9	211.8
	Unit Power (kW)	22.7	22.9	23.1	23.3	23.6	23.8

**Note:** Performance data calculated at 15°F subcooling and 15°F superheat and does not include capacity loss due to refrigerant lines.

**Table 41. Gross cooling capacities (kW) TWA2014\*D condensing unit only (SI)**

Outdoor Temp (°C)		Suction Temperature (°C)					
		-1.1	1.7	4.4	7.2	10	12.8
18.3	Head Press (kPa)	1744.0	1786.0	1830.9	1878.8	1929.9	1984.5
	Capacity (kW)	61.1	67.1	73.4	80.0	87.1	94.6
	Unit Power (kW)	12.6	12.8	13.1	13.4	13.7	14.1
23.9	Head Press (kPa)	1996.5	2040.8	2087.9	2137.9	2191.1	2247.6
	Capacity (kW)	58.0	63.7	69.8	76.3	83.1	90.2
	Unit Power (kW)	13.8	14.0	14.3	14.6	14.9	15.3
29.4	Head Press (kPa)	2271.6	2317.9	2367.0	2419.0	2474.0	2532.2
	Capacity (kW)	54.5	60.0	65.9	72.0	78.5	85.4
	Unit Power (kW)	15.1	15.4	15.6	15.9	16.2	16.6
35	Head Press (kPa)	2570.4	2618.3	2668.9	2722.4	2778.8	2838.3
	Capacity (kW)	50.7	56.0	61.5	67.4	73.6	80.0
	Unit Power (kW)	16.7	16.9	17.2	17.4	17.7	18.1
40.6	Head Press (kPa)	2893.7	2942.7	2994.5	3049.1	3106.6	3167.1
	Capacity (kW)	46.6	51.6	56.9	62.5	68.3	74.4
	Unit Power (kW)	18.5	18.7	18.9	19.2	19.4	19.8
46.1	Head Press (kPa)	3243.4	3292.8	3345.0	3399.8	3457.3	3517.4
	Capacity (kW)	42.4	47.1	52.0	57.3	62.7	68.4
	Unit Power (kW)	20.5	20.7	20.9	21.1	21.4	21.7
51.7	Head Press (kPa)	3618.7	3667.3	3718.3	3771.8	3827.6	3885.7
	Capacity (kW)	38.0	42.4	47.0	51.8	56.8	62.1
	Unit Power (kW)	22.7	22.9	23.1	23.3	23.6	23.8

**Note:** Performance data calculated at 8.3°C subcooling and 8.3°C superheat and does not include capacity loss due to refrigerant lines.



# Gross Heating Capacities

**Table 42. Gross heating capacities (MBH) - TWA0604\*A heat pump with TWE0764\*A air handler at 2000 CFM (IP)**

Outdoor Temp (°F)	Integrated Heating Capacity (MBH) at Indicated Indoor Dry Bulb Temp (°F)				Total Power (kW) at Indicated Indoor Dry Bulb Temp (°F)			
	60	70	75	80	60	70	75	80
-18	20.1	18.4	17.6	16.7	3.9	4.3	4.5	4.7
-13	22.0	20.5	19.7	18.8	4.0	4.4	4.5	4.7
-8	24.3	22.8	22.0	21.1	4.1	4.4	4.6	4.8
-3	26.8	25.3	24.5	23.6	4.1	4.5	4.7	4.9
2	29.5	28.0	27.2	26.4	4.2	4.6	4.8	5.0
7	32.4	31.0	30.1	29.3	4.3	4.6	4.9	5.1
12	35.6	34.1	33.3	32.4	4.3	4.7	4.9	5.2
17	38.9	37.4	36.5	35.7	4.4	4.8	5.0	5.2
22	42.4	40.8	39.9	39.0	4.5	4.9	5.1	5.3
27	46.2	44.5	43.6	42.6	4.6	5.0	5.2	5.4
32	50.3	48.4	47.4	46.4	4.7	5.1	5.3	5.5
37	54.3	52.3	51.3	50.3	4.7	5.2	5.4	5.6
42	58.6	56.4	55.3	54.3	4.8	5.3	5.5	5.7
47	63.0	60.8	59.6	58.5	4.9	5.4	5.6	5.8
52	67.7	65.3	64.1	62.8	5.0	5.5	5.7	5.9
57	72.6	70.0	68.6	67.3	5.1	5.6	5.8	6.1
62	77.6	74.7	73.3	71.9	5.3	5.7	5.9	6.2
67	82.7	79.6	78.1	76.6	5.4	5.8	6.1	6.3
72	87.8	84.6	83.0	81.4	5.5	6.0	6.2	6.5

**Notes:**

1. Net heating capacity and power include indoor fan heat at AHRI ESP. To obtain net heating at other conditions, subtract fan heat at this condition and add fan heat at new condition.
2. Integrated heating capacities and power include the effects of defrost in the frost region. All heating capacities and power are at 70% outdoor relative humidity and demand defrost cycle.

**Table 43. Gross heating capacities (kW) TWA0604\*A heat pump with TWE0764\*A air handler at 2000 CFM (SI)**

Outdoor Temp (°C)	Integrated Heating Capacity (kW) at Indicated Indoor Dry Bulb Temp (°C)				Total Power (kW) at Indicated Indoor Dry Bulb Temp (°C)			
	15	21	24	27	15	21	24	27
-28	5.8	5.4	5.1	4.8	3.7	4.1	4.3	4.5
-25	6.4	5.9	5.7	5.4	3.8	4.2	4.4	4.6
-22	7.0	6.6	6.4	6.1	3.9	4.3	4.5	4.7
-19	7.7	7.3	7.1	6.8	3.9	4.3	4.5	4.8
-17	8.5	8.1	7.8	7.6	4.0	4.4	4.6	4.8
-14	9.3	8.9	8.7	8.4	4.1	4.5	4.7	4.9
-11	10.2	9.8	9.5	9.3	4.2	4.6	4.8	5.0
-8	11.2	10.7	10.5	10.2	4.2	4.7	4.9	5.1
-6	12.2	11.7	11.5	11.2	4.3	4.7	5.0	5.2
-3	13.3	12.8	12.5	12.2	4.4	4.8	5.1	5.3
0	14.5	13.9	13.6	13.4	4.5	4.9	5.2	5.4
3	15.6	15.0	14.8	14.5	4.6	5.0	5.3	5.5
6	16.8	16.2	15.9	15.6	4.7	5.1	5.4	5.6
8	18.1	17.5	17.2	16.8	4.8	5.2	5.5	5.7
11	19.5	18.8	18.5	18.1	4.9	5.4	5.6	5.9
14	20.9	20.2	19.8	19.4	5.0	5.5	5.7	6.0
17	22.4	21.6	21.2	20.8	5.1	5.6	5.9	6.1
19	23.8	23.0	22.6	22.2	5.3	5.8	6.0	6.3
22	25.4	24.5	24.0	23.6	5.4	5.9	6.1	6.4

**Notes:**

1. Net heating capacity and power include indoor fan heat at AHRI ESP. To obtain net heating at other conditions, subtract fan heat at this condition and add fan heat at new condition.
2. Integrated heating capacities and power include the effects of defrost in the frost region. All heating capacities and power are at 70% outdoor relative humidity and demand defrost cycle.



## Performance Data

**Table 44. Gross heating capacities (MBH) - TWA0604\*D heat pump with TWE0724\*B standard air handler at 2000 CFM (IP)**

Outdoor Temp (°F)	Integrated Heating Capacity (MBH) at Indicated Indoor Dry Bulb Temp (°F)				Total Power (kW) at Indicated Indoor Dry Bulb Temp (°F)			
	60	70	75	80	60	70	75	80
-18	11.3	9.5	9.8	9.7	3.4	3.6	3.8	4.0
-13	13.7	12.1	11.1	10.1	3.4	3.7	3.9	4.1
-8	16.5	14.9	13.9	12.9	3.5	3.8	4.0	4.2
-3	19.2	17.5	16.5	15.7	3.6	3.9	4.1	4.3
2	21.8	20.2	19.5	18.7	3.7	4.0	4.2	4.4
7	25.2	23.4	22.6	21.9	3.8	4.1	4.3	4.5
12	27.7	26.4	25.7	25.0	3.8	4.2	4.4	4.6
17	31.0	29.7	29.0	28.2	3.9	4.3	4.5	4.7
22	34.5	33.1	32.4	31.6	3.9	4.3	4.5	4.8
27	38.1	36.7	35.9	35.1	4.0	4.4	4.6	4.8
32	41.9	40.3	39.5	38.6	4.0	4.4	4.7	4.9
37	45.7	44.0	43.1	42.2	4.1	4.5	4.7	5.0
42	49.5	47.7	46.8	45.8	4.1	4.5	4.8	5.0
47	53.6	51.7	50.7	49.7	4.2	4.6	4.8	5.1
52	58.0	56.0	54.9	53.8	4.2	4.6	4.9	5.1
57	62.7	60.4	59.3	58.1	4.3	4.7	5.0	5.2
62	67.5	65.0	63.8	62.5	4.3	4.8	5.0	5.3
67	72.5	69.7	68.4	67.1	4.4	4.9	5.1	5.4
72	77.7	74.8	73.3	71.9	4.5	5.0	5.2	5.5

**Notes:**

1. Net heating capacity and power include indoor fan heat at AHRI ESP. To obtain net heating at other conditions, subtract fan heat at this condition and add fan heat at new condition.
2. Integrated heating capacities and power include the effects of defrost in the frost region. All heating capacities and power are at 70% outdoor relative humidity and demand defrost cycle.

**Table 45. Gross heating capacities (kW) TWA0604\*D heat pump with TWE0724\*B air handler at 2000 CFM (SI)**

Outdoor Temp (°C)	Integrated Heating Capacity (kW) at Indicated Indoor Dry Bulb Temp (°C)				Total Power (kW) at Indicated Indoor Dry Bulb Temp (°C)			
	15	21	24	27	15	21	24	27
-28	3.3	2.8	2.9	2.8	3.4	3.6	3.8	4.0
-25	4.0	3.5	3.3	2.9	3.4	3.7	3.9	4.1
-22	4.8	4.4	4.1	3.8	3.5	3.8	4.0	4.2
-19	5.6	5.1	4.8	4.6	3.6	3.9	4.1	4.3
-17	6.4	5.9	5.7	5.5	3.7	4.0	4.2	4.4
-14	7.4	6.8	6.6	6.4	3.8	4.1	4.3	4.5
-11	8.1	7.7	7.5	7.3	3.8	4.2	4.4	4.6
-8	9.1	8.7	8.5	8.3	3.9	4.3	4.5	4.7
-6	10.1	9.7	9.5	9.3	3.9	4.3	4.5	4.8
-3	11.2	10.7	10.5	10.3	4.0	4.4	4.6	4.8
0	12.3	11.8	11.6	11.3	4.0	4.4	4.7	4.9
3	13.4	12.9	12.6	12.4	4.1	4.5	4.7	5.0
6	14.5	14.0	13.7	13.4	4.1	4.5	4.8	5.0
8	15.7	15.1	14.9	14.6	4.2	4.6	4.8	5.1
11	17.0	16.4	16.1	15.8	4.2	4.6	4.9	5.1
14	18.4	17.7	17.4	17.0	4.3	4.7	5.0	5.2
17	19.8	19.1	18.7	18.3	4.3	4.8	5.0	5.3
19	21.2	20.4	20.0	19.7	4.4	4.9	5.1	5.4
22	22.8	21.9	21.5	21.1	4.5	5.0	5.2	5.5

**Notes:**

1. Net heating capacity and power include indoor fan heat at AHRI ESP. To obtain net heating at other conditions, subtract fan heat at this condition and add fan heat at new condition.
2. Integrated heating capacities and power include the effects of defrost in the frost region. All heating capacities and power are at 70% outdoor relative humidity and demand defrost cycle.

**Table 46. Gross heating capacities (MBH) TWA0764\*A heat pump with TWE0764\*A air handler at 2500 CFM (IP)**

Outdoor Temp (°F)	Integrated Heating Capacity (MBH) at Indicated Indoor Dry Bulb Temp (°F)				Total Power (kW) at Indicated Indoor Dry Bulb Temp (°F)			
	60	70	75	80	60	70	75	80
-18	17.5	17.2	16.9	16.4	3.7	4.1	4.2	4.4
-13	21.5	20.6	20.1	19.6	3.8	4.2	4.3	4.5
-8	24.0	23.7	23.3	22.9	3.9	4.2	4.4	4.6
-3	27.3	27.0	26.4	26.0	4.0	4.3	4.5	4.7
2	30.8	29.9	29.6	29.1	4.0	4.4	4.6	4.8
7	34.3	33.8	33.4	32.9	4.1	4.5	4.7	4.9
12	37.3	36.7	36.3	35.8	4.2	4.5	4.7	4.9
17	41.0	40.4	39.9	39.3	4.2	4.6	4.8	5.0
22	44.9	44.2	43.6	43.0	4.3	4.7	4.9	5.1
27	49.0	48.1	47.2	46.6	4.3	4.7	4.9	5.2
32	53.2	52.1	51.4	50.7	4.4	4.8	5.0	5.2
37	57.4	56.2	55.4	54.6	4.5	4.9	5.1	5.3
42	61.7	60.3	59.4	58.5	4.5	4.9	5.2	5.4
47	66.3	64.6	63.7	62.7	4.6	5.0	5.2	5.5
52	71.2	69.3	68.3	67.2	4.7	5.1	5.3	5.6
57	76.5	74.3	73.1	71.9	4.8	5.2	5.4	5.7
62	82.1	79.6	78.3	77.0	4.9	5.3	5.5	5.8
67	88.0	85.2	83.7	82.2	5.0	5.5	5.7	5.9
72	94.1	91.0	89.3	87.6	5.2	5.6	5.8	6.0

**Notes:**

1. Net heating capacity and power include indoor fan heat at AHRI ESP. To obtain net heating at other conditions, subtract fan heat at this condition and add fan heat at new condition.
2. Integrated heating capacities and power include the effects of defrost in the frost region. All heating capacities and power are at 70% outdoor relative humidity and demand defrost cycle.

**Table 47. Gross heating capacities (kW) TWA0764\*A heat pump with TWE0764\*A air handler at 2500 CFM (SI)**

Outdoor Temp (°C)	Integrated Heating Capacity (kW) at Indicated Indoor Dry Bulb Temp (°C)				Total Power (kW) at Indicated Indoor Dry Bulb Temp (°C)			
	15	21	24	27	15	21	24	27
-28	5.0	5.0	4.9	4.7	4.1	4.5	4.7	4.9
-25	6.3	6.0	5.8	5.7	4.2	4.6	4.8	5.0
-22	6.9	6.8	6.7	6.6	4.3	4.7	4.9	5.1
-19	7.7	7.6	7.7	7.5	4.4	4.8	5.0	5.3
-17	8.8	8.7	8.6	8.5	4.4	4.9	5.1	5.4
-14	9.7	9.6	9.4	9.3	4.5	5.0	5.2	5.5
-11	10.7	10.6	10.5	10.3	4.6	5.1	5.3	5.6
-8	11.8	11.6	11.5	11.3	4.7	5.2	5.4	5.6
-6	12.9	12.7	12.6	12.4	4.8	5.2	5.5	5.7
-3	14.1	13.9	13.7	13.5	4.8	5.3	5.6	5.8
0	15.3	15.0	14.9	14.7	4.9	5.4	5.7	5.9
3	16.6	16.2	16.0	15.8	5.0	5.5	5.7	6.0
6	17.8	17.4	17.2	16.9	5.1	5.6	5.8	6.1
8	19.1	18.7	18.4	18.1	5.2	5.7	5.9	6.2
11	20.5	20.0	19.7	19.4	5.3	5.8	6.0	6.3
14	22.0	21.4	21.1	20.8	5.4	5.9	6.2	6.5
17	23.6	23.0	22.6	22.2	5.5	6.0	6.3	6.6
19	25.4	24.6	24.2	23.8	5.7	6.2	6.5	6.7
22	27.1	26.3	25.8	25.3	5.8	6.4	6.6	6.9

**Notes:**

1. Net heating capacity and power include indoor fan heat at AHRI ESP. To obtain net heating at other conditions, subtract fan heat at this condition and add fan heat at new condition.
2. Integrated heating capacities and power include the effects of defrost in the frost region. All heating capacities and power are at 70% outdoor relative humidity and demand defrost cycle.



## Performance Data

**Table 48. Gross heating capacities (MBH) TWA0764\*D heat pump with TWE0764\*B air handler at 2500 CFM (IP)**

Outdoor Temp (°F)	Integrated Heating Capacity (MBH) at Indicated Indoor Dry Bulb Temp (°F)				Total Power (kW) at Indicated Indoor Dry Bulb Temp (°F)			
	60	70	75	80	60	70	75	80
-18	13.5	12.8	12.3	11.8	4.5	5.1	5.5	5.8
-13	16.5	16.0	15.6	15.2	4.6	5.2	5.5	5.8
-8	19.8	19.3	18.9	18.5	4.6	5.2	5.5	5.8
-3	23.3	22.7	22.4	21.9	4.6	5.2	5.5	5.9
2	26.9	26.4	26.0	25.5	4.7	5.2	5.6	5.9
7	30.7	30.0	29.6	29.1	4.7	5.3	5.6	5.9
12	34.6	33.8	33.3	32.8	4.8	5.3	5.6	6.0
17	38.8	37.8	37.2	36.7	4.8	5.4	5.7	6.0
22	43.2	42.0	41.4	40.8	4.9	5.4	5.7	6.1
27	47.7	46.3	45.6	44.9	4.9	5.5	5.8	6.1
32	52.5	50.9	50.0	49.2	5.0	5.6	5.9	6.2
37	57.2	55.4	54.5	53.5	5.1	5.6	5.9	6.2
42	62.0	59.9	58.9	57.9	5.1	5.7	6.0	6.3
47	67.0	64.6	63.5	62.4	5.2	5.8	6.1	6.4
52	72.2	69.7	68.5	67.3	5.3	5.8	6.1	6.5
57	77.7	74.9	73.5	72.2	5.4	5.9	6.2	6.5
62	83.4	80.4	78.9	77.5	5.4	6.0	6.3	6.6
67	89.4	86.1	84.5	82.9	5.5	6.1	6.4	6.7
72	95.4	91.7	89.8	85.5	5.6	6.2	6.5	7.1

**Notes:**

1. Net heating capacity and power include indoor fan heat at AHRI ESP. To obtain net heating at other conditions, subtract fan heat at this condition and add fan heat at new condition.
2. Integrated heating capacities and power include the effects of defrost in the frost region. All heating capacities and power are at 70% outdoor relative humidity and demand defrost cycle.

**Table 49. Gross heating capacities (kW) TWA0764\*D heat pump with TWE0764\*B air handler at 2500 CFM (SI)**

Outdoor Temp (°C)	Integrated Heating Capacity (kW) at Indicated Indoor Dry Bulb Temp (°C)				Total Power (kW) at Indicated Indoor Dry Bulb Temp (°C)			
	15	21	24	27	15	21	24	27
-28	3.9	3.7	3.6	3.4	4.5	5.1	5.5	5.8
-25	4.8	4.7	4.6	4.4	4.6	5.2	5.5	5.8
-22	5.8	5.7	5.5	5.4	4.6	5.2	5.5	5.8
-19	6.8	6.7	6.6	6.4	4.6	5.2	5.5	5.9
-17	7.9	7.7	7.6	7.5	4.7	5.2	5.6	5.9
-14	9.0	8.8	8.7	8.5	4.7	5.3	5.6	5.9
-11	10.1	9.9	9.8	9.6	4.8	5.3	5.6	6.0
-8	11.4	11.1	10.9	10.8	4.8	5.4	5.7	6.0
-6	12.7	12.3	12.1	11.9	4.9	5.4	5.7	6.1
-3	14.0	13.6	13.4	13.2	4.9	5.5	5.8	6.1
0	15.4	14.9	14.7	14.4	5.0	5.6	5.9	6.2
3	16.8	16.2	16.0	15.7	5.1	5.6	5.9	6.2
6	18.2	17.6	17.3	17.0	5.1	5.7	6.0	6.3
8	19.6	18.9	18.6	18.3	5.2	5.8	6.1	6.4
11	21.1	20.4	20.1	19.7	5.3	5.8	6.1	6.5
14	22.8	22.0	21.6	21.2	5.4	5.9	6.2	6.5
17	24.4	23.6	23.1	22.7	5.4	6.0	6.3	6.6
19	26.2	25.2	24.8	24.3	5.5	6.1	6.4	6.7
22	28.0	26.9	26.3	25.1	5.6	6.2	6.5	7.1

**Notes:**

1. Net heating capacity and power include indoor fan heat at AHRI ESP. To obtain net heating at other conditions, subtract fan heat at this condition and add fan heat at new condition.
2. Integrated heating capacities and power include the effects of defrost in the frost region. All heating capacities and power are at 70% outdoor relative humidity and demand defrost cycle.

**Table 50. Gross heating capacities (MBH) TWA1014\*A heat pump with TWE1014\*A air handler at 3350 CFM (IP)**

Outdoor Temp (°F)	Integrated Heating Capacity (MBH) at Indicated Indoor Dry Bulb Temp (°F)				Total Power (kW) at Indicated Indoor Dry Bulb Temp (°F)			
	60	70	75	80	60	70	75	80
-18	25.4	25.3	25.3	25.2	6.4	7.0	7.3	7.7
-13	29.8	29.6	29.5	29.3	6.5	7.1	7.5	7.8
-8	34.4	34.1	34.0	33.8	6.6	7.3	7.6	8.0
-3	39.2	38.8	38.6	38.3	6.8	7.4	7.8	8.1
2	44.1	43.6	43.3	43.0	6.9	7.5	7.9	8.3
7	49.2	48.6	48.2	48.0	7.0	7.7	8.0	8.4
12	54.3	53.6	53.2	52.8	7.1	7.8	8.1	8.5
17	59.9	59.1	58.5	58.0	7.2	7.9	8.3	8.6
22	65.8	64.7	64.1	63.5	7.3	8.0	8.4	8.7
27	71.9	70.6	70.0	69.3	7.4	8.1	8.5	8.8
32	78.5	77.0	76.3	75.4	7.5	8.2	8.6	8.9
37	84.9	83.1	82.2	81.3	7.6	8.3	8.6	9.0
42	91.5	89.5	88.5	87.5	7.7	8.4	8.7	9.1
47	98.5	96.1	95.0	93.8	7.8	8.4	8.8	9.2
52	105.6	103.0	101.7	100.3	7.8	8.5	8.9	9.3
57	112.7	109.8	108.3	106.7	7.9	8.6	8.9	9.3
62	119.6	116.2	114.5	112.8	8.0	8.6	9.0	9.4
67	126.9	123.2	121.4	119.5	8.1	8.7	9.1	9.5
72	134.9	130.8	128.8	126.8	8.2	8.9	9.3	9.6

**Notes:**

1. Net heating capacity and power include indoor fan heat at AHRI ESP. To obtain net heating at other conditions, subtract fan heat at this condition and add fan heat at new condition.
2. Integrated heating capacities and power include the effects of defrost in the frost region. All heating capacities and power are at 70% outdoor relative humidity and demand defrost cycle.

**Table 51. Gross heating capacities (kW) TWA1014\*A heat pump with TWE1014\*A air handler at 3350 CFM (SI)**

Outdoor Temp (°C)	Integrated Heating Capacity (kW) at Indicated Indoor Dry Bulb Temp (°C)				Total Power (kW) at Indicated Indoor Dry Bulb Temp (°C)			
	15	21	24	27	15	21	24	27
-28	7.4	7.4	7.4	7.4	6.4	7.0	7.3	7.7
-25	8.7	8.7	8.6	8.6	6.5	7.1	7.5	7.8
-22	10.1	10.0	10.0	9.9	6.6	7.3	7.6	8.0
-19	11.5	11.4	11.3	11.2	6.8	7.4	7.8	8.1
-17	12.9	12.8	12.7	12.6	6.9	7.5	7.9	8.3
-14	14.4	14.3	14.1	14.1	7.0	7.7	8.0	8.4
-11	15.9	15.7	15.6	15.5	7.1	7.8	8.1	8.5
-8	17.6	17.3	17.2	17.0	7.2	7.9	8.3	8.6
-6	19.3	19.0	18.8	18.6	7.3	8.0	8.4	8.7
-3	21.1	20.7	20.5	20.3	7.4	8.1	8.5	8.8
0	23.0	22.6	22.4	22.1	7.5	8.2	8.6	8.9
3	24.9	24.4	24.1	23.8	7.6	8.3	8.6	9.0
6	26.8	26.2	25.9	25.6	7.7	8.4	8.7	9.1
8	28.9	28.2	27.8	27.5	7.8	8.4	8.8	9.2
11	31.0	30.2	29.8	29.4	7.8	8.5	8.9	9.3
14	33.0	32.2	31.7	31.3	7.9	8.6	8.9	9.3
17	35.1	34.1	33.6	33.1	8.0	8.6	9.0	9.4
19	37.2	36.1	35.6	35.0	8.1	8.7	9.1	9.5
22	39.5	38.3	37.7	37.1	8.2	8.9	9.3	9.6

**Notes:**

1. Net heating capacity and power include indoor fan heat at AHRI ESP. To obtain net heating at other conditions, subtract fan heat at this condition and add fan heat at new condition.
2. Integrated heating capacities and power include the effects of defrost in the frost region. All heating capacities and power are at 70% outdoor relative humidity and demand defrost cycle.



## Performance Data

**Table 52. Gross heating capacities (MBH) TWA1014\*D heat pump with TWE1014\*B air handler at 3350 CFM (IP)**

Outdoor Temp (°F)	Integrated Heating Capacity (MBH) at Indicated Indoor Dry Bulb Temp (°F)				Total Power (kW) at Indicated Indoor Dry Bulb Temp (°F)			
	60	70	75	80	60	70	75	80
-18	23.1	22.5	22.2	21.6	5.9	6.4	6.7	7.1
-13	26.7	26.4	26.1	25.5	5.9	6.6	6.9	7.2
-8	31.0	30.6	30.2	29.6	6.1	6.7	7.0	7.4
-3	35.5	34.9	34.4	33.8	6.2	6.8	7.2	7.5
2	40.3	39.4	38.9	38.3	6.3	6.9	7.3	7.7
7	45.3	44.2	43.6	42.8	6.3	7.0	7.4	7.8
12	50.2	48.9	48.4	47.6	6.4	7.1	7.5	7.9
17	55.6	54.0	53.2	52.4	6.5	7.2	7.6	8.0
22	61.2	59.4	58.5	57.6	6.6	7.3	7.7	8.2
27	67.1	65.1	64.1	63.1	6.7	7.4	7.8	8.3
32	73.3	70.9	69.9	68.8	6.8	7.5	7.9	8.4
37	79.5	77.0	75.8	74.6	6.9	7.6	8.0	8.5
42	85.9	83.1	81.8	80.6	7.0	7.7	8.1	8.6
47	92.6	89.5	88.1	86.7	7.1	7.8	8.2	8.7
52	99.7	96.2	94.7	93.2	7.2	7.9	8.3	8.8
57	106.8	103.0	101.3	99.7	7.3	8.0	8.4	8.9
62	114.0	109.9	108.0	106.2	7.4	8.1	8.5	9.0
67	121.0	116.6	114.5	112.6	7.5	8.2	8.6	9.1
72	127.8	122.9	120.7	118.6	7.6	8.3	8.7	9.1

**Notes:**

1. Net heating capacity and power include indoor fan heat at AHRI ESP. To obtain net heating at other conditions, subtract fan heat at this condition and add fan heat at new condition.
2. Integrated heating capacities and power include the effects of defrost in the frost region. All heating capacities and power are at 70% outdoor relative humidity and demand defrost cycle.

**Table 53. Gross heating capacities (kW) TWA1014\*D heat pump with TWE1014\*B air handler at 3350 CFM (SI)**

Outdoor Temp (°C)	Integrated Heating Capacity (kW) at Indicated Indoor Dry Bulb Temp (°C)				Total Power (kW) at Indicated Indoor Dry Bulb Temp (°C)			
	15	21	24	27	15	21	24	27
-28	6.8	6.6	6.5	6.3	5.9	6.4	6.7	7.1
-25	7.8	7.7	7.7	7.5	5.9	6.6	6.9	7.2
-22	9.1	9.0	8.8	8.7	6.1	6.7	7.0	7.4
-19	10.4	10.2	10.1	9.9	6.2	6.8	7.2	7.5
-17	11.8	11.6	11.4	11.2	6.3	6.9	7.3	7.7
-14	13.3	12.9	12.8	12.6	6.3	7.0	7.4	7.8
-11	14.7	14.3	14.2	14.0	6.4	7.1	7.5	7.9
-8	16.3	15.8	15.6	15.4	6.5	7.2	7.6	8.0
-6	17.9	17.4	17.2	16.9	6.6	7.3	7.7	8.2
-3	19.7	19.1	18.8	18.5	6.7	7.4	7.8	8.3
0	21.5	20.8	20.5	20.2	6.8	7.5	7.9	8.4
3	23.3	22.6	22.2	21.9	6.9	7.6	8.0	8.5
6	25.2	24.4	24.0	23.6	7.0	7.7	8.1	8.6
8	27.1	26.2	25.8	25.4	7.1	7.8	8.2	8.7
11	29.2	28.2	27.7	27.3	7.2	7.9	8.3	8.8
14	31.3	30.2	29.7	29.2	7.3	8.0	8.4	8.9
17	33.4	32.2	31.7	31.1	7.4	8.1	8.5	9.0
19	35.5	34.2	33.6	33.0	7.5	8.2	8.6	9.1
22	37.5	36.0	35.4	34.8	7.6	8.3	8.7	9.1

**Notes:**

1. Net heating capacity and power include indoor fan heat at AHRI ESP. To obtain net heating at other conditions, subtract fan heat at this condition and add fan heat at new condition.
2. Integrated heating capacities and power include the effects of defrost in the frost region. All heating capacities and power are at 70% outdoor relative humidity and demand defrost cycle.

**Table 54. Gross heating capacities (MBH) TWA1564\*D heat pump with TWE1564\*B air handler at 5000 CFM (IP)**

Outdoor Temp (°F)	Integrated Heating Capacity (MBH) at Indicated Indoor Dry Bulb Temp (°F)				Total Power (kW) at Indicated Indoor Dry Bulb Temp (°F)			
	60	70	75	80	60	70	75	80
-18	37.6	35.4	34.6	32.2	11.5	12.1	12.5	13.0
-13	44.0	40.8	39.3	38.2	11.2	12.2	12.7	13.3
-8	50.6	47.0	45.9	45.4	11.4	12.4	13.0	13.7
-3	57.2	54.3	53.6	53.0	11.6	12.7	13.4	14.0
2	64.3	62.3	61.5	60.7	11.8	13.0	13.7	14.3
7	73.3	70.8	69.8	69.0	12.2	13.3	14.0	14.7
12	82.1	79.7	78.6	77.6	12.4	13.6	14.3	15.0
17	92.3	89.1	87.8	86.7	12.7	13.9	14.6	15.3
22	101.9	99.1	97.5	96.3	13.0	14.2	14.9	15.6
27	112.6	109.5	107.8	106.3	13.3	14.5	15.2	15.9
32	124.2	120.4	118.6	116.9	13.6	14.8	15.5	16.2
37	135.3	131.4	129.5	127.6	13.9	15.1	15.8	16.5
42	147.5	143.1	141.0	139.0	14.2	15.4	16.1	16.8
47	160.3	155.7	153.5	151.3	14.5	15.8	16.5	17.2
52	174.0	169.0	166.6	164.2	14.9	16.1	16.8	17.6
57	188.1	182.8	180.2	177.6	15.2	16.5	17.2	17.9
62	202.8	197.1	194.3	191.6	15.6	16.9	17.6	18.3
67	217.3	211.9	208.9	206.0	16.1	17.3	18.0	18.8
72	231.9	227.1	223.9	220.9	16.6	17.8	18.5	19.3

**Notes:**

1. Net heating capacity and power include indoor fan heat at AHRI ESP. To obtain net heating at other conditions, subtract fan heat at this condition and add fan heat at new condition.
2. Integrated heating capacities and power include the effects of defrost in the frost region. All heating capacities and power are at 70% outdoor relative humidity and demand defrost cycle.

**Table 55. Gross heating capacities (kW) TWA1564\*D heat pump with TWE1564\*B air handler at 5000 CFM (SI)**

Outdoor Temp (°C)	Integrated Heating Capacity (kW) at Indicated Indoor Dry Bulb Temp (°C)				Total Power (kW) at Indicated Indoor Dry Bulb Temp (°C)			
	15	21	24	27	15	21	24	27
-28	10.6	10.3	9.7	9.3	9.7	10.2	10.7	11.3
-25	12.8	11.9	11.4	11.1	9.5	10.4	11.0	11.6
-22	14.6	13.6	13.2	13.0	9.7	10.7	11.2	11.9
-19	16.5	15.6	15.4	15.2	9.9	11.0	11.6	12.2
-17	18.5	17.9	17.7	17.4	10.1	11.3	11.9	12.5
-14	21.0	20.4	20.1	19.8	10.4	11.6	12.2	12.8
-11	23.6	23.0	22.6	22.3	10.7	11.9	12.5	13.1
-8	26.4	25.6	25.2	24.9	11.0	12.2	12.8	13.5
-6	29.3	28.4	28.0	27.7	11.3	12.5	13.1	13.8
-3	32.5	31.5	31.0	30.6	11.6	12.8	13.4	14.1
0	35.7	34.6	34.1	33.6	11.9	13.1	13.7	14.4
3	39.0	37.8	37.3	36.7	12.2	13.3	14.0	14.7
6	42.4	41.2	40.6	40.0	12.5	13.7	14.3	15.0
8	46.2	44.8	44.2	43.6	12.8	14.0	14.7	15.3
11	50.1	48.7	48.0	47.3	13.1	14.4	15.0	15.7
14	54.2	52.7	51.9	51.2	13.5	14.7	15.4	16.1
17	58.5	56.9	56.0	55.3	13.9	15.1	15.8	16.5
19	62.8	61.2	60.3	59.5	14.2	15.5	16.2	16.9
22	67.1	65.6	64.7	63.8	14.6	15.9	16.6	17.4

**Notes:**

1. Net heating capacity and power include indoor fan heat at AHRI ESP. To obtain net heating at other conditions, subtract fan heat at this condition and add fan heat at new condition.
2. Integrated heating capacities and power include the effects of defrost in the frost region. All heating capacities and power are at 70% outdoor relative humidity and demand defrost cycle.



## Performance Data

**Table 56. Gross heating capacities (MBH) TWA2014\*D heat pump with TWE2014\*B air handler at 6675 CFM (IP)**

Outdoor Temp (°F)	Integrated Heating Capacity (MBH) at Indicated Indoor Dry Bulb Temp (°F)				Total Power (kW) at Indicated Indoor Dry Bulb Temp (°F)			
	60	70	75	80	60	70	75	80
-18	52.8	47.6	44.0	40.8	13.2	14.3	14.7	15.5
-13	61.0	55.5	52.9	50.4	13.4	14.6	15.3	15.9
-8	70.1	64.4	61.6	59.0	13.6	15.0	15.6	16.4
-3	79.5	73.9	71.3	69.0	14.0	15.3	16.1	16.8
2	89.7	84.6	82.2	79.6	14.4	15.7	16.5	17.2
7	100.9	95.9	93.4	90.9	14.7	16.1	16.9	17.7
12	113.1	107.8	105.2	102.6	15.1	16.5	17.3	18.1
17	125.9	120.4	117.6	114.8	15.4	16.9	17.6	18.5
22	139.4	133.6	130.8	127.8	15.8	17.2	18.0	18.9
27	153.6	147.5	144.5	141.4	16.1	17.6	18.4	19.2
32	168.4	162.1	158.8	155.6	16.5	18.0	18.8	19.6
37	183.3	176.6	173.2	169.7	16.8	18.3	19.2	20.0
42	198.8	191.7	188.1	184.5	17.2	18.7	19.5	20.4
47	215.2	207.7	203.9	200.0	17.6	19.1	20.0	20.9
52	232.5	224.5	220.5	216.5	18.0	19.6	20.4	21.3
57	250.4	242.0	237.7	233.5	18.4	20.0	20.9	21.8
62	268.8	260.0	255.5	251.1	18.9	20.5	21.4	22.3
67	287.4	278.1	273.5	268.9	19.3	21.0	21.9	22.8
72	306.4	296.7	291.9	287.1	19.8	21.5	22.4	23.3

**Notes:**

1. Net heating capacity and power include indoor fan heat at AHRI ESP. To obtain net heating at other conditions, subtract fan heat at this condition and add fan heat at new condition.
2. Integrated heating capacities and power include the effects of defrost in the frost region. All heating capacities and power are at 70% outdoor relative humidity and demand defrost cycle.

**Table 57. Gross heating capacities (kW) TWA2014\*D heat pump with TWE2014\*B air handler at 6675 CFM (SI)**

Outdoor Temp (°C)	Integrated Heating Capacity (kW) at Indicated Indoor Dry Bulb Temp (°C)				Total Power (kW) at Indicated Indoor Dry Bulb Temp (°C)			
	15	21	24	27	15	21	24	27
-28	15.3	13.8	13.2	12.3	12.1	13.3	13.8	14.6
-25	17.6	16.0	15.1	14.5	12.4	13.6	14.1	14.9
-22	20.0	18.4	17.6	16.8	12.6	13.8	14.5	15.2
-19	22.6	21.0	20.1	19.5	12.9	14.1	14.8	15.6
-17	25.3	23.7	23.0	22.3	13.1	14.4	15.2	15.9
-14	28.2	26.7	26.0	25.3	13.4	14.8	15.5	16.3
-11	31.3	29.8	29.1	28.3	13.7	15.1	15.8	16.6
-8	34.6	33.1	32.3	31.5	13.9	15.3	16.1	16.9
-6	38.1	36.4	35.6	34.7	14.2	15.6	16.4	17.2
-3	41.7	39.9	39.0	38.1	14.5	15.9	16.7	17.5
0	45.4	43.5	42.6	41.6	14.8	16.2	17.0	17.8
3	49.1	47.1	46.1	45.1	15.1	16.5	17.3	18.1
6	52.9	50.8	49.7	48.6	15.4	16.9	17.6	18.4
8	57.2	55.0	53.8	52.7	15.8	17.2	18.0	18.8
11	61.1	58.7	57.5	56.4	16.1	17.6	18.3	19.2
14	65.5	63.0	61.7	60.5	16.5	18.0	18.7	19.6
17	70.0	67.4	66.0	64.7	16.9	18.4	19.2	20.0
19	74.6	71.8	70.4	69.0	17.4	18.8	19.6	20.4
22	79.2	76.3	74.8	73.4	17.8	19.3	20.1	20.9

**Notes:**

1. Net heating capacity and power include indoor fan heat at AHRI ESP. To obtain net heating at other conditions, subtract fan heat at this condition and add fan heat at new condition.
2. Integrated heating capacities and power include the effects of defrost in the frost region. All heating capacities and power are at 70% outdoor relative humidity and demand defrost cycle.



## Fan Performance

**Table 58. Evaporator fan performance – TWE051 – air handler (IP)**

CFM	External Static Pressure (Inches of Water Gauge)																					
	0.10"		0.20"		0.30"		0.40"		0.50"		0.60"		0.70"		0.80"		0.90"		1.00"		1.10"	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
	<b>0.5 HP Standard Motor</b>										<b>1 HP High Static Motor</b>											
1400	612	0.20	674	0.24	731	0.29	786	0.34	840	0.39	891	0.45	941	0.51	989	0.58	1034	0.65	1077	0.72	1117	0.78
1500	647	0.24	705	0.29	760	0.34	812	0.39	863	0.44	912	0.50	960	0.56	1006	0.63	1051	0.70	1094	0.77	—	—
1600	683	0.28	738	0.33	790	0.38	840	0.44	888	0.50	936	0.56	980	0.62	1025	0.69	1070	0.76	1111	0.83	—	—
1700	719	0.33	771	0.38	821	0.44	869	0.50	914	0.56	959	0.62	1003	0.68	1047	0.75	1089	0.82	—	—	—	—
1800	756	0.39	804	0.44	853	0.50	898	0.56	942	0.62	985	0.69	1028	0.75	1068	0.82	1109	0.89	—	—	—	—
1900	792	0.45	838	0.51	884	0.57	928	0.63	971	0.69	1012	0.76	1052	0.83	1092	0.90	—	—	—	—	—	—
2000	829	0.52	873	0.58	917	0.64	959	0.71	1000	0.77	1040	0.84	1079	0.91	1117	0.98	—	—	—	—	—	—
2100	866	0.60	908	0.66	950	0.72	991	0.79	1030	0.86	1069	0.93	1106	1.00	1144	1.08	—	—	—	—	—	—

**Notes:**

1. Data includes pressure drop due to wet coil and 1" filter.
2. Fan motor heat (MBh) = 3.15 x BHP.
3. Factory supplied motors, in commercial equipment, are definite purpose motors, specifically designed and tested to operate reliably and continuously at all cataloged conditions. Using the full horsepower range of our fan motors as shown in our tabular data will not result in nuisance tripping or premature motor failure. Our product's warranty will not be affected.

**Table 59. Evaporator fan performance – TWE051 – air handler (SI)**

m <sup>3</sup> /hr	External Static Pressure (Pascals)																					
	25		50		75		100		125		150		174		199		224		249		274	
	RPM	kW	RPM	kW	RPM	kW	RPM	kW	RPM	kW	RPM	kW	RPM	kW	RPM	kW	RPM	kW	RPM	kW	RPM	kW
	<b>0.38 kW Standard Motor</b>										<b>.75 kW High Static Motor</b>											
2379	612	0.15	674	0.18	731	0.22	786	0.25	840	0.29	891	0.34	941	0.38	989	0.43	1034	0.48	1077	0.53	1117	0.58
2549	647	0.18	705	0.21	760	0.25	812	0.29	863	0.33	912	0.37	960	0.42	1006	0.47	1051	0.52	1094	0.58	—	—
2719	683	0.21	738	0.25	790	0.29	840	0.33	888	0.37	936	0.42	980	0.46	1025	0.51	1070	0.57	1111	0.62	—	—
2889	719	0.25	771	0.29	821	0.33	869	0.37	914	0.41	959	0.46	1003	0.51	1047	0.56	1089	0.61	—	—	—	—
3059	756	0.29	804	0.33	853	0.37	898	0.42	942	0.46	985	0.51	1028	0.56	1068	0.61	1109	0.66	—	—	—	—
3228	792	0.34	838	0.38	884	0.42	928	0.47	971	0.52	1012	0.57	1052	0.62	1092	0.67	—	—	—	—	—	—
3398	829	0.39	873	0.43	917	0.48	959	0.53	1000	0.58	1040	0.63	1079	0.68	1117	0.73	—	—	—	—	—	—
3568	866	0.45	908	0.49	950	0.54	991	0.59	1030	0.64	1069	0.69	1106	0.75	1144	0.80	—	—	—	—	—	—

**Notes:**

1. Data includes pressure drop due to wet coil and 1" filter.
2. Fan motor heat (kW) = 1.238 x kW.
3. Factory supplied motors, in commercial equipment, are definite purpose motors, specifically designed and tested to operate reliably and continuously at all cataloged conditions. Using the full horsepower range of our fan motors as shown in our tabular data will not result in nuisance tripping or premature motor failure. Our product's warranty will not be affected.



## Performance Data

Table 60. Evaporator fan performance – TWE072 – air handler (IP)

External Static Pressure (Inches of Water Gauge)																								
		0.10"		0.20"		0.30"		0.40"		0.50"		0.60"		0.70"		0.80"		0.90"		1.00"		1.10"		
CFM	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP		
<b>1 HP Standard Motor</b>												<b>1.5 HP High Static Motor</b>												
1600	—	—	—	—	550	0.33	629	0.39	695	0.46	747	0.52	807	0.72	854	0.77	887	0.80	906	0.81	912	0.82		
1700	—	—	—	—	559	0.35	634	0.43	697	0.48	751	0.61	809	0.75	857	0.81	894	0.84	920	0.87	985	1.07		
1800	—	—	—	—	569	0.38	640	0.46	701	0.53	756	0.64	813	0.77	861	0.85	901	0.90	952	1.07	991	1.14		
1900	—	—	—	—	578	0.41	647	0.50	707	0.58	761	0.68	817	0.81	866	0.90	912	1.01	957	1.13	996	1.21		
2000	—	—	522	0.34	590	0.45	654	0.52	711	1	768	0.73	821	0.84	870	0.95	917	1.06	962	1.20	1002	1.27		
2100	—	—	534	0.38	599	0.48	662	0.59	719	0.67	774	0.77	826	0.88	875	1.00	921	1.11	968	1.27	1007	1.35		
2200	474	0.30	547	0.43	610	0.52	671	0.64	727	0.72	781	0.82	832	0.93	881	1.06	926	1.17	973	1.33	1013	1.42		
2300	489	0.35	560	0.47	621	0.56	680	0.69	736	0.77	788	0.87	838	0.98	886	1.12	932	1.23	979	1.40	1018	1.50		
2400	505	0.41	573	0.52	632	0.61	690	0.74	745	0.83	796	0.93	844	1.04	893	1.18	937	1.30	969	1.47	1023	1.57		
<b>External Static Pressure (Inches of Water Gauge)</b>																								
		1.20"		1.30"		1.40"		1.50"		1.60"		1.70"												
CFM	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP										
<b>2 HP Ultra High Static Motor</b>																								
1600	1018	1.09	1060	1.21	1094	1.29	—	—	—	—	—	—	—	—										
1700	1024	1.16	1065	1.28	1099	1.37	—	—	—	—	—	—	—	—										
1800	1029	1.24	1070	1.35	1105	1.45	—	—	—	—	—	—	—	—										
1900	1035	1.31	1075	1.42	1110	1.53	—	—	—	—	—	—	—	—										
2000	1040	1.38	1080	1.50	1116	1.61	—	—	—	—	—	—	—	—										
2100	1046	1.46	1085	1.58	1122	1.69	—	—	—	—	—	—	—	—										
2200	1052	1.54	1090	1.66	—	—	—	—	—	—	—	—	—	—										
2300	1057	1.62	1095	1.74	—	—	—	—	—	—	—	—	—	—										
2400	1063	1.70	1101	1.82	—	—	—	—	—	—	—	—	—	—										

**Notes:**

1. Data includes pressure drop due to wet coil and 1" filter.
2. Fan motor heat (MBh) = 3.15 x BHP.
3. Factory supplied motors, in commercial equipment, are definite purpose motors, specifically designed and tested to operate reliably and continuously at all cataloged conditions. Using the full horsepower range of our fan motors as shown in our tabular data will not result in nuisance tripping or premature motor failure. Our product's warranty will not be affected.

**Table 61. Evaporator fan performance – TWE072 – air handler (SI)**

External Static Pressure (Pascals)																							
		25		50		75		100		125		150		174		199		224		249		274	
m <sup>3</sup> /hr		RPM	kW	RPM	kW	RPM	kW	RPM	kW	RPM	kW	RPM	kW	RPM	kW	RPM	kW	RPM	kW	RPM	kW	RPM	kW
		<b>.75 kW Standard Motor</b>						<b>1.12 kW High Static Motor</b>						<b>1.5 kW Ultra High Static Motor</b>									
2718	—	—	—	—	—	550	0.25	629	0.29	695	0.34	747	0.39	807	0.54	854	0.58	887	0.60	906	0.61	912	0.61
2888	—	—	—	—	—	559	0.26	634	0.32	697	0.36	751	0.45	809	0.56	857	0.61	894	0.62	920	0.65	985	0.80
3058	—	—	—	—	—	569	0.29	640	0.34	701	0.39	756	0.48	813	0.58	861	0.64	901	0.67	952	0.80	991	0.85
3228	—	—	—	—	—	578	0.31	647	0.37	707	0.43	761	0.51	817	0.60	866	0.67	912	0.75	957	0.84	996	0.90
3398	—	—	—	522	0.26	590	0.34	654	0.39	711	0.46	768	0.54	821	0.63	870	0.71	917	0.79	962	0.89	1002	0.95
3568	—	—	—	534	0.29	599	0.36	662	0.44	719	0.50	774	0.57	826	0.66	875	0.75	921	0.83	968	0.94	1007	1.01
3738	474	0.22	547	0.32	610	0.39	671	0.47	727	0.54	781	0.61	832	0.69	881	0.79	926	0.87	973	1.00	1013	1.06	
3908	489	0.26	560	0.35	621	0.42	680	0.51	736	0.58	788	0.65	838	0.73	886	0.83	932	0.92	979	1.05	1018	1.12	
4078	505	0.30	573	0.39	632	0.46	690	0.55	745	0.62	796	0.69	844	0.78	893	0.88	937	0.97	969	1.10	1023	1.17	

**External Static Pressure (Pascals)**

		299		324		349	
m <sup>3</sup> /hr		RPM	kW	RPM	kW	RPM	kW
		<b>1.5 kW Ultra High Static Motor</b>					
2718	1018	0.81	1060	0.90	1094	0.96	
2888	1024	0.87	1065	0.95	1099	1.02	
3058	1029	0.92	1070	1.00	1105	1.08	
3228	1035	0.98	1075	1.06	1110	1.14	
3398	1040	1.03	1080	1.12	1116	1.20	
3568	1046	1.09	1085	1.18	1122	1.26	
3738	1052	1.15	1090	1.24	—	—	
3908	1057	1.21	1095	1.30	—	—	
4078	1063	1.27	1101	1.36	—	—	

**Notes:**

1. Data includes pressure drop due to wet coil and 1" filter.
2. Fan motor heat (kW) = 1.238 x kW.
3. Factory supplied motors, in commercial equipment, are definite purpose motors, specifically designed and tested to operate reliably and continuously at all cataloged conditions. Using the full horsepower range of our fan motors as shown in our tabular data will not result in nuisance tripping or premature motor failure. Our product's warranty will not be affected.



## Performance Data

**Table 62. Evaporator fan performance – TWE076 – air handler (IP)**

External Static Pressure (Inches of Water Gauge)																								
		0.10"		0.20"		0.30"		0.40"		0.50"		0.60"		0.70"		0.80"		0.90"		1.00"		1.10"		
CFM	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP		
						<b>1 HP Standard Motor</b>						<b>1.5 HP High Static Motor</b>						<b>2 HP Ultra High Static Motor</b>						
2000	—	—	522	0.34	590	0.44	654	0.52	711	0.62	768	0.73	821	0.84	870	0.95	916	1.06	959	1.16	1001	1.27		
2125	—	—	537	0.39	604	0.48	664	0.58	721	0.68	775	0.78	828	0.90	877	1.01	923	1.13	966	1.25	1009	1.36		
2250	481	0.33	553	0.44	617	0.53	675	0.64	731	0.74	784	0.84	834	0.96	884	1.09	929	1.21	973	1.33	1016	1.46		
2375	501	0.39	569	0.49	631	0.59	688	0.70	742	0.81	794	0.91	842	1.03	891	1.16	937	1.29	981	1.42	1022	1.55		
2500	521	0.47	585	0.55	646	0.65	701	0.77	754	0.89	804	0.99	852	1.11	898	1.23	944	1.37	987	1.51	1028	1.64		
2625	540	0.53	602	0.61	661	0.72	715	0.84	767	0.97	816	1.08	862	1.19	908	1.32	950	1.45	994	1.60	1036	1.74		
2750	559	0.60	619	0.66	677	0.80	729	0.91	780	1.05	827	1.17	872	1.29	916	1.41	960	1.55	1001	1.69	1043	1.84		
2875	579	0.67	636	0.72	692	0.88	744	1.00	793	1.13	840	1.27	885	1.40	928	1.52	969	1.65	1009	1.79	1049	1.94		
3000	599	0.74	654	0.79	709	0.96	760	1.09	807	1.22	852	1.36	896	1.51	939	1.63	980	1.76	1019	1.90	1057	2.05		
<b>External Static Pressure (Inches of Water Gauge)</b>																								
		1.20"		1.30"		1.40"		1.50"		1.60"		1.70"												
CFM	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP										
						<b>2 HP Ultra High Static Motor</b>																		
2000	1040	1.38	1080	1.50	1116	1.61	—	—	—	—	—	—	—	—										
2125	1048	1.48	1085	1.59	1123	1.71	—	—	—	—	—	—	—	—										
2250	1054	1.58	1093	1.70	—	—	—	—	—	—	—	—	—	—										
2375	1062	1.68	1099	1.80	—	—	—	—	—	—	—	—	—	—										
2500	1068	1.78	1107	1.92	—	—	—	—	—	—	—	—	—	—										
2625	1075	1.88	1113	2.02	—	—	—	—	—	—	—	—	—	—										
2750	1083	1.99	—	—	—	—	—	—	—	—	—	—	—	—										
2875	1090	2.10	—	—	—	—	—	—	—	—	—	—	—	—										
3000	1097	2.21	—	—	—	—	—	—	—	—	—	—	—	—										

**Notes:**

1. Data includes pressure drop due to wet coil and 1" filter.
2. Fan motor heat (MBh) = 3.15 x BHP.
3. Factory supplied motors, in commercial equipment, are definite purpose motors, specifically designed and tested to operate reliably and continuously at all cataloged conditions. Using the full horsepower range of our fan motors as shown in our tabular data will not result in nuisance tripping or premature motor failure. Our product's warranty will not be affected.

**Table 63. Evaporator fan performance – TWE076 – air handler (SI)**

External Static Pressure (Pascals)																						
m <sup>3</sup> /hr	25		50		75		100		125		150		174		199		224		249		274	
	RPM	kW	RPM	kW	RPM	kW	RPM	kW	RPM	kW	RPM	kW	RPM	kW	RPM	kW	RPM	kW	RPM	kW	RPM	kW
	<b>.75 kW Standard Motor</b>						<b>1.12 kW High Static Motor</b>						<b>1.5 kW Ultra High Static Motor</b>									
3398	—	0.18	522	0.25	590	0.33	654	0.39	711	0.46	768	0.54	821	0.62	870	0.71	916	0.79	959	0.87	1001	0.95
3611	—	0.21	537	0.29	604	0.36	664	0.43	721	0.50	775	0.58	828	0.67	877	0.76	923	0.84	966	0.93	1009	1.02
3823	481	0.24	553	0.32	617	0.40	675	0.48	731	0.55	784	0.63	834	0.72	884	0.81	929	0.90	973	0.99	1016	1.09
4036	501	0.29	569	0.36	631	0.44	688	0.53	742	0.60	794	0.68	842	0.77	891	0.87	937	0.96	981	1.06	1022	1.15
4248	521	0.35	585	0.41	646	0.49	701	0.57	754	0.66	804	0.74	852	0.83	898	0.92	944	1.02	987	1.12	1028	1.22
4460	540	0.40	602	0.46	661	0.54	715	0.62	767	0.72	816	0.81	862	0.89	908	0.99	950	1.08	994	1.19	1036	1.30
4673	559	0.45	619	0.50	677	0.59	729	0.68	780	0.78	827	0.88	872	0.96	916	1.05	960	1.15	1001	1.26	1043	1.37
4885	579	0.50	636	0.54	692	0.65	744	0.74	793	0.84	840	0.95	885	1.04	928	1.13	969	1.23	1009	1.33	1049	1.45
5098	599	0.55	654	0.59	709	0.72	760	0.81	807	0.91	852	1.02	896	1.12	939	1.22	980	1.32	1019	1.42	1057	1.53
<b>External Static Pressure (Pascals)</b>																						
m <sup>3</sup> /hr	299		324		349																	
	RPM	kW	RPM	kW	RPM	kW																
	<b>1.5 kW Ultra High Static Motor</b>																					
3398	1040	1.03	1080	1.12	1116	1.20																
3611	1048	1.10	1085	1.19	1123	1.28																
3823	1054	1.18	1093	1.27	—	—																
4036	1062	1.25	1099	1.35	—	—																
4248	1068	1.33	1107	1.43	—	—																
4460	1075	1.40	1113	1.51	—	—																
4673	1083	1.49	—	—	—	—																
4885	1090	1.57	—	—	—	—																
5098	1097	1.65	—	—	—	—																

**Notes:**

1. Data includes pressure drop due to wet coil and 1" filter.
2. Fan motor heat (kW) = 1.238 x kW.
3. Factory supplied motors, in commercial equipment, are definite purpose motors, specifically designed and tested to operate reliably and continuously at all cataloged conditions. Using the full horsepower range of our fan motors as shown in our tabular data will not result in nuisance tripping or premature motor failure. Our product's warranty will not be affected.



## Performance Data

**Table 64. Evaporator fan performance – TWE101 – air handler (IP)**

External Static Pressure (Inches of Water Gauge)																								
		0.10"		0.20"		0.30"		0.40"		0.50"		0.60"		0.70"		0.80"		0.90"		1.00"		1.10"		
CFM	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP		
<b>1.5 HP Standard Motor</b>												<b>2 HP High Static Motor</b>												
2600	—	—	—	—	523	0.53	563	0.61	601	0.69	638	0.75	673	0.83	707	0.91	739	0.99	772	1.08	802	1.17		
2775	—	—	499	0.55	541	0.62	580	0.69	617	0.78	653	0.86	687	0.93	719	1.01	750	1.09	782	1.18	812	1.27		
2950	—	—	519	0.63	560	0.71	598	0.79	634	0.87	668	0.96	701	1.05	732	1.12	763	1.21	793	1.30	822	1.39		
3125	499	0.70	540	0.71	579	0.82	616	0.90	651	0.98	684	1.08	716	1.17	747	1.26	777	1.34	805	1.42	834	1.52		
3300	522	0.81	561	0.81	600	0.94	635	1.02	669	1.10	701	1.20	731	1.30	762	1.40	791	1.49	819	1.57	847	1.66		
3475	545	0.93	582	0.93	620	1.07	654	1.15	687	1.24	718	1.33	748	1.43	777	1.54	806	1.65	834	1.74	860	1.83		
3650	568	1.05	604	1.09	640	1.18	674	1.30	706	1.39	736	1.48	766	1.58	794	1.69	821	1.81	848	1.91	874	2.01		
3825	592	1.19	628	1.27	661	1.30	694	1.46	725	1.55	754	1.65	783	1.75	810	1.85	838	1.98	864	2.09	890	2.20		
4000	615	1.34	652	1.47	682	1.45	714	1.63	745	1.73	774	1.83	801	1.93	829	2.04	855	2.16	880	2.28	—	—		
<b>External Static Pressure (Inches of Water Gauge)</b>																								
		1.20"		1.30"		1.40"		1.50"		1.60"		1.70"		1.80"		1.90"								
CFM	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP						
<b>2 HP High Static Motor w/ Field Supplied Sheave &amp; Belt</b>																								
2600	832	1.25	860	1.34	887	1.43	914	1.52	939	1.6	964	1.69	988	1.77	1011	1.86								
2775	841	1.37	870	1.46	897	1.56	923	1.65	949	1.74	973	1.83	997	1.93	1020	2.02								
2950	851	1.49	879	1.59	906	1.69	932	1.79	958	1.89	983	1.99	1006	2.08	1030	2.18								
3125	861	1.61	889	1.72	916	1.82	943	1.93	967	2.04	992	2.14	1016	2.25	1040	2.36								
3300	873	1.76	900	1.86	926	1.97	951	2.08	977	2.19	1002	2.31	—	—	—	—								
3475	886	1.92	912	2.02	938	2.13	962	2.24	—	—	—	—	—	—	—	—								
3650	900	2.10	926	2.20	950	2.31	—	—	—	—	—	—	—	—	—	—								
3825	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—								
4000	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—								

**Notes:**

1. Data includes pressure drop due to wet coil and 1" filter.
2. Fan motor heat (MBh) = 3.15 x BHP.
3. Factory supplied motors, in commercial equipment, are definite purpose motors, specifically designed and tested to operate reliably and continuously at all cataloged conditions. Using the full horsepower range of our fan motors as shown in our tabular data will not result in nuisance tripping or premature motor failure. Our product's warranty will not be affected.

**Table 65. Evaporator fan performance – TWE101 – air handler (SI)**

External Static Pressure (Pascals)																						
m <sup>3</sup> /hr	25		50		75		100		125		150		174		199		224		249		274	
	RPM	kW	RPM	kW	RPM	kW	RPM	kW	RPM	kW	RPM	kW	RPM	kW	RPM	kW	RPM	kW	RPM	kW	RPM	kW
1.12 kW Standard Motor											1.12 kW High Static Motor											
4418	—	—	—	—	523	0.40	563	0.45	601	0.51	638	0.56	673	0.62	707	0.68	739	0.74	772	0.80	802	0.87
4715	—	—	499	0.41	541	0.46	580	0.52	617	0.58	653	0.64	687	0.69	719	0.75	750	0.81	782	0.88	812	0.95
5013	—	—	519	0.47	560	0.53	598	0.59	634	0.65	668	0.72	701	0.78	732	0.84	763	0.90	793	0.97	822	1.03
5310	499	0.52	540	0.53	579	0.61	616	0.67	651	0.73	684	0.80	716	0.88	747	0.94	777	1.00	805	1.06	834	1.13
5607	522	0.60	561	0.60	600	0.70	635	0.76	669	0.82	701	0.89	731	0.97	762	1.04	791	1.11	819	1.17	847	1.24
5905	545	0.69	582	0.70	620	0.80	654	0.86	687	0.92	718	0.99	748	1.07	777	1.15	806	1.23	834	1.30	860	1.36
6202	568	0.79	604	0.81	640	0.88	674	0.97	706	1.03	736	1.10	766	1.18	794	1.26	821	1.35	848	1.43	874	1.50
6499	592	0.89	628	0.95	661	0.97	694	1.09	725	1.16	754	1.23	783	1.30	810	1.38	838	1.47	864	1.56	890	1.64
6797	615	1.00	652	1.10	682	1.08	714	1.22	745	1.29	774	1.36	801	1.44	829	1.52	855	1.61	880	1.70	905	1.79
External Static Pressure (Pascals)																						
m <sup>3</sup> /hr	299		324		349		374		398		423		448		473							
	RPM	kW	RPM	kW	RPM	kW	RPM	kW	RPM	kW	RPM	kW	RPM	kW	RPM	kW						
1.12 kW High Static Motor w/ Field Supplied Sheave & Belt																						
4418	832	0.93	860	1.00	887	1.06	914	1.13	939	1.19	964	1.26	988	1.32	1011	1.39						
4715	841	1.02	870	1.09	897	1.16	923	1.23	949	1.30	973	1.37	997	1.44	1020	1.50						
5013	851	1.11	879	1.18	906	1.26	932	1.33	958	1.41	983	1.48	1006	1.55	1030	1.63						
5310	861	1.20	889	1.28	916	1.36	943	1.44	967	1.52	992	1.60	1016	1.68	1040	1.76						
5607	873	1.31	900	1.39	926	1.47	951	1.55	977	1.63	1002	1.72	—	—	—	—						
5905	886	1.43	912	1.51	938	1.59	962	1.67	986	1.75	—	—	—	—	—	—						
6202	900	1.57	926	1.64	950	1.72	975	1.81	998	1.89	—	—	—	—	—	—						
6499	915	1.72	939	1.79	963	1.87	987	1.95	1010	2.04	—	—	—	—	—	—						
6797	929	1.88	953	1.96	977	2.03	1000	2.11	1023	2.20	—	—	—	—	—	—						

**Notes:**

1. Data includes pressure drop due to wet coil and 1" filter.
2. Fan motor heat (kW) = 1.238 x kW.
3. Factory supplied motors, in commercial equipment, are definite purpose motors, specifically designed and tested to operate reliably and continuously at all cataloged conditions. Using the full horsepower range of our fan motors as shown in our tabular data will not result in nuisance tripping or premature motor failure. Our product's warranty will not be affected.



## Performance Data

**Table 66. Evaporator fan performance – TWE126 – air handler (IP)**

External Static Pressure (Inches of Water Gauge)																								
0.10"		0.20"		0.30"		0.40"		0.50"		0.60"		0.70"		0.80"		0.90"		1.00"		1.10"				
CFM	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP		
1.5 HP Standard Motor												1.5 HP Standard Motor w/ Field Supplied Sheave & Belt						2 HP High Static Motor						
3200	—	—	—	—	515	0.51	565	0.63	601	0.71	638	0.81	678	0.93	718	1.06	759	1.21	794	1.35	826	1.49		
3400	—	—	472	0.46	528	0.57	578	0.69	617	0.80	650	0.89	686	1.00	724	1.13	762	1.27	800	1.42	834	1.57		
3600	—	—	486	0.51	541	0.63	590	0.76	633	0.89	666	0.98	697	1.08	732	1.20	767	1.34	804	1.49	840	1.65		
3800	—	—	500	0.57	554	0.70	601	0.82	646	0.97	682	1.09	712	1.19	742	1.29	776	1.43	810	1.57	843	1.72		
4000	—	—	515	0.64	567	0.78	614	0.91	658	1.05	698	1.20	728	1.31	756	1.41	786	1.53	817	1.66	849	1.82		
4200	477	0.58	531	0.71	581	0.85	627	1.00	669	1.13	710	1.29	744	1.43	772	1.55	799	1.65	827	1.78	858	1.93		
4400	494	0.65	546	0.79	595	0.94	640	1.09	682	1.23	722	1.39	758	1.55	789	1.69	814	1.80	840	1.92	867	2.05		
4600	513	0.73	563	0.87	609	1.03	653	1.19	695	1.34	732	1.48	771	1.66	804	1.83	831	1.96	856	2.08	880	2.20		
4800	531	0.82	579	0.96	624	1.13	667	1.29	707	1.45	745	1.60	783	1.77	817	1.96	847	2.12	872	2.25	896	2.37		
External Static Pressure (Inches of Water Gauge)																								
1.20"		1.30"		1.40"		1.50"		1.60"		1.70"														
CFM	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP												
2 HP High Static Motor						3 HP Ultra High Static Motor																		
3200	857	1.63	887	1.78	916	1.93	943	2.08	970	2.23	996	2.39												
3400	865	1.72	895	1.88	924	2.03	952	2.19	978	2.35	1003	2.50												
3600	873	1.81	903	1.97	931	2.13	959	2.29	986	2.46	1012	2.62												
3800	877	1.89	912	2.08	940	2.24	967	2.41	994	2.58	—	—												
4000	882	1.98	915	2.16	947	2.34	976	2.53	1002	2.70	—	—												
4200	888	2.08	919	2.25	950	2.44	980	2.63	1010	2.82	—	—												
4400	896	2.20	925	2.37	955	2.55	985	2.73	1013	2.92	—	—												
4600	906	2.34	934	2.50	961	2.67	989	2.85	—	—	—	—												
4800	918	2.50	944	2.65	970	2.81	996	2.98	—	—	—	—												

**Notes:**

1. Data includes pressure drop due to wet coil and 1" filter.
2. Fan motor heat (MBh) = 3.15 x BHP.
3. Factory supplied motors, in commercial equipment, are definite purpose motors, specifically designed and tested to operate reliably and continuously at all cataloged conditions. Using the full horsepower range of our fan motors as shown in our tabular data will not result in nuisance tripping or premature motor failure. Our product's warranty will not be affected.



**Table 67. Evaporator fan performance – TWE126 – air handler (SI)**

External Static Pressure (Pascals)																						
m <sup>3</sup> /hr	25		50		75		100		125		150		174		199		224		249		274	
	RPM	kW	RPM	kW	RPM	kW	RPM	kW	RPM	kW	RPM	kW	RPM	kW	RPM	kW	RPM	kW	RPM	kW	RPM	kW
	1.12 kW Standard Motor										1.12 kW Standard Motor w/ Field Supplied Sheave & Belt						1.49 kW High Static Motor					
5437	—	—	—	—	515	0.38	565	0.47	601	0.53	638	0.60	678	0.69	718	0.79	759	0.90	794	1.01	826	1.11
5777	—	—	472	0.34	528	0.42	578	0.52	617	0.60	650	0.66	686	0.74	724	0.84	762	0.94	800	1.06	834	1.17
6117	—	—	486	0.38	541	0.47	590	0.56	633	0.66	666	0.73	697	0.81	732	0.90	767	1.00	804	1.11	840	1.23
6457	—	—	500	0.43	554	0.52	601	0.61	646	0.72	682	0.81	712	0.89	742	0.97	776	1.06	810	1.17	843	1.29
6797	—	—	515	0.48	567	0.58	614	0.68	658	0.78	698	0.89	728	0.98	756	1.05	786	1.14	817	1.24	849	1.35
7137	477	0.43	531	0.53	581	0.64	627	0.74	669	0.84	710	0.96	744	1.07	772	1.15	799	1.23	827	1.33	858	1.44
7476	494	0.48	546	0.59	595	0.70	640	0.81	682	0.92	722	1.03	758	1.16	789	1.26	814	1.34	840	1.43	867	1.53
7816	513	0.54	563	0.65	609	0.77	653	0.88	695	1.00	732	1.10	771	1.24	804	1.36	831	1.46	856	1.55	880	1.64
8156	531	0.61	579	0.72	624	0.84	667	0.96	707	1.08	745	1.19	783	1.32	817	1.46	847	1.58	872	1.68	896	1.77
External Static Pressure (Pascals)																						
m <sup>3</sup> /hr	299		324		349		374		398		423											
	RPM	kW	RPM	kW	RPM	kW	RPM	kW	RPM	kW	RPM	kW										
	1.49 kW High Static Motor				2.24 kW Ultra High Static Motor																	
5437	857	1.22	887	1.33	916	1.44	943	1.55	970	1.66	996	1.78										
5777	865	1.29	895	1.40	924	1.51	952	1.63	978	1.75	1003	1.87										
6117	873	1.35	903	1.47	931	1.59	959	1.71	986	1.83	1012	1.96										
6457	877	1.41	912	1.55	940	1.67	967	1.80	994	1.92	—	—										
6797	882	1.48	915	1.61	947	1.75	976	1.88	1002	2.01	—	—										
7137	888	1.55	919	1.68	950	1.82	980	1.96	1010	2.11	—	—										
7476	896	1.64	925	1.76	955	1.90	985	2.04	1013	2.18	—	—										
7816	906	1.74	934	1.86	961	1.99	989	2.12	—	—	—	—										
8156	918	1.86	944	1.97	970	2.10	996	2.22	—	—	—	—										

**Notes:**

1. Data includes pressure drop due to wet coil and 1" filter.
2. Fan motor heat (kW) = 1.238 x kW.
3. Factory supplied motors, in commercial equipment, are definite purpose motors, specifically designed and tested to operate reliably and continuously at all cataloged conditions. Using the full horsepower range of our fan motors as shown in our tabular data will not result in nuisance tripping or premature motor failure. Our product's warranty will not be affected.



## Performance Data

**Table 68. Evaporator fan performance – TWE156 – air handler (IP)**

External Static Pressure (Inches of Water Gauge)																							
		0.10"		0.20"		0.30"		0.40"		0.50"		0.60"		0.70"		0.80"		0.90"		1.00"		1.10"	
CFM	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	
2 HP Standard Motor w/ Field Supplied Sheave & Belt											1.5 HP Standard Motor w/ Field Supplied Sheave & Belt						2 HP High Static Motor						
4000	428	0.5	482	0.62	531	0.72	576	0.84	621	0.98	663	1.11	701	1.25	737	1.38	771	1.51	803	1.64	833	1.77	
4250	448	0.58	499	0.71	546	0.82	590	0.94	633	1.08	674	1.22	712	1.37	748	1.51	782	1.65	814	1.79	845	1.93	
4500	468	0.68	517	0.81	563	0.93	605	1.05	646	1.19	686	1.34	724	1.50	760	1.65	793	1.80	825	1.95	855	2.09	
4750	488	0.78	535	0.91	579	1.06	621	1.18	660	1.32	698	1.46	735	1.63	772	1.79	805	1.95	837	2.11	867	2.27	
5000	509	0.90	554	1.03	596	1.19	637	1.32	675	1.46	712	1.61	748	1.77	783	1.94	817	2.11	848	2.28	878	2.44	
5250	530	1.02	573	1.16	614	1.32	653	1.47	691	1.61	726	1.76	760	1.92	795	2.10	828	2.28	859	2.45	890	2.64	
5500	551	1.16	593	1.31	632	1.47	670	1.64	706	1.78	741	1.93	774	2.09	807	2.26	840	2.46	871	2.64	902	2.83	
5750	572	1.32	612	1.47	651	1.63	687	1.81	722	1.97	757	2.12	789	2.28	821	2.45	852	2.64	883	2.84	912	3.03	
6000	593	1.48	632	1.64	670	1.81	705	1.99	739	2.17	772	2.32	804	2.48	835	2.66	865	2.84	895	3.04	924	3.24	

External Static Pressure (Inches of Water Gauge)													
		1.20"		1.30"		1.40"		1.50"		1.60"		1.70"	
CFM	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	
2 HP High Static Motor						3 HP Ultra High Static Motor							
4000	863	1.9	891	2.03	919	2.15	944	2.28	970	2.40	994	2.53	
4250	874	2.07	902	2.20	928	2.33	955	2.47	981	2.61	1004	2.74	
4500	884	2.24	913	2.38	939	2.53	966	2.68	991	2.82	1015	2.96	
4750	895	2.42	924	2.58	951	2.74	977	2.88	1002	3.04	—	—	
5000	907	2.61	934	2.77	962	2.94	—	—	—	—	—	—	
5250	918	2.81	946	2.98	973	3.16	—	—	—	—	—	—	
5500	931	3.02	958	3.20	—	—	—	—	—	—	—	—	
5750	941	3.23	—	—	—	—	—	—	—	—	—	—	
6000	—	—	—	—	—	—	—	—	—	—	—	—	

**Notes:**

1. Data includes pressure drop due to wet coil and 1" filter.
2. Fan motor heat (MBh) = 3.15 x BHP.
3. Factory supplied motors, in commercial equipment, are definite purpose motors, specifically designed and tested to operate reliably and continuously at all cataloged conditions. Using the full horsepower range of our fan motors as shown in our tabular data will not result in nuisance tripping or premature motor failure. Our product's warranty will not be affected.

**Table 69. Evaporator fan performance – TWE156 – air handler (SI)**

External Static Pressure (Pascals)																						
m <sup>3</sup> /hr	25		50		75		100		125		150		174		199		224		249		274	
	RPM	kW	RPM	kW	RPM	kW	RPM	kW	RPM	kW	RPM	kW	RPM	kW	RPM	kW	RPM	kW	RPM	kW	RPM	kW
	<b>1.49 kW Standard Motor w/ Field Supplied Sheave &amp; Belt</b>						<b>1.49 kW Standard Motor</b>						<b>2.24 kW High Static Motor</b>									
6797	428	0.37	482	0.46	531	0.54	576	0.63	621	0.73	663	0.83	701	0.93	737	1.03	771	1.13	803	1.22	833	1.32
7222	448	0.43	499	0.53	546	0.61	590	0.70	633	0.80	674	0.91	712	1.02	748	1.13	782	1.23	814	1.33	845	1.44
7646	468	0.50	517	0.60	563	0.70	605	0.79	646	0.89	686	1.00	724	1.12	760	1.23	793	1.34	825	1.45	855	1.56
8071	488	0.58	535	0.68	579	0.79	621	0.88	660	0.98	698	1.09	735	1.21	772	1.34	805	1.46	837	1.57	867	1.69
8496	509	0.67	554	0.77	596	0.88	637	0.99	675	1.09	712	1.20	748	1.32	783	1.45	817	1.58	848	1.70	878	1.82
8921	530	0.76	573	0.87	614	0.99	653	1.10	691	1.20	726	1.31	760	1.43	795	1.57	828	1.70	859	1.83	890	1.97
9346	551	0.87	593	0.97	632	1.10	670	1.22	706	1.33	741	1.44	774	1.56	807	1.69	840	1.83	871	1.97	902	2.11
9770	572	0.98	612	1.09	651	1.22	687	1.35	722	1.47	757	1.58	789	1.70	821	1.83	852	1.97	883	2.11	912	2.26
10195	593	1.11	632	1.22	670	1.35	705	1.49	739	1.61	772	1.73	804	1.85	835	1.98	865	2.12	895	2.27	924	2.42
External Static Pressure (Pascals)																						
m <sup>3</sup> /hr	299		324		349		374		398		423											
	RPM	kW	RPM	kW	RPM	kW	RPM	kW	RPM	kW	RPM	kW										
	<b>2.24 kW High Static Motor w/ Field Supplied Sheave &amp; Belt</b>																					
6797	863	1.42	891	1.51	919	1.61	944	1.70	970	1.79	994	1.88										
7222	874	1.54	902	1.64	928	1.74	955	1.84	981	1.95	1004	2.04										
7646	884	1.67	913	1.78	939	1.88	966	2.00	991	2.10	1015	2.21										
8071	895	1.80	924	1.92	951	2.04	977	2.15	1002	2.26	—	—										
8496	907	1.95	934	2.07	962	2.19	—	—	—	—	—	—										
8921	918	2.09	946	2.22	973	2.35	—	—	—	—	—	—										
9346	931	2.25	958	2.39	—	—	—	—	—	—	—	—										
9770	941	2.41	—	—	—	—	—	—	—	—	—	—										
10195	—	—	—	—	—	—	—	—	—	—	—	—										

**Notes:**

1. Data includes pressure drop due to wet coil and 1" filter.
2. Fan motor heat (kW) = 1.238 x kW.
3. Factory supplied motors, in commercial equipment, are definite purpose motors, specifically designed and tested to operate reliably and continuously at all cataloged conditions. Using the full horsepower range of our fan motors as shown in our tabular data will not result in nuisance tripping or premature motor failure. Our product's warranty will not be affected.



## Performance Data

Table 70. Evaporator fan performance – TWE201 – air handler (IP)

External Static Pressure (Inches of Water Gauge)																									
0.10"		0.20"		0.30"		0.40"		0.50"		0.60"		0.70"		0.80"		0.90"		1.00"		1.10"					
CFM	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP			
																			<b>2 HP Low Static Motor</b>		<b>3 HP Standard Motor</b>			<b>3 HP Standard Motor w/ Field Supplied Sheave &amp; Belt</b>	
5200	—	—	531	0.83	580	0.96	627	1.09	666	1.21	707	1.37	748	1.54	787	1.71	825	1.88	864	2.06	902	2.24			
5525	—	—	551	0.96	599	1.10	644	1.23	684	1.37	722	1.51	760	1.68	799	1.87	834	2.04	872	2.23	909	2.42			
5850	—	—	572	1.10	619	1.25	662	1.39	703	1.54	738	1.68	774	1.84	810	2.02	846	2.22	880	2.40	916	2.60			
6175	543	1.11	593	1.26	638	1.42	680	1.57	720	1.72	757	1.87	790	2.02	824	2.20	859	2.40	893	2.61	926	2.81			
6500	566	1.28	614	1.43	659	1.61	699	1.77	737	1.92	775	2.08	807	2.24	839	2.40	871	2.59	904	2.80	936	3.02			
6825	590	1.47	636	1.62	679	1.80	718	1.98	755	2.14	792	2.31	826	2.48	857	2.64	886	2.81	918	3.02	950	3.25			
7150	614	1.67	658	1.83	700	2.02	738	2.21	774	2.38	809	2.55	844	2.73	875	2.90	903	3.07	932	3.26	962	3.47			
7475	638	1.89	680	2.06	720	2.25	758	2.45	794	2.63	827	2.81	861	2.99	893	3.18	921	3.36	949	3.54	976	3.73			
7800	662	2.13	702	2.31	742	2.50	779	2.71	814	2.91	846	3.09	879	3.28	910	3.48	940	3.67	967	3.86	993	4.04			
External Static Pressure (Inches of Water Gauge)																									
1.20"		1.30"		1.40"		1.50"		1.60"		1.70"		1.80"		1.90"											
CFM	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP									
<b>3 HP Standard Motor w/ Field Supplied Sheave &amp; Belt</b>		<b>5 HP Ultra High Static Motor</b>						<b>5 HP Ultra High Static Motor w/ Field Supplied Sheave &amp; Belt</b>																	
5200	937	2.42	972	2.59	1004	2.77	1036	2.95	1066	3.12	1095	3.29	1125	3.46	1152	3.63									
5525	943	2.60	978	2.80	1012	2.99	1042	3.17	1072	3.35	1102	3.54	1132	3.73	1159	3.91									
5850	951	2.80	984	3.00	1018	3.21	1050	3.41	1080	3.60	1109	3.80	1138	4.00	1166	4.19									
6175	958	3.00	992	3.22	1024	3.43	1056	3.64	1086	3.86	1115	4.06	1143	4.27	—	—									
6500	967	3.22	998	3.44	1030	3.65	1063	3.89	1093	4.11	1122	4.33	1151	4.56	—	—									
6825	980	3.47	1010	3.69	1039	3.90	1069	4.13	1098	4.36	1129	4.61	1158	4.85	—	—									
7150	991	3.70	1021	3.94	1051	4.18	1078	4.41	1107	4.65	1135	4.88	1165	5.14	—	—									
7475	1005	3.97	1034	4.21	1062	4.46	1090	4.71	1117	4.94	1144	5.19	—	—	—	—									
7800	1019	4.24	1047	4.49	1074	4.74	1102	5.01	1128	5.25	1154	5.51	—	—	—	—									

**Notes:**

1. Data includes pressure drop due to wet coil and 1" filter.
2. Fan motor heat (MBh) = 3.15 x BHP.
3. Factory supplied motors, in commercial equipment, are definite purpose motors, specifically designed and tested to operate reliably and continuously at all cataloged conditions. Using the full horsepower range of our fan motors as shown in our tabular data will not result in nuisance tripping or premature motor failure. Our product's warranty will not be affected.

**Table 71. Evaporator fan performance – TWE201 – air handler (SI)**

External Static Pressure (Pascals)																						
m <sup>3</sup> /hr	25		50		75		100		125		150		174		199		224		249		274	
	RPM	kW	RPM	kW	RPM	kW	RPM	kW	RPM	kW	RPM	kW	RPM	kW	RPM	kW	RPM	kW	RPM	kW	RPM	kW
	1.49 kW Low Static Motor											2.24 kW Standard Motor						2.24 kW Standard Motor w/ Field Supplied Sheave & Belt				
8836	—	—	531	0.62	580	0.71	627	0.81	666	0.90	707	1.02	748	1.15	787	1.27	825	1.40	864	1.54	902	1.67
9388	—	—	551	0.72	599	0.82	644	0.92	684	1.02	722	1.12	760	1.25	799	1.39	834	1.52	872	1.66	909	1.80
9940	—	—	572	0.82	619	0.94	662	1.04	703	1.15	738	1.25	774	1.37	810	1.51	846	1.65	880	1.79	916	1.94
10493	543	0.83	593	0.94	638	1.06	680	1.17	720	1.29	757	1.40	790	1.51	824	1.64	859	1.79	893	1.94	926	2.09
11045	566	0.95	614	1.07	659	1.20	699	1.32	737	1.43	775	1.55	807	1.67	839	1.79	871	1.93	904	2.09	936	2.25
11597	590	1.09	636	1.21	679	1.34	718	1.48	755	1.59	792	1.72	826	1.85	857	1.97	886	2.09	918	2.25	950	2.42
12149	614	1.25	658	1.37	700	1.50	738	1.65	774	1.77	809	1.90	844	2.03	875	2.16	903	2.29	932	2.43	962	2.59
12702	638	1.41	680	1.54	720	1.68	758	1.83	794	1.96	827	2.09	861	2.23	893	2.37	921	2.51	949	2.64	976	2.79
13254	662	1.59	702	1.72	742	1.86	779	2.02	814	2.17	846	2.31	879	2.45	910	2.59	940	2.74	967	2.88	993	3.02
External Static Pressure (Pascals)																						
m <sup>3</sup> /hr	299		324		349		374		398		423		448									
	RPM	kW	RPM	kW	RPM	kW	RPM	kW	RPM	kW	RPM	kW	RPM	kW								
	3.73 kW Ultra High Static Motor				3.73 kW Ultra High Static Motor w/ Field Supplied Sheave & Belt																	
8836	937	1.80	972	1.94	1004	2.07	1036	2.20	1066	2.33	1095	2.45	1125	2.58								
9388	943	1.94	978	2.09	1012	2.23	1042	2.36	1072	2.50	1102	2.64	1132	2.78								
9940	951	2.09	984	2.24	1018	2.39	1050	2.54	1080	2.69	1109	2.83	—	—								
10493	958	2.24	992	2.40	1024	2.56	1056	2.72	1086	2.88	1115	3.03	—	—								
11045	967	2.40	998	2.56	1030	2.73	1063	2.90	1093	3.07	1122	3.23	—	—								
11597	980	2.59	1010	2.75	1039	2.91	1069	3.08	1098	3.26	1129	3.44	—	—								
12149	991	2.76	1021	2.94	1051	3.12	1078	3.29	1107	3.47	—	—	—	—								
12702	1005	2.96	1034	3.14	1062	3.32	1090	3.51	1117	3.69	—	—	—	—								
13254	1019	3.17	1047	3.35	1074	3.54	1102	3.74	1128	3.92	—	—	—	—								

**Notes:**

1. Data includes pressure drop due to wet coil and 1" filter.
2. Fan motor heat (kW) = 1.238 x kW.
3. Factory supplied motors, in commercial equipment, are definite purpose motors, specifically designed and tested to operate reliably and continuously at all cataloged conditions. Using the full horsepower range of our fan motors as shown in our tabular data will not result in nuisance tripping or premature motor failure. Our product's warranty will not be affected.



## Performance Data

**Table 72. Low static fan motors - standard air handlers**

Model	Motor	Motor Sheave Turns Open	Nominal RPM	Required Field Supplied Components		
				Motor Sheave	Blower Sheave	Belt
TWE156	Standard Motor with Field Supplied Components 2 HP (1.5 kW)	0	541	Variable Pitch (2.4 - 3.4 Inch Pitch Diameter), 0.875 Inch Bore, Single Groove, Browning 1VL40	Fixed Pitch (9.5 Inch Pitch Diameter), 1.4375 Inch Bore, Single Groove, Browning BK105	Browning AX59
		1	511			
		2	464			
		3	417			
		4	370			
5	391					
TWE201	Low Static Motor 2 HP (1.5 kW)	0	712	N/A	N/A	N/A
		1	677			
		2	641			
		3	605			
		4	569			
5	533					

**Table 73. Standard fan motors - standard air handlers**

Model	Motor	Motor Sheave Turns Open	Nominal RPM	Required Field Supplied Components		
				Motor Sheave	Blower Sheave	Belt
TWE051	Standard Motor .5 HP (.38 kW)	0	892	N/A	N/A	N/A
		1	833			
		2	773			
		3	714			
		4	654			
5	595					
TWE072	Standard Motor 1 HP (.75 kW)	0	706	N/A	N/A	N/A
		1	659			
		2	612			
		3	565			
		4	518			
5	471					
TWE076	Standard Motor 1 HP (.75 kW)	0	706	N/A	N/A	N/A
		1	659			
		2	612			
		3	565			
		4	518			
5	471					
TWE101	Standard Motor 1.5 HP (1.13 kW)	0	682	N/A	N/A	N/A
		1	644			
		2	606			
		3	568			
		4	530			
5	492					
TWE126	Standard Motor 1.5 HP (1.13 kW)	0	640	N/A	N/A	N/A
		1	604			
		2	569			
		3	533			
		4	498			
5	462					
TWE156	Standard Motor 2 HP (1.5 kW)	0	704	N/A	N/A	N/A
		1	676			
		2	648			
		3	620			
		4	592			
		5	565			
6	537					

**Table 73. Standard fan motors - standard air handlers (continued)**

Model	Motor	Motor Sheave Turns Open	Nominal RPM	Required Field Supplied Components		
				Motor Sheave	Blower Sheave	Belt
TWE201	Standard Motor 3 HP (2.25 kW)	0	805	N/A	N/A	N/A
		1	777			
		2	749			
		3	721			
		4	693			
		5	665			
6	637					

**Table 74. High static fan motors - standard air handlers**

Model	Motor	Motor Sheave Turns Open	Nominal RPM	Required Field Supplied Components		
				Motor Sheave	Blower Sheave	Belt
TWE051	High Static Motor 1 HP (.75kW)	0	1122	N/A	N/A	N/A
		1	1066			
		2	1010			
		3	954			
		4	898			
TWE072	High Static Motor 1.5 HP (1.13 kW)	0	912	N/A	N/A	N/A
		1	866			
		2	820			
		3	775			
		4	729			
TWE076	High Static Motor 1.5 HP (1.13 kW)	0	912	N/A	N/A	N/A
		1	866			
		2	820			
		3	775			
		4	729			
TWE101	High Static Motor 2 HP (1.5 kW)	0	810	N/A	N/A	N/A
		1	769			
		2	729			
		3	688			
		4	648			
TWE101	High Static Motor with Field Supplied Components 2 HP (1.5 kW)	0	941	Variable Pitch (2.8 - 3.8 Inch Pitch Diameter), 0.875 Inch Bore, Single Groove, Browning 1VP44	Fixed Pitch (6.0 Inch Pitch Diameter), 1.0 Inch Bore, Single Groove, Browning AK64	Browning A50
		1	894			
		2	847			
		3	800			
		4	753			
TWE126	Standard Motor with Field Supplied Components 1.5 HP (1.13 kW)	0	761	Variable Pitch (2.4 - 3.4 Inch Pitch Diameter), 0.875 Inch Bore, Single Groove, Browning 1VL40	Fixed Pitch (6.7 Inch Pitch Diameter), 1.4375 Inch Bore, Single Groove, Browning AK71	Browning A55
		1	718			
		2	671			
		3	624			
		4	577			
TWE126	High Static Motor 2 HP (1.5 kW)	0	912	N/A	N/A	N/A
		1	866			
		2	825			
		3	785			
		4	744			
5	683					



## Performance Data

**Table 74. High static fan motors - standard air handlers (continued)**

Model	Motor	Motor Sheave Turns Open	Nominal RPM	Required Field Supplied Components		
				Motor Sheave	Blower Sheave	Belt
TWE156	High Static Motor 3.5 HP (2.6 kW)	0	853	N/A	N/A	N/A
		1	824			
		2	794			
		3	765			
		4	735			
		5	705			
		6	676			
TWE156	High Static Motor with Field Supplied Components 3.5 HP (2.6 kW)	0	1014	Variable Pitch (3.4 - 4.4 Inch Pitch Diameter), 1.125 Inch Bore, Single Groove, Browning 1VP50	Fixed Pitch (6.6 Inch Pitch Diameter), 1.4375 Inch Bore, Single Groove, Browning BK72	Browning BX58
		1	979			
		2	932			
		3	885			
		4	838			
		5	803			
		6	803			
TWE201	Standard Motor with Field Supplied Components 3 HP (2.25 kW)	0	909	Variable Pitch (2.8 - 3.8 Inch Pitch Diameter), 1.125 Inch Bore, Single Groove, Browning 1VP50	Fixed Pitch (10.4 Inch Pitch Diameter), 1.4375 Inch Bore, Single Groove, Browning BK80	Browning BX62
		1	878			
		2	846			
		3	815			
		4	783			
		5	751			
		6	720			

**Table 75. Ultra high static fan motors - standard air handlers**

Model	Motor	Motor Sheave Turns Open	Nominal RPM	Required Field Supplied Components		
				Motor Sheave	Blower Sheave	Belt
TWE072	Ultra High Static Motor 2 HP (1.5 kW)	0	1122	N/A	N/A	N/A
		1	1034			
		2	946			
		3	859			
		4	771			
		5	683			
		—	—			
TWE076	Ultra High Static Motor 2 HP (1.5 kW)	0	1122	N/A	N/A	N/A
		1	1034			
		2	946			
		3	859			
		4	771			
		5	683			
		—	—			
TWE126	Ultra High Static Motor 3.5 HP (2.6 kW)	0	1014	N/A	N/A	N/A
		1	979			
		2	944			
		3	909			
		4	874			
		5	838			
		6	803			
TWE201	Ultra High Static Motor 5 HP (3.75 kW)	0	1078	N/A	N/A	N/A
		1	1036			
		2	993			
		3	950			
		4	907			
		5	864			
		6	822			



**Table 75. Ultra high static fan motors - standard air handlers (continued)**

Model	Motor	Motor Sheave Turns Open	Nominal RPM	Required Field Supplied Components		
				Motor Sheave	Blower Sheave	Belt
TWE201	Ultra High Static Motor with Field Supplied Components 5 HP (3.75 kW)	0	1096	Variable Pitch (2.8 - 3.8 Inch Pitch Diameter), 1.125 Inch Bore, Single Groove, Browning 1VP44	Fixed Pitch (10.4 Inch Pitch Diameter), 1.4375 Inch Bore, Single Groove, Browning BK110	Browning BX62
		1	1067			
		2	1036			
		3	1004			
		4	973			
		5	941			
6	926					

**Table 76. Discharge plenum and grille assembly throw distance – air handler – ft (m)**

Unit Model No.	CFM	m <sup>3</sup> /h	Louver angle Deflection Position (ft)				Louver angle Deflection Position (m)			
			Straight	20°	40°	55°	Straight	20°	40°	55°
TWE051	1800	3060	46	37	29	22	14.0	11.3	8.8	6.7
	2000	3395	48	43	33	24	14.6	13.1	10.1	7.3
	2200	3737	51	50	36	25	15.5	15.2	11.0	7.6
	2400	4074	44	58	41	28	13.4	17.7	12.5	8.5
TWE072	1800	3061	47	34	28	24	14.0	10.3	8.3	8.0
	2000	3400	49	37	30	26	14.7	11.2	9.0	8.3
	2200	3739	50	40	32	28	15.3	12.2	9.8	8.5
	2400	4078	52	43	35	29	15.9	13.1	10.6	8.8
TWE076	2250	3823	51	41	33	28	15.4	12.4	10.0	8.6
	2500	4249	53	45	36	30	16.2	13.6	10.9	9.0
	2750	4671	56	49	39	31	16.9	14.9	11.9	9.4
	3000	5098	58	53	42	32	17.7	16.2	12.8	9.9
TWE101	3025	5139	57	44	36	32	17.4	13.4	10.8	9.6
	3350	5692	60	48	39	32	18.3	14.7	12.0	9.7
	3675	6245	63	52	43	33	19.3	16.0	13.2	10.0
	4000	6795	67	57	47	35	20.3	17.3	14.4	10.5
TWE126	3750	6370	44	27	25	38	13.4	8.1	7.5	11.7
	4200	7137	45	31	28	48	13.7	9.5	8.5	14.5
	4650	7902	47	36	31	57	14.3	10.9	9.5	17.4
	5100	8666	50	40	34	67	15.2	12.3	10.5	20.5
TWE156	4500	7644	46	34	30	22	14.1	10.5	9.2	6.6
	5000	8497	49	39	34	25	14.9	12.0	10.3	7.6
	5500	9346	53	45	37	28	16.2	13.6	11.4	8.5
	6000	10195	58	50	41	31	17.7	15.1	12.5	9.3
TWE201	6000	10195	53	43	36	28	16.0	13.1	10.9	8.6
	6680	11348	57	48	40	31	17.5	14.5	12.1	9.4
	7350	12488	62	52	44	33	18.8	16.0	13.3	10.0
	8030	13645	65	57	47	35	19.8	17.4	14.5	10.5

**Note:** Throw distance values are based on a terminal velocity of 75 fpm (0.38 m/s). Throw distance values at other terminal velocities may be established by multiplying throw distances in table above by throw factor as follows: for 50 FPM (0.25 m/s) terminal velocity, multiply by 1.50 throw factor; for 100 FPM (0.51 m/s) terminal velocity, multiply by 0.75 throw factor; for 150 FPM (0.76 m/s) terminal velocity, multiply by 0.50 throw factor.



## Performance Data

**Table 77. Static pressure drop through accessories (inches if water column) — air handler**

Unit Model No.	CFM	m <sup>3</sup> /h	Return Grille		Discharge Plenum & Grille		Electric Heaters (kW)							
			in. wc Pascal		in. wc Pascal		5-10		15-20		25-30		35-50	
			in. wc	Pascal	in. wc	Pascal	in. wc	Pascal	in. wc	Pascal	in. wc	Pascal	in. wc	Pascal
TWE051	1400	2379	0.09	23.60	0.16	41.10	0.06	16.20	0.05	13.70	0.09	23.60	—	—
	1700	2889	0.14	34.90	0.24	60.60	0.09	23.90	0.08	20.20	0.14	34.90	—	—
	2000	3398	0.18	45.70	0.33	83.80	0.13	33.00	0.13	33.00	0.19	48.30	—	—
TWE072	1600	2718	0.03	9.51	0.11	28.91	0.03	7.47	0.03	7.47	0.06	14.94	0.06	14.94
	2000	3398	0.04	14.70	0.18	45.20	0.03	7.47	0.05	12.45	0.08	19.93	0.10	24.91
	2400	4078	0.06	21.11	0.26	65.07	0.04	9.96	0.07	17.44	0.11	27.40	0.15	37.36
TWE076	2000	3398	0.06	14.70	0.18	45.20	0.03	6.80	0.05	13.50	0.08	19.20	0.10	26.00
	2500	4248	0.09	22.90	0.28	70.60	0.04	10.60	0.08	21.20	0.12	30.00	0.16	40.60
	3000	5098	0.13	33.00	0.40	101.60	0.06	15.20	0.12	30.50	0.17	43.20	0.23	58.40
TWE101	2600	4418	0.05	11.70	0.28	72.10	0.04	10.10	0.09	21.80	0.13	31.90	0.17	43.60
	3300	5607	0.07	18.90	0.46	116.20	0.06	16.20	0.14	35.10	0.20	51.30	0.28	70.20
	4000	6797	0.11	27.80	0.67	170.70	0.09	23.80	0.20	51.60	0.30	75.40	0.41	103.20
TWE126	3200	5436	0.04	10.20	0.10	25.60	0.01	2.50	0.02	5.00	0.03	7.50	0.04	10.00
	4000	6797	0.06	15.90	0.16	39.90	0.02	5.00	0.03	7.50	0.04	10.00	0.06	15.00
	4800	8156	0.09	22.90	0.23	57.50	0.03	7.50	0.03	7.50	0.06	15.00	0.08	20.00
TWE156	4000	6797	0.07	16.90	0.15	38.40	0.02	3.80	0.03	6.80	0.05	13.50	0.08	19.20
	5000	8496	0.10	26.50	0.24	60.00	0.04	10.60	0.04	10.60	0.08	21.20	0.12	30.00
	6000	10195	0.15	38.10	0.34	86.40	0.06	15.20	0.06	15.20	0.12	30.50	0.17	43.20
TWE201	5200	8836	0.07	18.40	0.30	73.80	0.04	10.60	0.04	10.60	0.08	21.10	0.13	31.70
	6650	11300	0.12	30.20	0.46	114.90	0.07	17.30	0.07	17.30	0.14	34.50	0.21	51.80
	7800	13254	0.16	41.50	0.63	156.10	0.10	23.80	0.10	23.80	0.19	47.50	0.29	71.30

**Notes:**

1. Return air filter ESP included in Fan Performance Table data.
2. On discharge plenum and grille - at louver opening angle of 42 degrees. For ESP at other angle openings, see accessory installation instruction.

**Table 78. Auxiliary electric heat capacity — air handler**

Unit Model No.	Total kW	No. of Stages	Stage 1		Stage 2		Total	
			kW Input	Btu Output	kW Input	Btu Output	kW Input	Btu Output
TWE0514DA, 0724DB, 0764DA/B, 1014DA/B	5.00	1	5.00	17,065	—	—	5.00	17,065
	9.96	1	9.96	33,993	—	—	9.96	33,993
	14.96	1	14.96	51,058	—	—	14.96	51,058
	24.92	2	14.96	51,058	9.96	33,993	24.92	85,051
TWE0724DB, 0764DA/B, 1014DA/B	34.88	2	19.92	67,987	14.96	51,058	34.88	119,045
TWE1264DB, 1564DB, 2014DB	10.00	1	10.00	34,130	—	—	10.00	34,130
	19.92	1	19.92	67,987	—	—	19.92	67,987
	29.92	2	19.92	67,987	10.00	34,130	29.92	102,117
	49.84	2	29.92	102,117	19.92	67,987	49.84	170,104

**Note:** Heaters are rated at 240V, 480V and 600V. For other than rated voltage, capacity = (Voltage/Related Voltage)<sup>2</sup> x Rated Capacity




# Controls

## ReliaTel


Zone Sensors are the building occupant's comfort control devices. Zone sensors are required for SZVAV applications. The following zone sensor options are available for units with ReliaTel control.

**Manual Changeover (BAYSENS106\*)**




Heat, Cool or Off System Switch. Fan Auto or Off Switch. One temperature setpoint lever.

**Manual/Automatic Changeover (BAYSENS108\*)**




Auto, Heat, Cool or Off System Switch. Fan Auto or Off Switch. Two temperature setpoint levers.

**Manual/Automatic Changeover (BAYSENS110\*)**




Auto, Heat, Cool or Off System Switch. Fan Auto or Off Switch. Two temperature setpoint levers. Status Indication LED lights, System On, Heat, Cool, or Service.

**Integrated Comfort™ System (BAYSENS074\*)**




Sensor(s) available with optional temperature adjustment and override buttons to provide central control through a Trane Integrated Comfort™ system.

**Remote Sensor (BAYSENS077\*)**




Sensor(s) available for all zone sensors to provide remote sensing capabilities.

**Wireless Zone Sensor (BAYSENS050\*)**



LCD display that provides heat, cool, auto or off. Includes two temperature setpoints and a lockable setting with °F or °C indicators.

**Programmable Night Setback (BAYSENS119\*)**




Auto or manual changeover with seven-day programming. Keyboard selection of Heat, Cool, Fan, Auto, EM Heat or On. All sensors have System On, Heat, Cool, Service LED/ indicators as standard. Night Setback Sensors have one (1) Occupied, one (1) Un-occupied, and one (1) Override program per day.

## Electromechanical


### Non-Programmable Thermostats

TCONT200\*\*\* (1H/1C)




Auto-changeover Backlit Display & Keys Filter Reminder Keypad Lock

TCONT401\*\*\* (2H/1C)



Auto-changeover Backlit Display & Keys Filter Reminder Keypad Lock  
Outdoor Temp Sensor Available

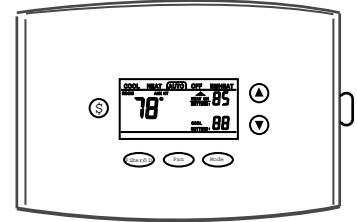
TCONT402\*\*\* (3H/2C)



Auto-changeover Backlit Display & Keys Filter Reminder Keypad Lock  
Outdoor Temp Sensor Included


### Programmable Thermostats

TCONT600\*\*\* (1H/1C)




5/2 or 5/1/1 Programming Actual and Setpoint temps displayed simultaneously

TCONT602\*\*\* (2H/2C)




5/2 or 5/1/1 Programming Actual and Setpoint temps displayed simultaneously

TCONT800\*\*\* (1H/1C)




Interactive touchscreen Large display Real time clock

TCONT802\*\*\* (3H/2C)



Interactive touchscreen Large display Real time clock

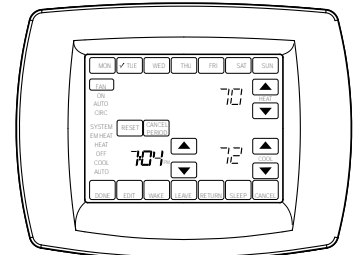TCONT803\*\*\* (3H/2C)



Interactive touchscreen Large display Real time clock Built-in humidity sensor

**Notes:**

- All thermostats may be used with ReliaTel units.
- Thermostats may be used with ReliaTel-equipped Cooling units, but only when matched with Standard Air Handlers (SZVAV Air Handlers excluded).



# Electrical Data

## Heat Pump Condenser

Table 79. Electrical Characteristics – Motors – Heat Pumps – 50Hz

Tons	Unit Model Number	Compressor Motors						Condenser Fan Motor				
		Volts	Phase	Compressor 1		Compressor 2		No.	Volts	Phase	Amps	
				RLA (Amps)	LRA (Amps)	RLA (Amps)	LRA (Amps)				FLA (Ea.)	LRA (Ea.)
5	TWA0604DA	380/415	3	10.6	74.0	N/A	N/A	1	380/415	1	1.6	3.8
	TWA0604DD	380/415	3	5.4	38.0	5.4	38.0	1	380/415	1	1.6	3.8
6.25	TWA0764DA	380/415	3	12.2	100.0	N/A	N/A	1	380/415	1	1.6	3.8
	TWA0764DD	380/415	3	6.0	43.0	6.0	43.0	1	380/415	1	1.6	3.8
8.33	TWA1014DA	380/415	3	17.8	145.0	N/A	N/A	1	380/415	1	1.9	5.8
	TWA1014DD	380/415	3	7.8	51.5	7.8	51.5	1	380/415	1	1.9	5.8
13	TWA1564DD	380/415	3	12.2	101.0	12.2	101.0	2	380/415	1	1.9	5.8
16.7	TWA2014DD	380/415	3	18.5	118.0	18.5	118.0	2	380/415	1	1.9	5.8

Table 80. Unit wiring – heat pumps – 50 Hz

Tons	Unit Model Number	Unit Operating Voltage Range	Max Circuit Ampacity	Max Fuse Size or Max Circuit Breaker
5	TWA0604DA	380/415	14.9	25
5	TWA0604DD	380/415	13.8	15
6.25	TWA0764DA	380/415	17.0	25
6.25	TWA0764DD	380/415	15.1	20
8.33	TWA1014DA	380/415	24.2	40
8.33	TWA1014DD	380/415	19.5	25
13	TWA1564DD	380/415	31.2	40
16.7	TWA2014DD	380/415	45.4	60

Note: HACR type circuit breaker per NEC.

## Air Handler (Standard)

Table 81. Electrical characteristics – standard motor – 50 Hz air handler

Tons	Unit Model Number	Standard Evaporator Fan Motor							
		No.	Volts	Phase	HP	Amps		MCA	MFS
						FLA	LRA		
4.6	TWE0514DA	1	380-415	3	0.75	1.45	8.00	1.81	15.00
6	TWE0724DB	1	380-415	3	1.00	2.50	17.00	3.13	15.00
6.25	TWE0764DA, B	1	380-415	3	1.00	2.50	17.00	3.13	15.00
8.33	TWE1014DA, B	1	380-415	3	1.50	3.30	19.00	4.13	15.00
10.4	TWE1264DB	1	380-415	3	2.00	3.20	35.00	4.00	15.00
13	TWE1564DB	1	380-415	3	2.00	4.60	39.00	5.75	15.00
16.7	TWE2014DB	1	380-415	3	3.50	8.00	43.00	10.00	15.00



**Electrical Data**

**Table 82. Unit wiring with electric heat (single point connection) — air handlers**

<b>Ton</b>	<b>Used With</b>	<b>Heater Model No.</b>	<b>Heater kW Rating</b>	<b>Unit Power Supply</b>	<b>Control Stages</b>	<b>Min Circuit Ampacity</b>	<b>Max Fuse Breaker Size</b>		
4.6	TWE0514DA	BAYHTRL405*	5	380/3/50	1	8	15		
		BAYHTRL410*	9.96	380/3/50	1	14	15		
		BAYHTRL415*	14.96	380/3/50	1	20	20		
		BAYHTRL425*	24.92	380/3/50	2	31	35		
		BAYHTRL405*	5	415/3/50	1	8	15		
		BAYHTRL410*	9.96	415/3/50	1	15	15		
		BAYHTRL415*	14.96	415/3/50	1	21	25		
		BAYHTRL425*	24.92	415/3/50	2	34	35		
6	TWE0724DB	BAYHTRL405*	5	380/3/50	1	9	15		
		BAYHTRL410*	9.96	380/3/50	1	15	15		
		BAYHTRL415*	14.96	380/3/50	1	21	25		
		BAYHTRL425*	24.92	380/3/50	2	33	35		
		BAYHTRL435*	34.88	380/3/50	2	45	45		
		BAYHTRL405*	5	415/3/50	1	10	15		
		BAYHTRL410*	9.96	415/3/50	1	16	20		
		BAYHTRL415*	14.96	415/3/50	1	23	25		
		BAYHTRL425*	24.92	415/3/50	2	36	40		
		BAYHTRL435*	34.88	415/3/50	2	48	50		
6.25	TWE0764DA, B	BAYHTRL405*	5	380/3/50	1	9	15		
		BAYHTRL410*	9.96	380/3/50	1	15	15		
		BAYHTRL415*	14.96	380/3/50	1	21	25		
		BAYHTRL425*	24.92	380/3/50	2	33	35		
		BAYHTRL435*	34.88	380/3/50	2	45	45		
		BAYHTRL405*	5	415/3/50	1	10	15		
		BAYHTRL410*	9.96	415/3/50	1	16	20		
		BAYHTRL415*	14.96	415/3/50	1	23	25		
		BAYHTRL425*	24.92	415/3/50	2	36	40		
		BAYHTRL435*	34.88	415/3/50	2	48	50		
		8.33	TWE1014DA, B	BAYHTRL405*	5	380/3/50	1	10	15
				BAYHTRL410*	9.96	380/3/50	1	16	20
BAYHTRL415*	14.96			380/3/50	1	22	25		
BAYHTRL425*	24.92			380/3/50	2	34	35		
BAYHTRL435*	34.88			380/3/50	2	46	50		
BAYHTRL405*	5			415/3/50	1	11	15		
BAYHTRL410*	9.96			415/3/50	1	17	20		
BAYHTRL415*	14.96			415/3/50	1	24	25		
BAYHTRL425*	24.92			415/3/50	2	37	40		
BAYHTRL435*	34.88			415/3/50	2	49	50		

**Table 82. Unit wiring with electric heat (single point connection) – air handlers (continued)**

<b>Ton</b>	<b>Used With</b>	<b>Heater Model No.</b>	<b>Heater kW Rating</b>	<b>Unit Power Supply</b>	<b>Control Stages</b>	<b>Min Circuit Ampacity</b>	<b>Max Fuse Breaker Size</b>
10.4	TWE1264DB	BAYHTRM410*	10	380/3/50	1	16	20
		BAYHTRM420*	19.92	380/3/50	1	28	30
		BAYHTRM430*	29.92	380/3/50	2	40	40
		BAYHTRM450*	49.84	380/3/50	2	63	70
		BAYHTRM410*	10	415/3/50	1	17	20
		BAYHTRM420*	19.92	415/3/50	1	30	30
		BAYHTRM430*	29.92	415/3/50	2	43	45
		BAYHTRM450*	49.84	415/3/50	2	69	70
13	TWE1564DB	BAYHTRM410*	10	380/3/50	1	18	20
		BAYHTRM420*	19.92	380/3/50	1	29	30
		BAYHTRM430*	29.92	380/3/50	2	41	45
		BAYHTRM450*	49.84	380/3/50	2	65	70
		BAYHTRM410*	10	415/3/50	1	19	20
		BAYHTRM420*	19.92	415/3/50	1	32	35
		BAYHTRM430*	29.92	415/3/50	2	45	45
		BAYHTRM450*	49.84	415/3/50	2	71	80
16.7	TWE2014DB	BAYHTRM410*	10	380/3/50	1	22	25
		BAYHTRM420*	19.92	380/3/50	1	34	35
		BAYHTRM430*	29.92	380/3/50	2	46	50
		BAYHTRM450*	49.84	380/3/50	2	69	70
		BAYHTRM410*	10	415/3/50	1	23	25
		BAYHTRM420*	19.92	415/3/50	1	36	40
		BAYHTRM430*	29.92	415/3/50	2	49	50
		BAYHTRM450*	49.84	415/3/50	2	75	80

# Jobsite Connections

## ReliaTel Controls


Wiring shown with dashed lines is to be furnished and installed by the customer. All customer supplied wiring must be copper only and must conform to NEC and local electrical codes. Codes may require line of sight between disconnect switch and unit.

**Notes:**

1. When electric heater accessory is used, single point power entry or dual point power entry is field optional. Single point power entry option is through electric heater only.
2. \*\*\*Choose only one of the following; Thermostat, Zone Sensor, or NSB Panel.

**Important:** For the EDC switch to be functional and thereby facilitate reliable unit operation, make the EDC connections from the indoor to the outdoor control boxes.

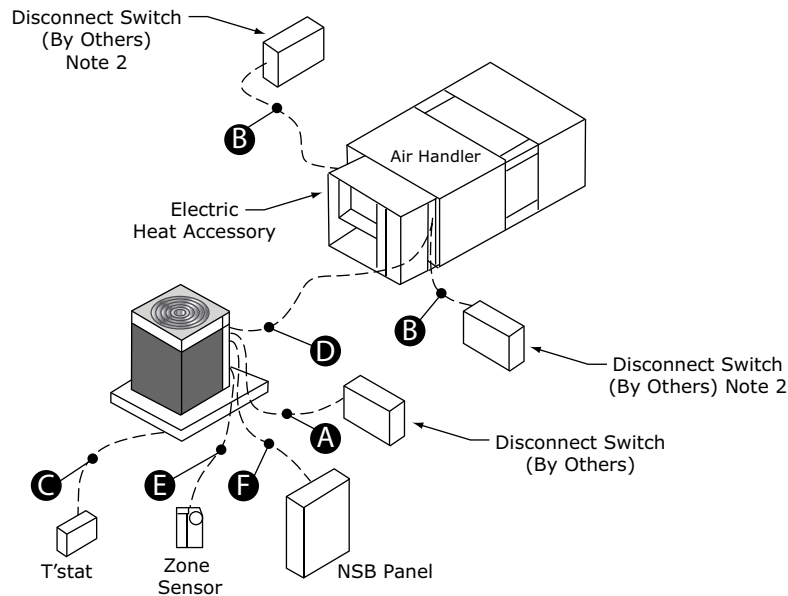**Figure 8. ReliaTel jobsite connections**



- A. 3 power wires, line voltage for 3 phase, (2 power wires for single phase)
- B. 3 power wires, line voltage for 3 phase, (2 power wires for single phase)
- C. Heat Pump thermostat: 5 to 8 wires depending on stages of electric heat
- D. 3 to 7 wires depending on type of outdoor unit(s)
- E. Zone Sensor: 4 to 10 wires depending on zone sensor model<sup>(a)</sup>
- F. Night Setback Panel: 7 wires

<sup>(a)</sup> For SZVAV air handlers: 4 additional wires are required (2 of which require twisted pair or shielded wire) in order to make connections between ReliaTel boards in the condenser and air handler.






# Dimensional Data

## Heat Pump Condenser




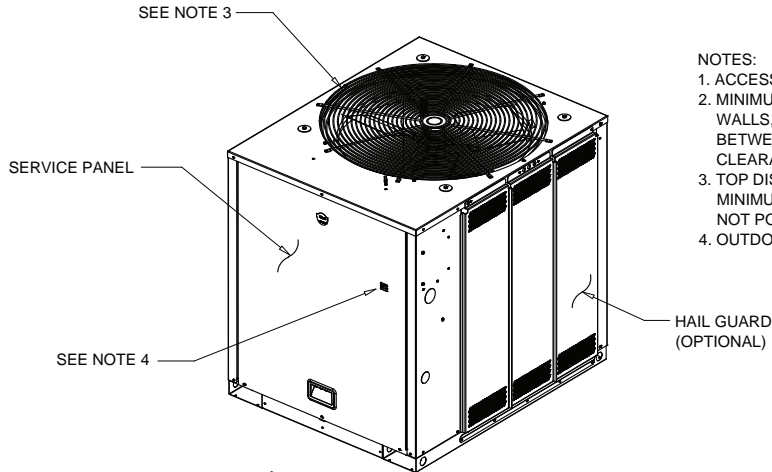
Figure 9. 5-6.25 ton heat pump, single compressor



**NOTES:**

1. ACCESS OPENING IS FOR FIELD INSTALLED BAYLOAM ACCESSORY.
2. MINIMUM CLEARANCE FOR PROPER OPERATION IS 36" (914.4) FROM WALLS, SHRUBBERY, PRIVACY FENCES ETC. MINIMUM CLEARANCE BETWEEN ADJACENT UNITS IS 72" (1828.8). RECOMMENDED SERVICE CLEARANCE 48" (1219.2)
3. TOP DISCHARGE AREA SHOULD BE UNRESTRICTED FOR 100' (2540) MINIMUM. UNIT SHOULD BE PLACED SO ROOF RUN-OFF WATER DOES NOT POUR DIRECTLY ON UNIT
4. OUTDOOR AIR TEMPERATURE SENSOR OPENING (DO NOT BLOCK OPENING)

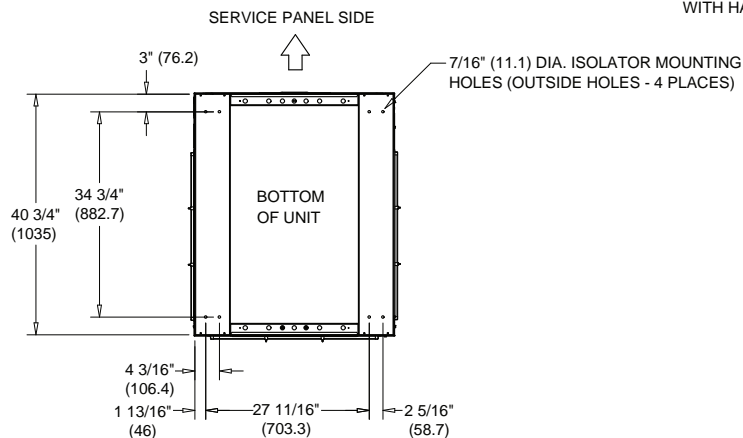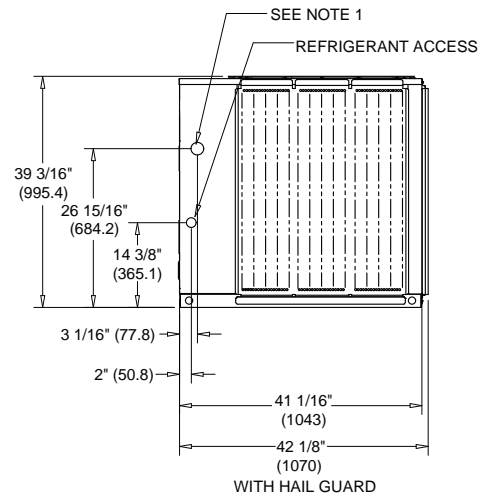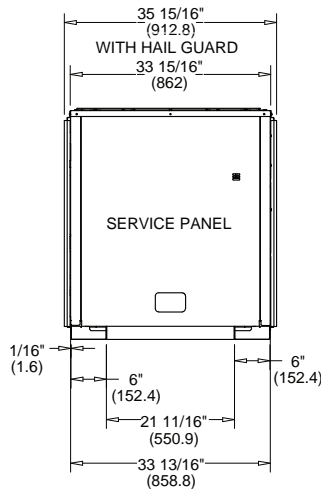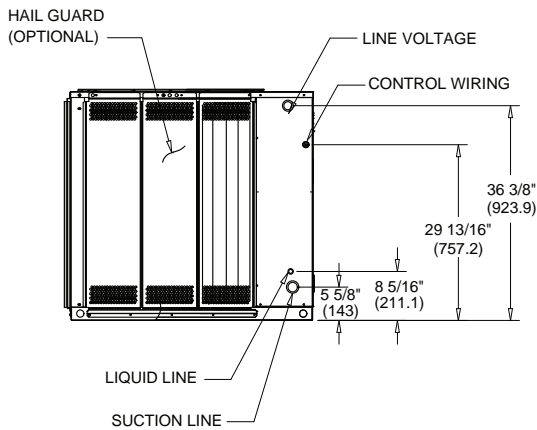
SERVICE CLEARANCE  
48" (1219.2) (SEE NOTE 2  
FOR CLEARANCE)





# Dimensional Data

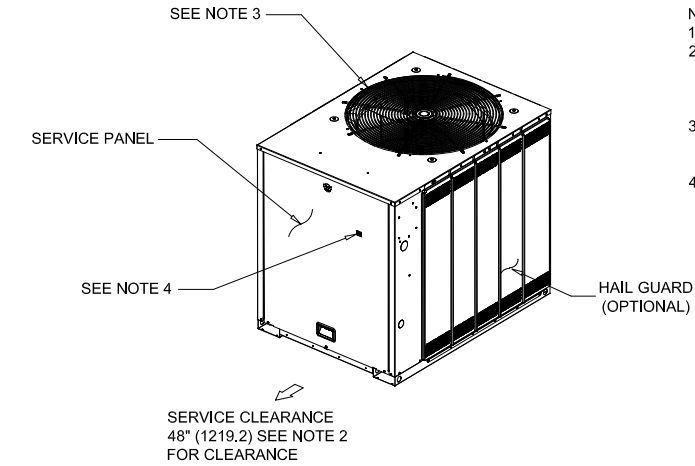**Figure 10. 5-6.25 ton heat pump, dual compressor**



- NOTES:
1. ACCESS OPENING IS FOR OPTION FIELD INSTALLED ACCESSORY.
  2. MINIMUM CLEARANCE FOR PROPER OPERATION IS 36" (914.4) FROM WALLS, SHRUBBERY, PRIVACY FENCES ETC. MINIMUM CLEARANCE BETWEEN ADJACENT UNITS IS 72" (1828.8). RECOMMENDED SERVICE CLEARANCE 48" (1219.2)
  3. TOP DISCHARGE AREA SHOULD BE UNRESTRICTED FOR 100"(2540) MINIMUM. UNIT SHOULD BE PLACED SO ROOF RUN-OFF WATER DOES NOT POUR DIRECTLY ON UNIT
  4. OUTDOOR AIR TEMPERATURE SENSOR OPENING (DO NOT BLOCK OPENING).



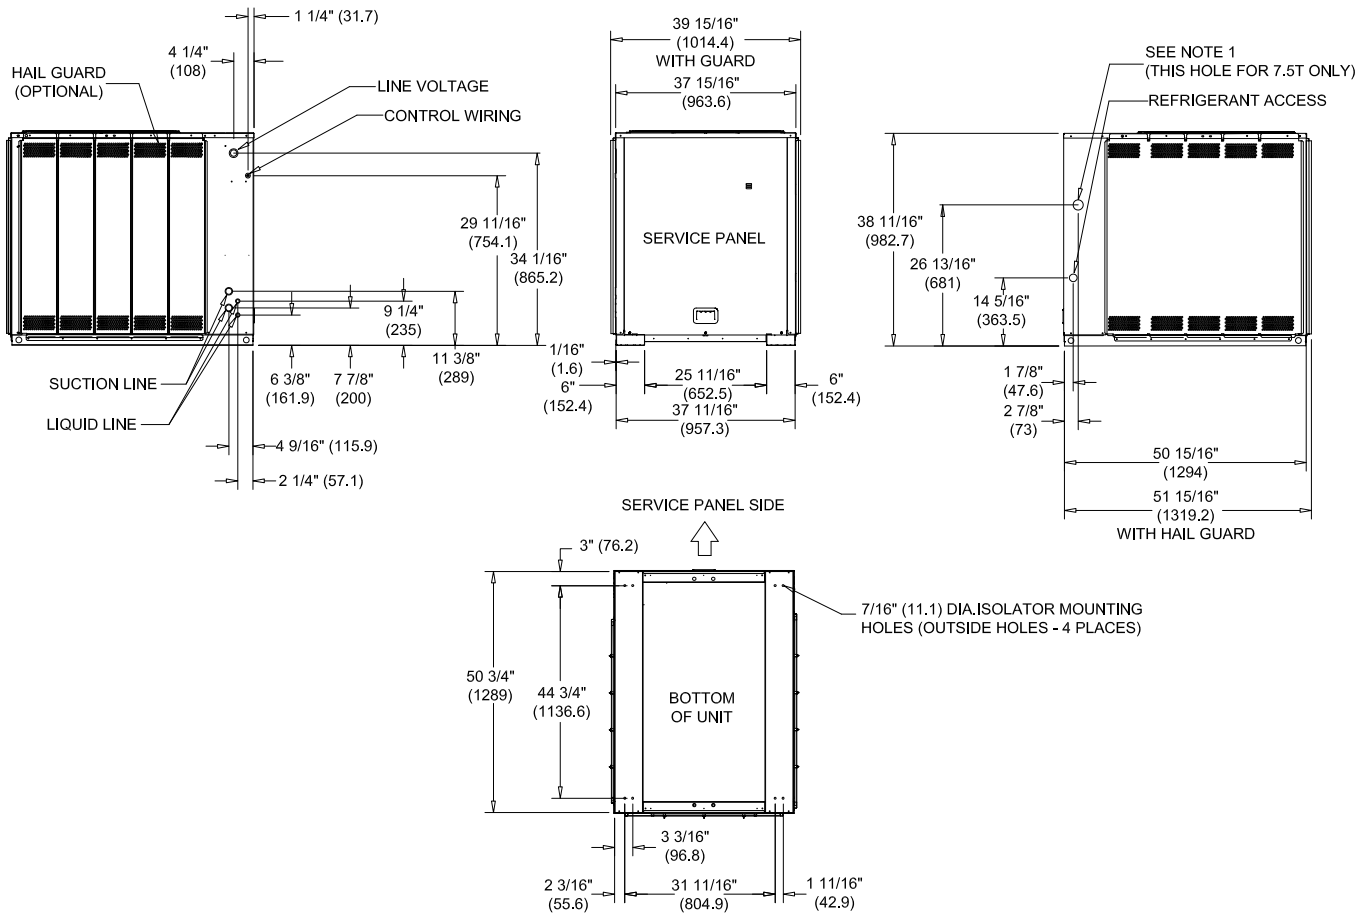


Figure 11. 8.33 ton heat pump, single compressor

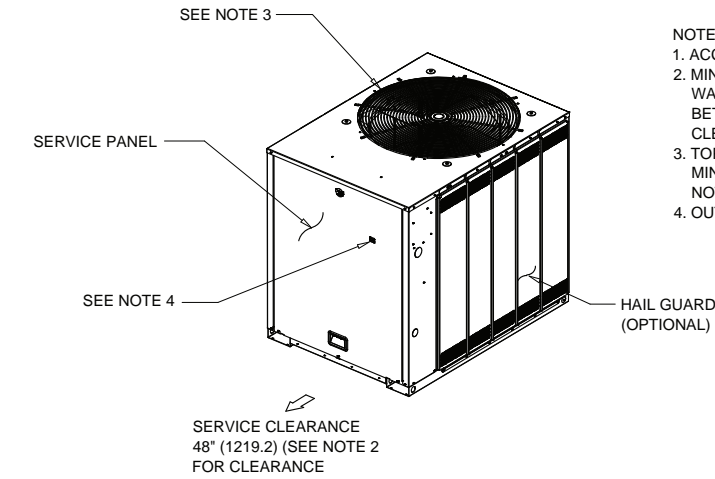

NOTES:

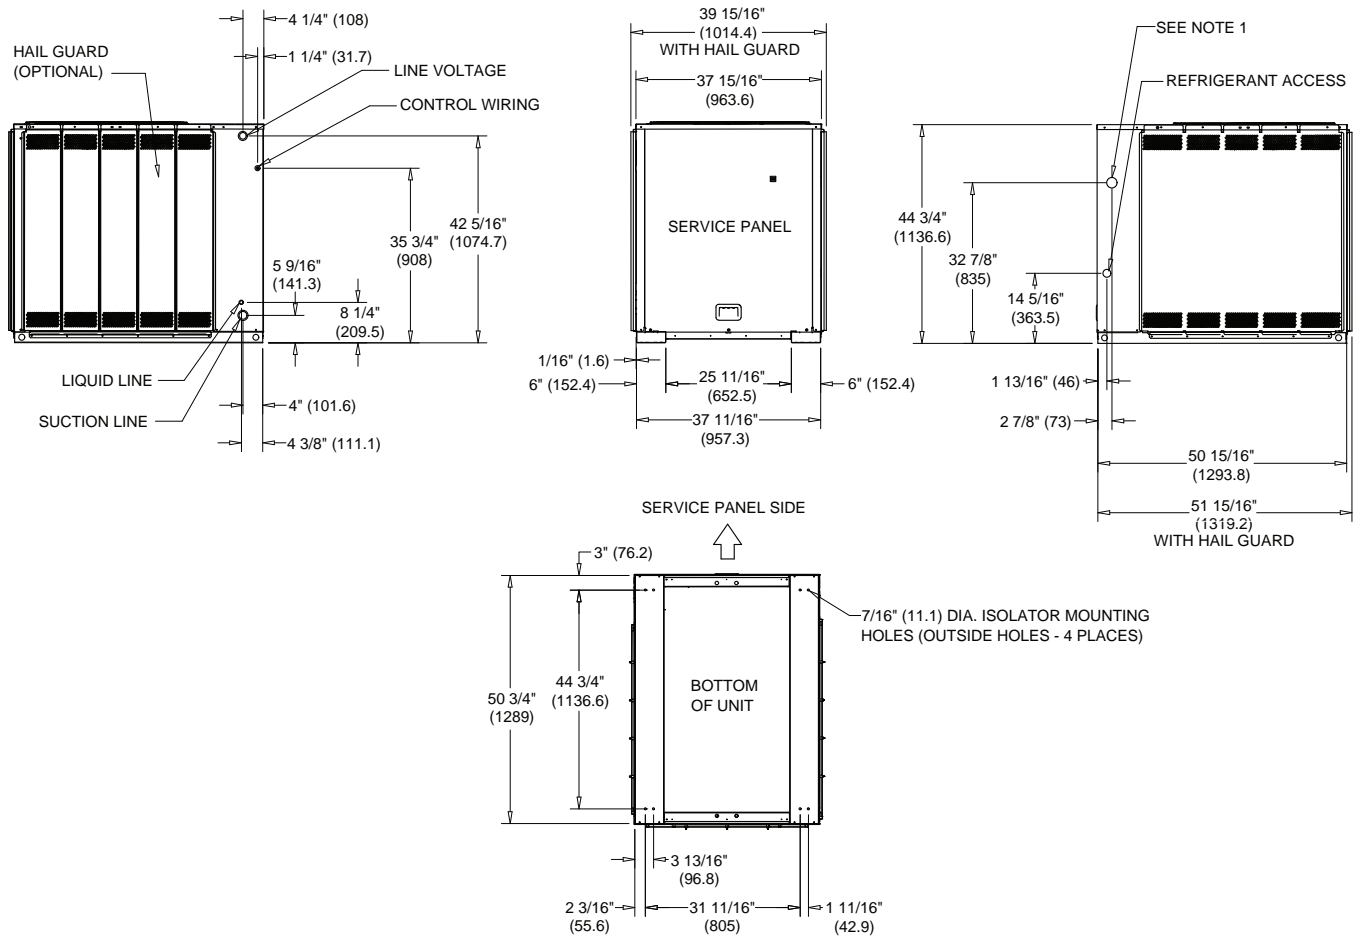1. ACCESS OPENING IS FOR FIELD INSTALLED BAYLOAM ACCESSORY.
2. MINIMUM CLEARANCE FOR PROPER OPERATION IS 36" (914.4) FROM WALLS, SHRUBBERY, PRIVACY FENCES ETC. MINIMUM CLEARANCE BETWEEN ADJACENT UNITS IS 72" (1828.8). RECOMMENDED SERVICE CLEARANCE 48" (1219.2)
3. TOP DISCHARGE AREA SHOULD BE UNRESTRICTED FOR 100' (2540) MINIMUM. UNIT SHOULD BE PLACED SO ROOF RUN-OFF WATER DOES NOT POUR DIRECTLY ON UNIT
4. OUTDOOR AIR TEMPERATURE SENSOR OPENING (DO NOT BLOCK OPENING)





# Dimensional Data

**Figure 12. 8.33 ton heat pump, dual compressor**



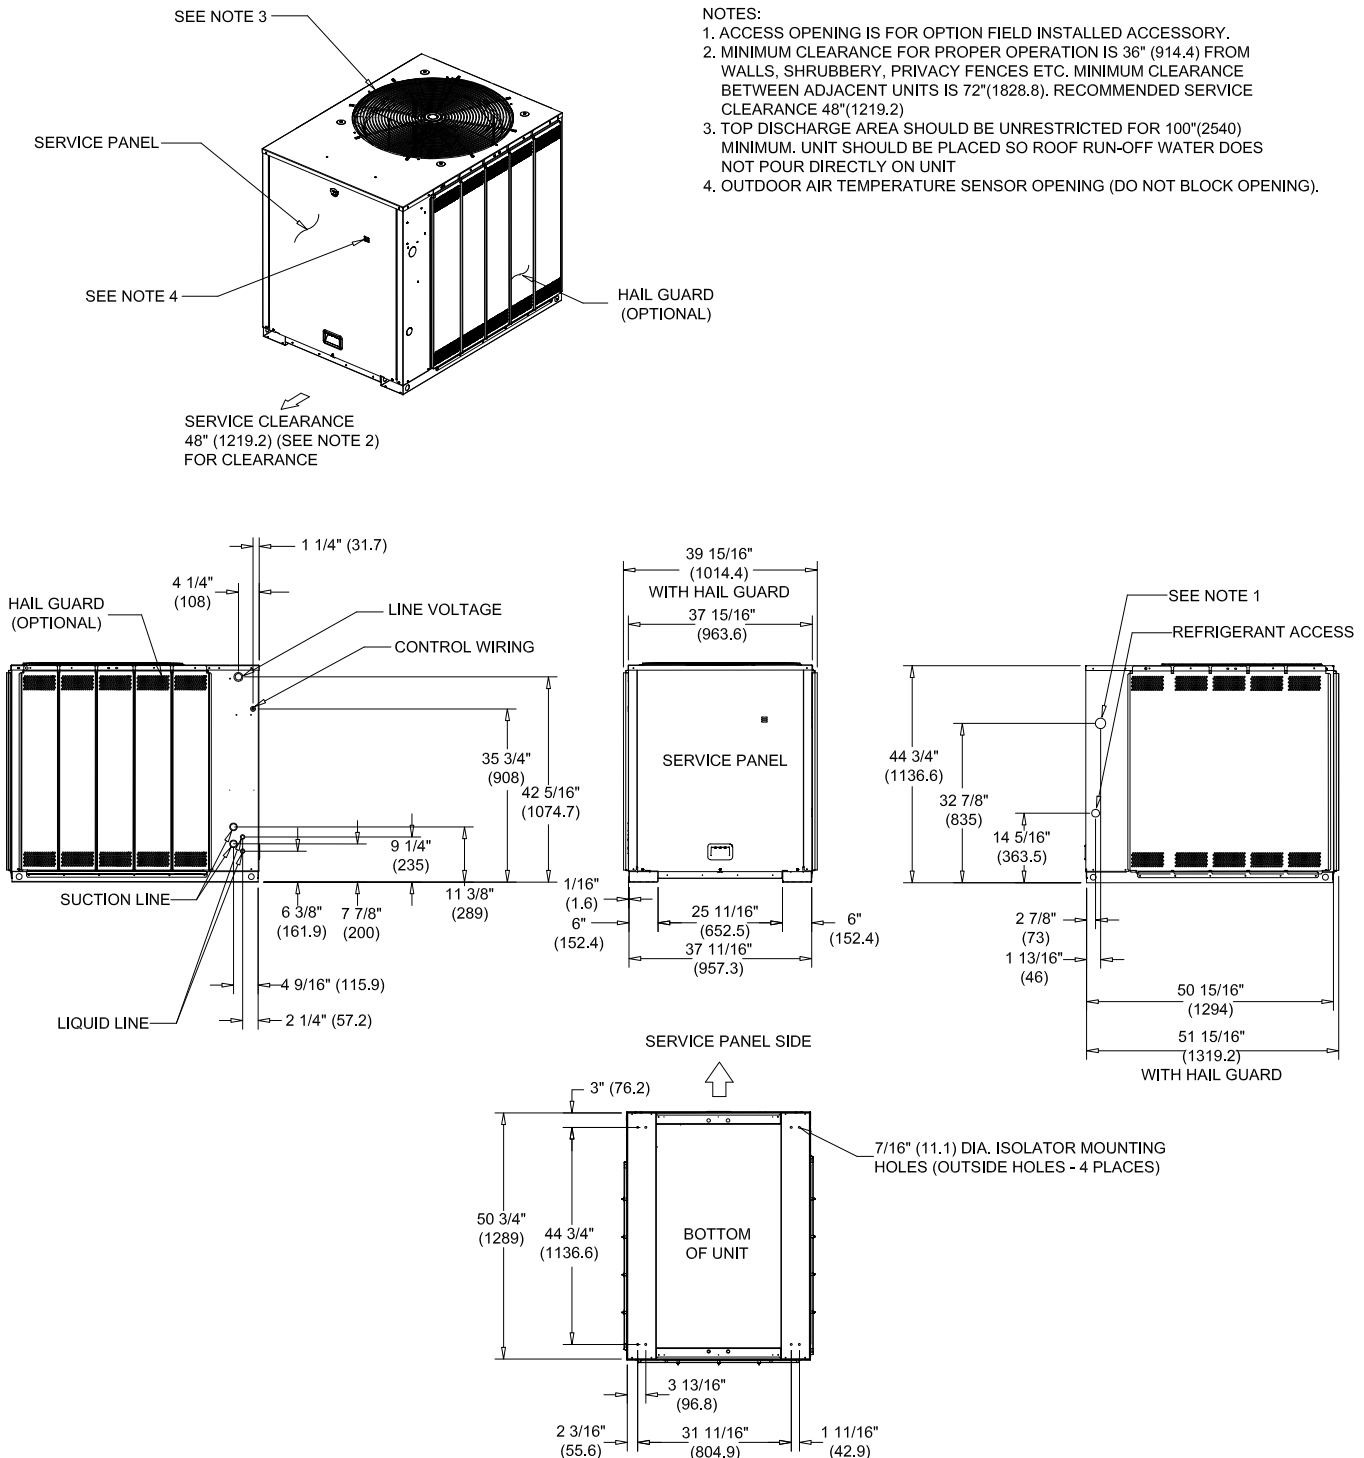
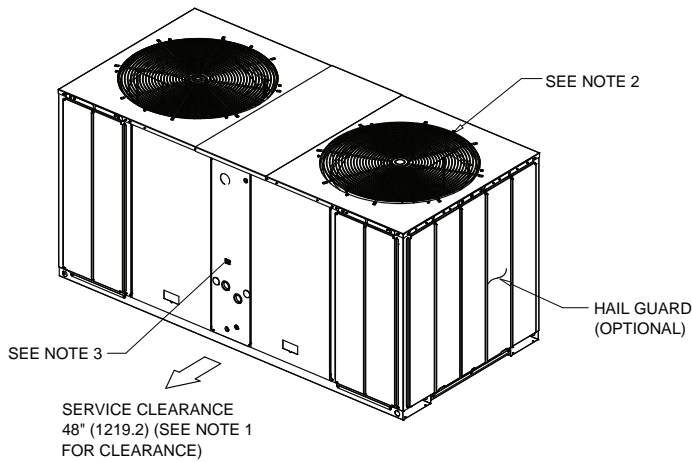
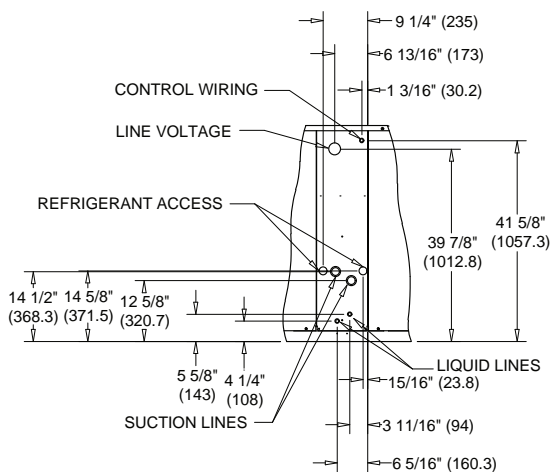
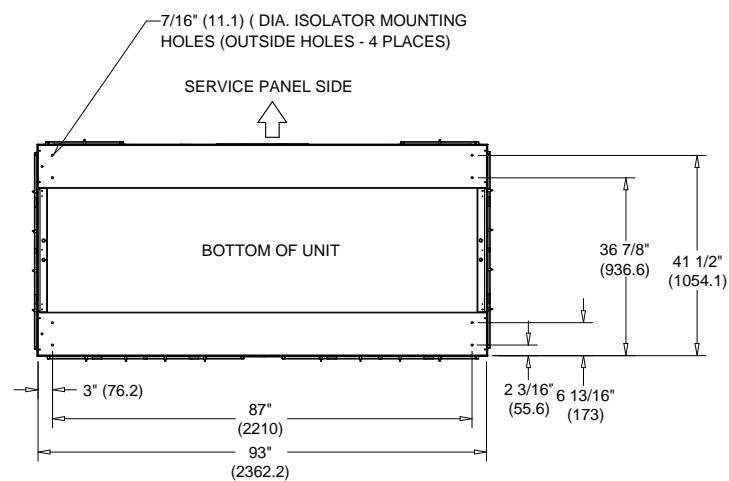


Figure 13. 13-16.7 ton heat pump, dual compressor

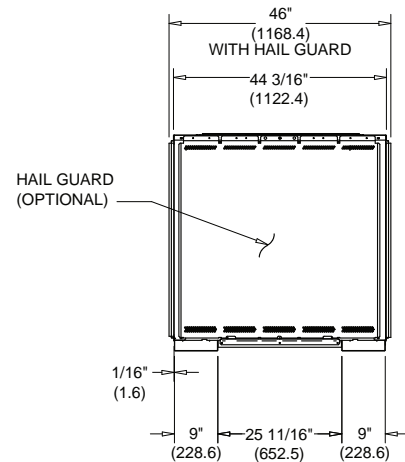

NOTES:

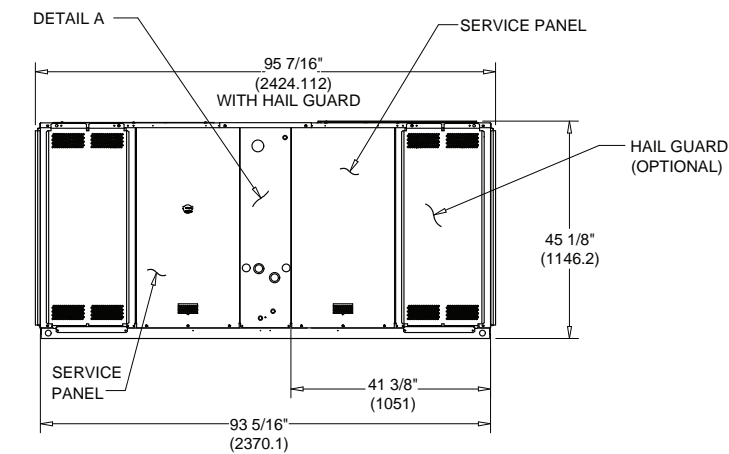1. MINIMUM CLEARANCE FOR PROPER OPERATION IS 36" (914.4) FROM WALLS, SHRUBBERY, PRIVACY FENCES ETC. MINIMUM CLEARANCE BETWEEN ADJACENT UNITS IS 72" (1829). RECOMMENDED SERVICE CLEARANCE 48" (1219.2)
2. TOP DISCHARGE AREA SHOULD BE UNRESTRICTED FOR 100" (2540) MINIMUM. UNIT SHOULD BE PLACED SO ROOF RUN-OFF WATER DOES NOT POUR DIRECTLY ON UNIT
3. OUTDOOR AIR TEMPERATURE SENSOR OPENING (DO NOT BLOCK OPENING).



FRONT DETAIL A  
DIMENSIONAL DETAIL

# Air Handler

Figure 14. 4.6 ton air handler, single circuit


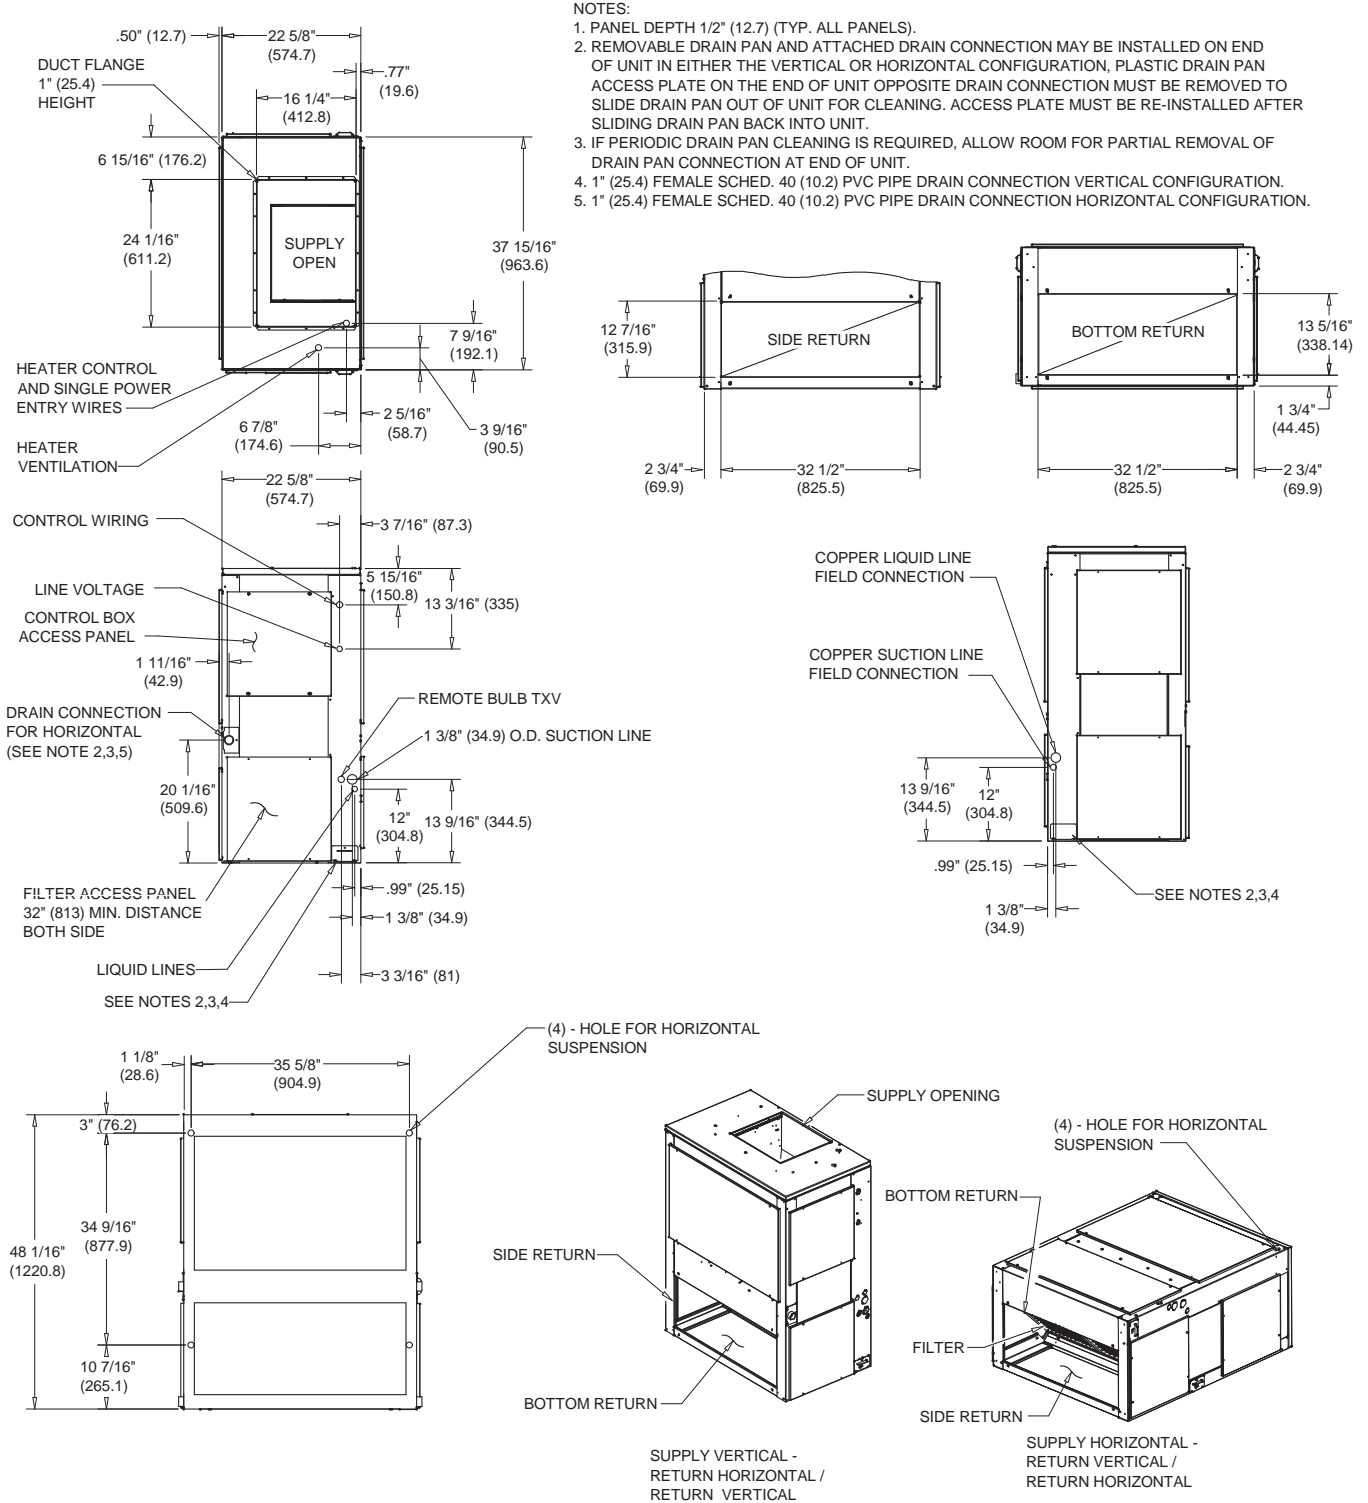


Figure 15. 6, 6.25 ton air handler, single circuit

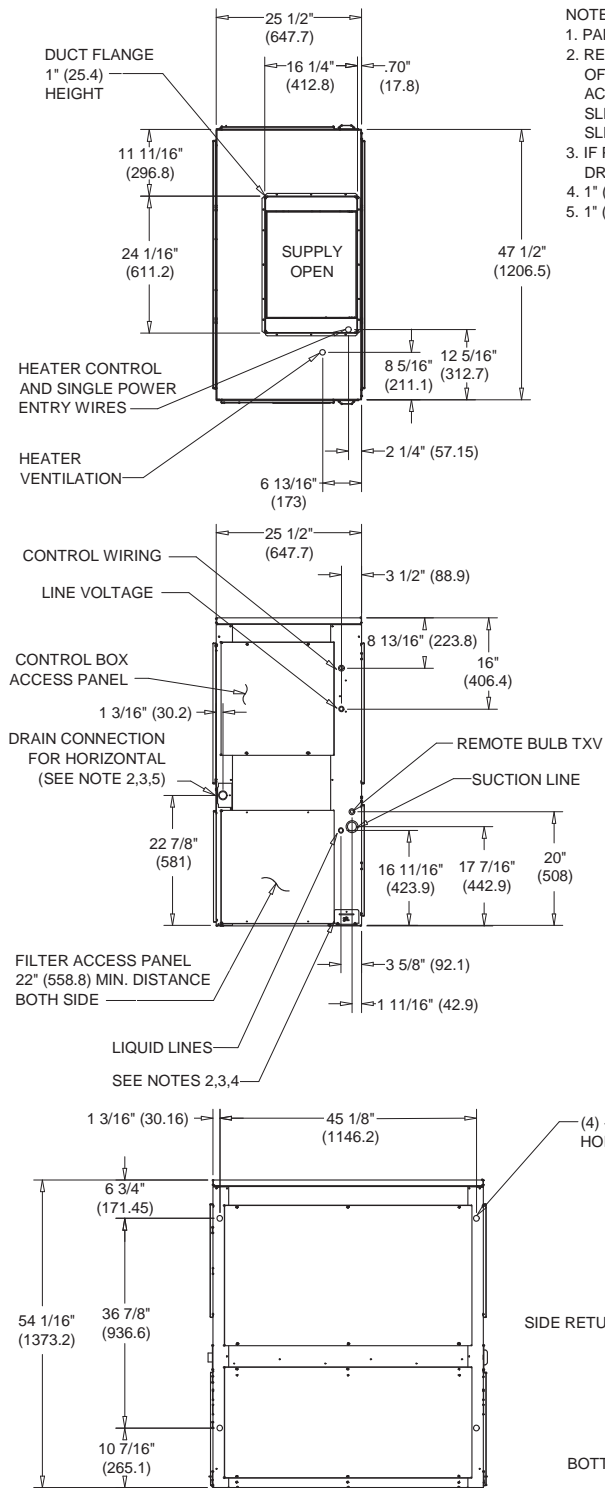

NOTES:

1. PANEL DEPTH 1/2" (12.7) (TYP. ALL PANELS).
2. REMOVABLE DRAIN PAN AND ATTACHED DRAIN CONNECTION MAY BE INSTALLED ON END OF UNIT IN EITHER THE VERTICAL OR HORIZONTAL CONFIGURATION, PLASTIC DRAIN PAN ACCESS PLATE ON THE END OF UNIT OPPOSITE DRAIN CONNECTION MUST BE REMOVED TO SLIDE DRAIN PAN OUT OF UNIT FOR CLEANING. ACCESS PLATE MUST BE RE-INSTALLED AFTER SLIDING DRAIN PAN BACK INTO UNIT.
3. IF PERIODIC DRAIN PAN CLEANING IS REQUIRED, ALLOW ROOM FOR PARTIAL REMOVAL OF DRAIN PAN CONNECTION AT END OF UNIT.
4. 1" (25.4) FEMALE SCHED. 40 (10.2) PVC PIPE DRAIN CONNECTION VERTICAL CONFIGURATION.
5. 1" (25.4) FEMALE SCHED. 40 (10.2) PVC PIPE DRAIN CONNECTION HORIZONTAL CONFIGURATION.

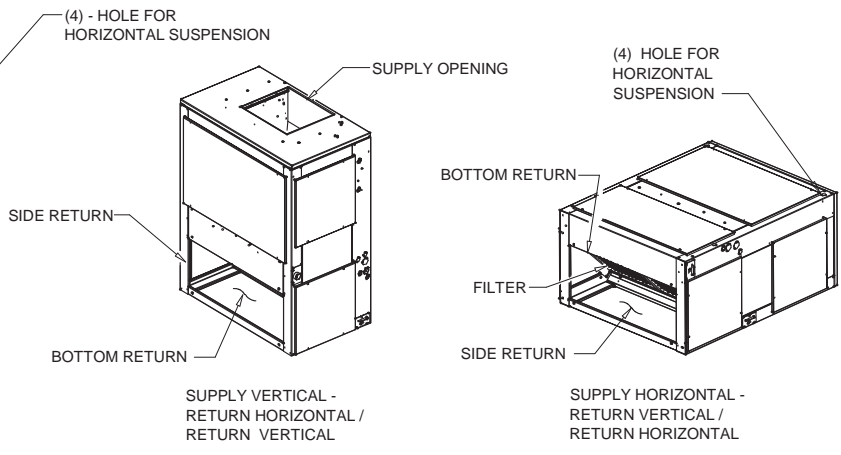
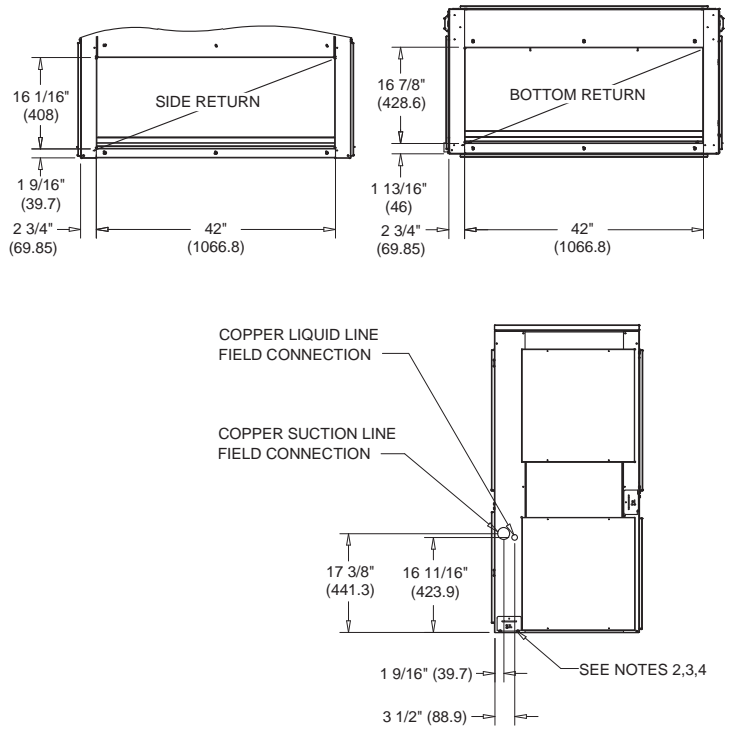







Figure 17. 8.33 ton air handler, single circuit

NOTES:

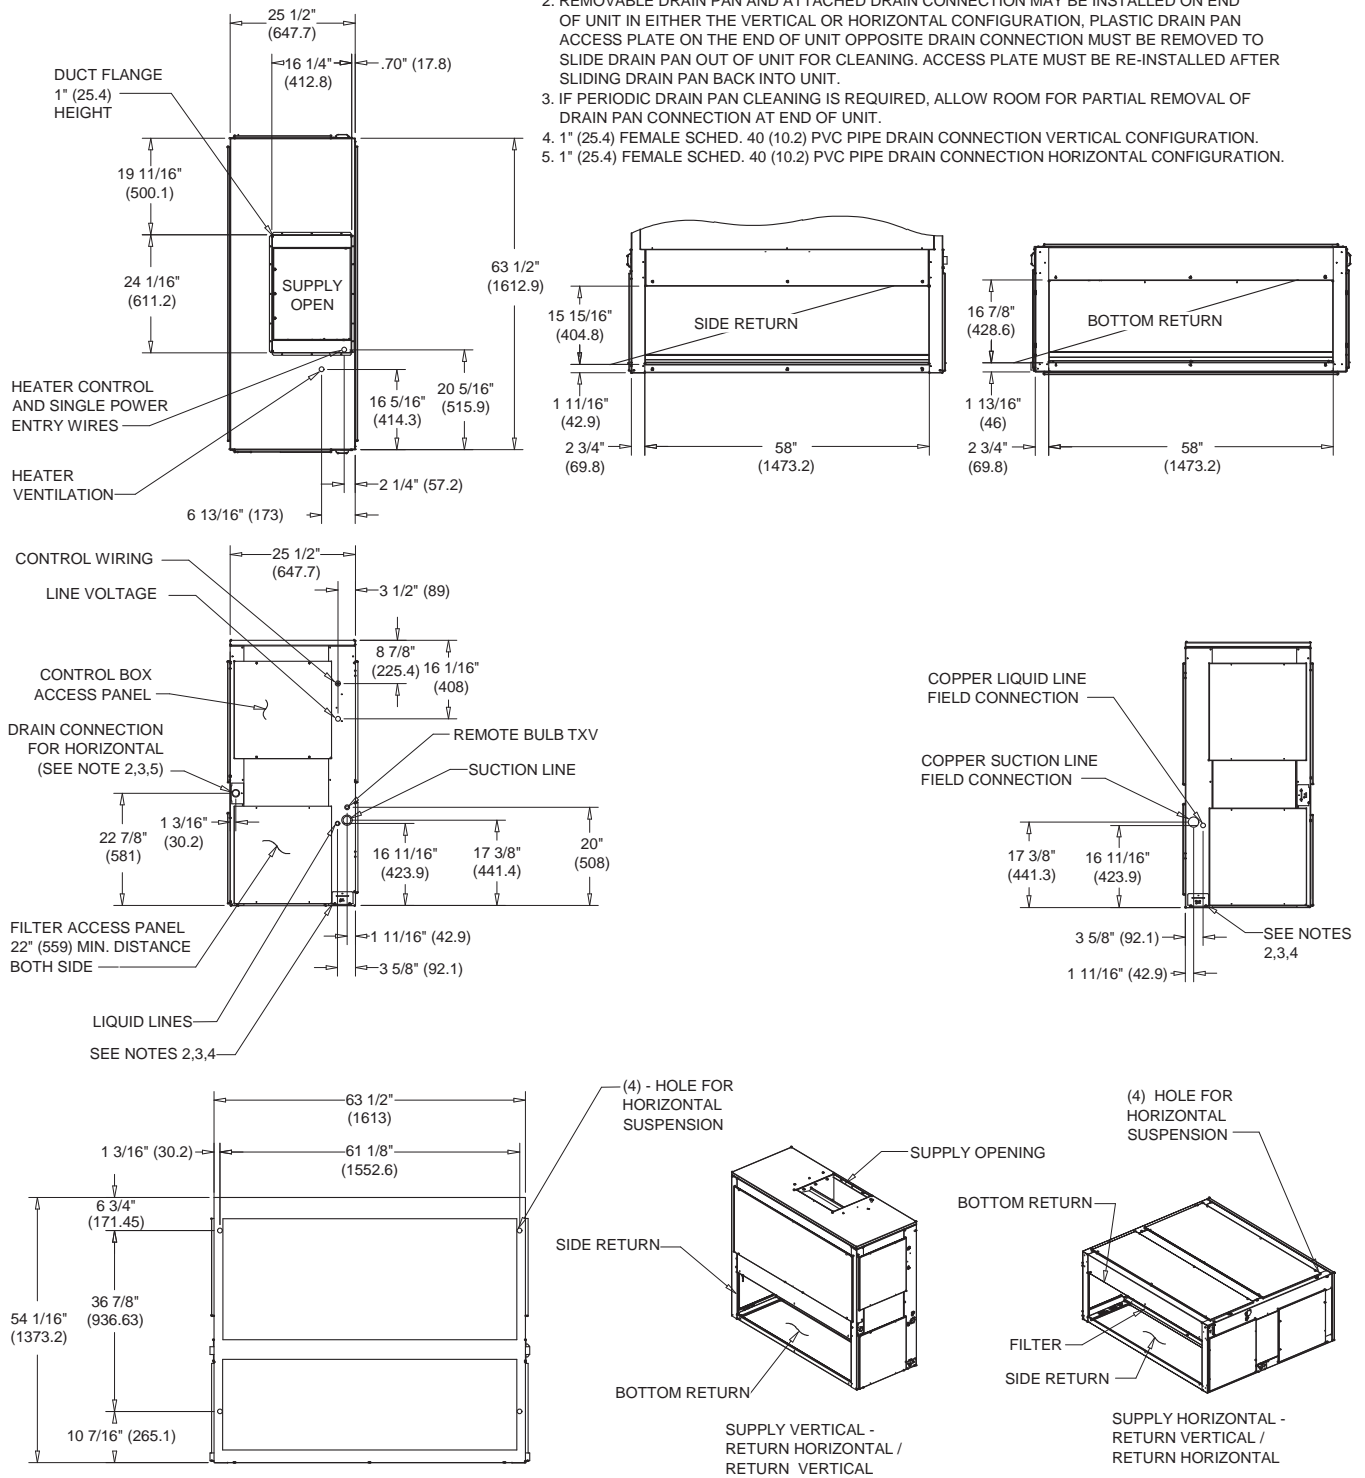1. PANEL DEPTH 1/2" (12.7) (TYP. ALL PANELS).
2. REMOVABLE DRAIN PAN AND ATTACHED DRAIN CONNECTION MAY BE INSTALLED ON END OF UNIT IN EITHER THE VERTICAL OR HORIZONTAL CONFIGURATION, PLASTIC DRAIN PAN ACCESS PLATE ON THE END OF UNIT OPPOSITE DRAIN CONNECTION MUST BE REMOVED TO SLIDE DRAIN PAN OUT OF UNIT FOR CLEANING. ACCESS PLATE MUST BE RE-INSTALLED AFTER SLIDING DRAIN PAN BACK INTO UNIT.
3. IF PERIODIC DRAIN PAN CLEANING IS REQUIRED, ALLOW ROOM FOR PARTIAL REMOVAL OF DRAIN PAN CONNECTION AT END OF UNIT.
4. 1" (25.4) FEMALE SCHED. 40 (10.2) PVC PIPE DRAIN CONNECTION VERTICAL CONFIGURATION.
5. 1" (25.4) FEMALE SCHED. 40 (10.2) PVC PIPE DRAIN CONNECTION HORIZONTAL CONFIGURATION.



# Dimensional Data

**Figure 18. 8.33 ton air handler, dual circuit**

**NOTES:**

1. PANEL DEPTH 1/2" (12.7) (TYP. ALL PANELS).
2. REMOVABLE DRAIN PAN AND ATTACHED DRAIN CONNECTION MAY BE INSTALLED ON END OF UNIT IN EITHER THE VERTICAL OR HORIZONTAL CONFIGURATION, PLASTIC DRAIN PAN ACCESS PLATE ON THE END OF UNIT OPPOSITE DRAIN CONNECTION MUST BE REMOVED TO SLIDE DRAIN PAN OUT OF UNIT FOR CLEANING. ACCESS PLATE MUST BE RE-INSTALLED AFTER SLIDING DRAIN PAN BACK INTO UNIT.
3. IF PERIODIC DRAIN PAN CLEANING IS REQUIRED, ALLOW ROOM FOR PARTIAL REMOVAL OF DRAIN PAN CONNECTION AT END OF UNIT.
4. 1" (25.4) FEMALE SCHED. 40 (10.2) PVC PIPE DRAIN CONNECTION VERTICAL CONFIGURATION.
5. 1" (25.4) FEMALE SCHED. 40 (10.2) PVC PIPE DRAIN CONNECTION HORIZONTAL CONFIGURATION.



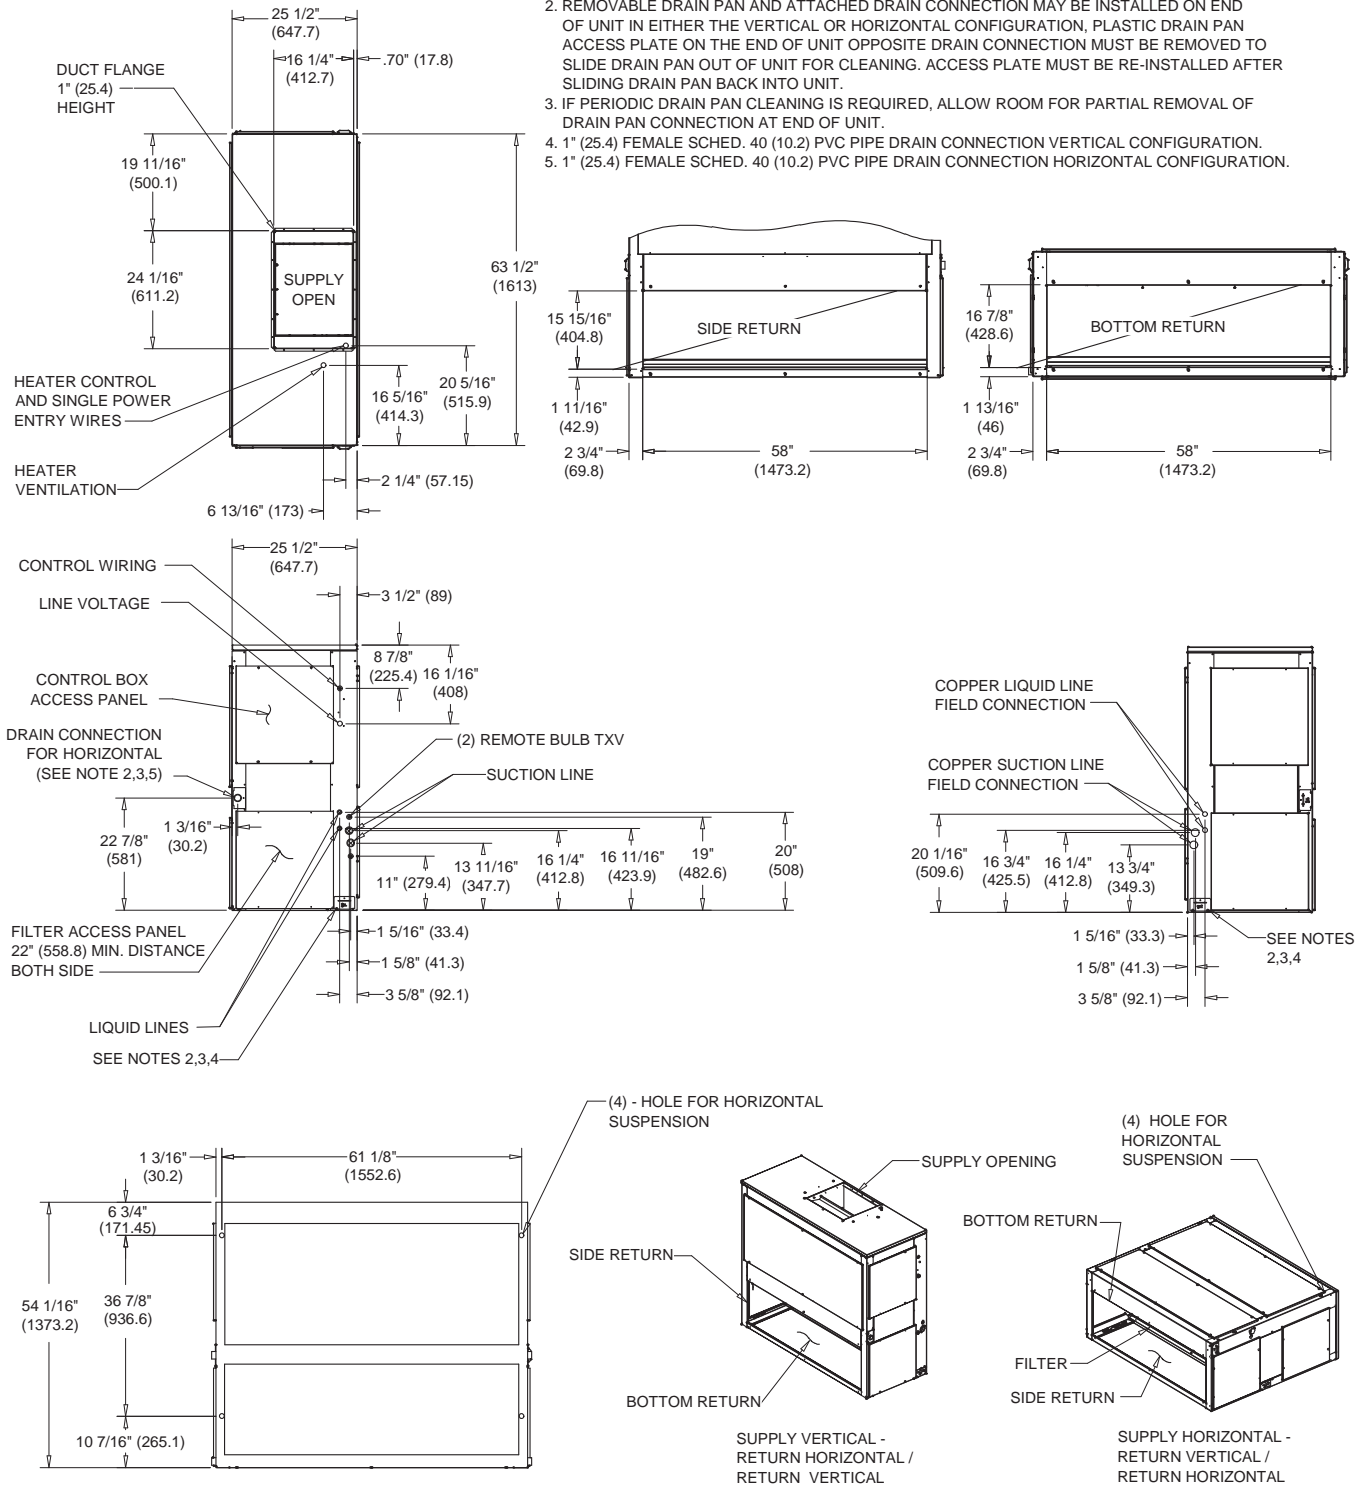


Figure 19. 10.4, 13 ton air handler, dual circuit

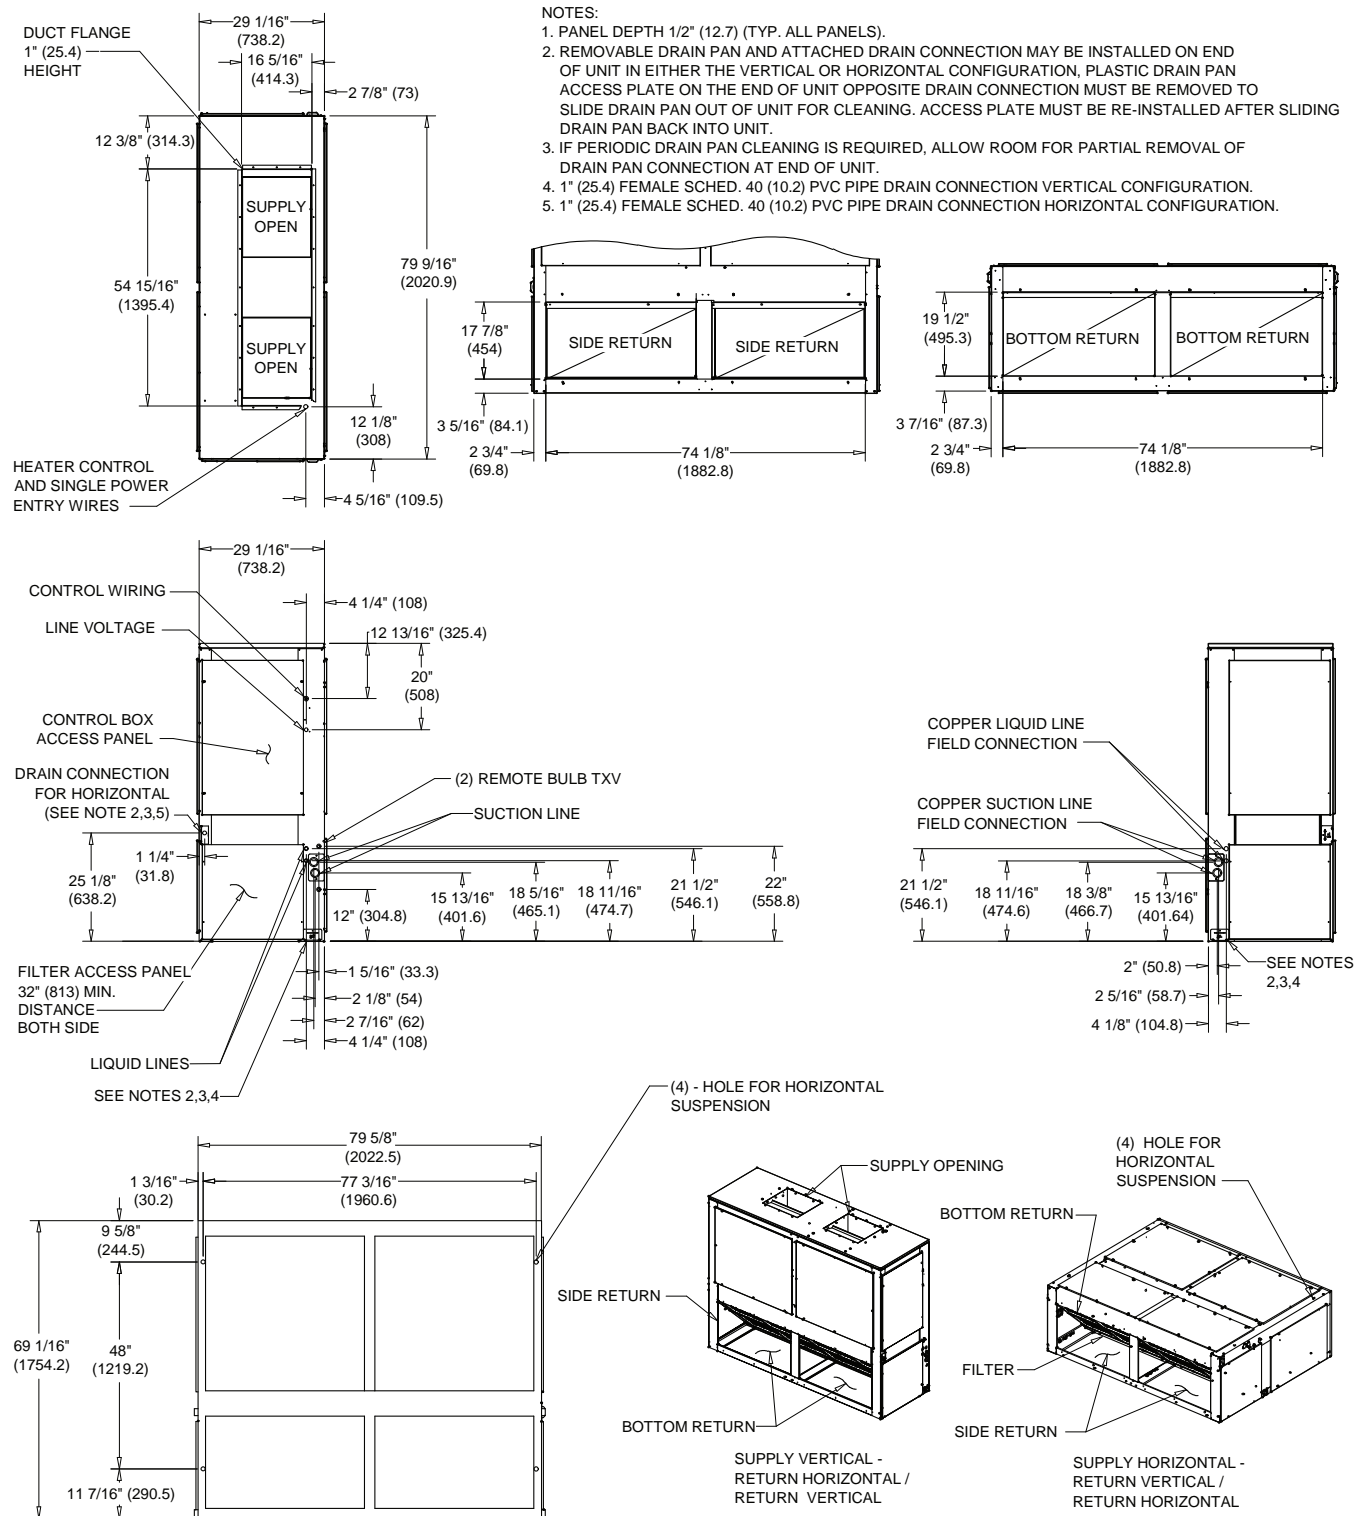


# Dimensional Data

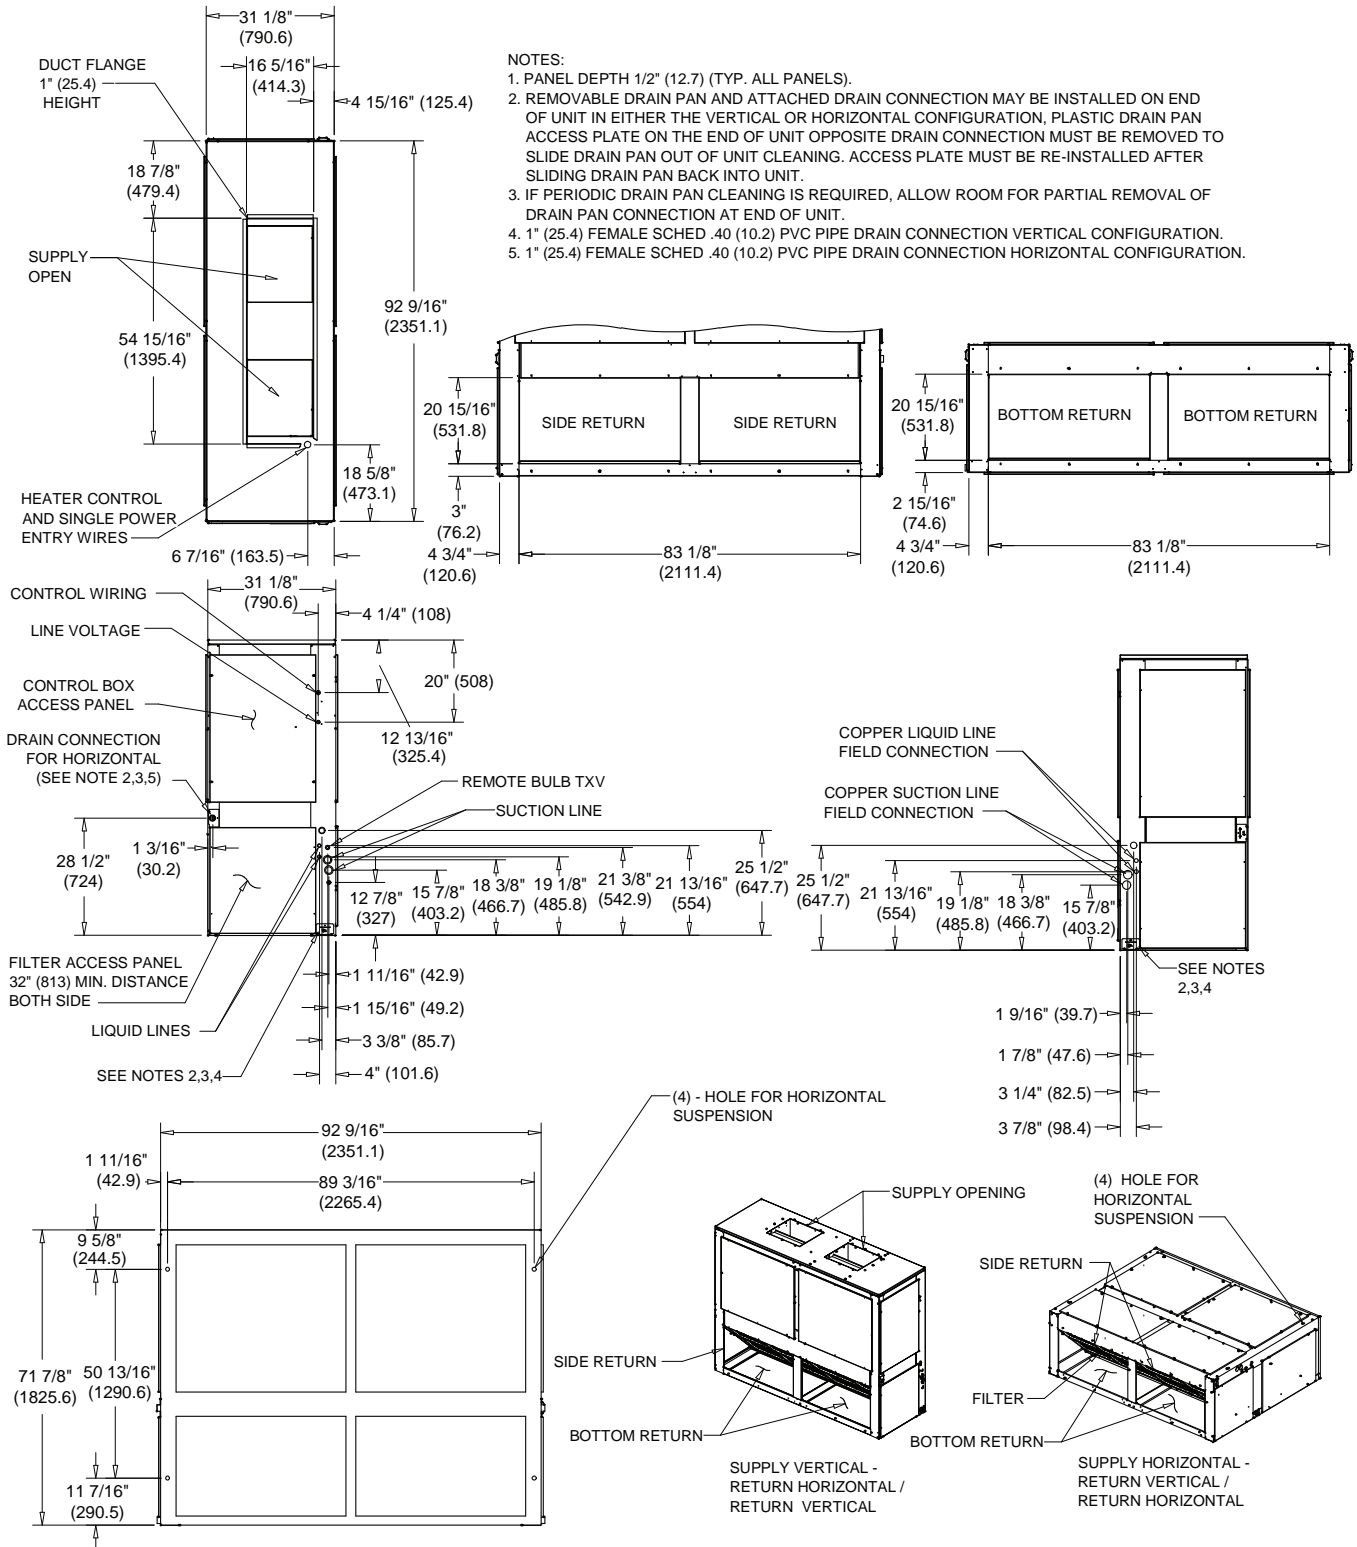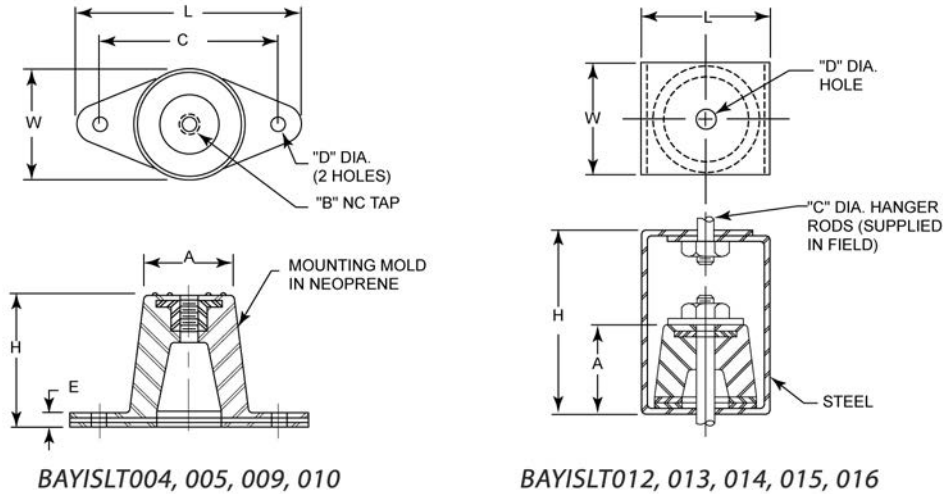**Figure 20. 16.7 ton air handler, dual circuit**



## Accessories

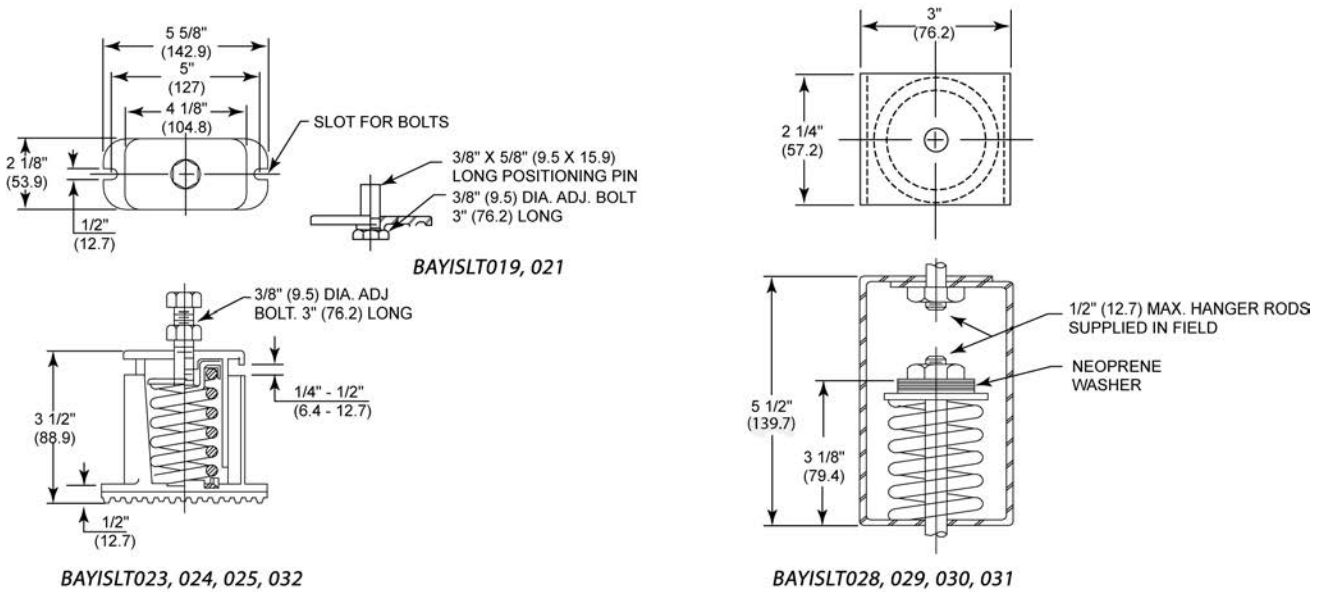
**Figure 21. Rubber isolator accessory dimensions**

**Table 83. Rubber isolator accessory dimensions**

Model No.	L	W	H	A	B	C	D	E
BAYISLT004	3-1/8 (79.375)	1-3/4 (44.45)	1-1/4 (31.75)	1-1/4 (31.75)	3/8 (9.525)	2-3/8 (60.325)	3/8 (9.525)	1/4 (6.35)
BAYISLT005	3-7/8 (98.425)	2-3/8 (60.325)	1-3/4 (44.45)	1-3/4 (44.45)	3/8 (9.525)	3 (76.2)	3/8 (9.525)	1/4 (6.35)
BAYISLT009	3-7/8 (98.425)	2-3/8 (60.325)	1-3/4 (44.45)	1-3/4 (44.45)	3/8 (9.525)	3 (76.2)	3/8 (9.525)	1/4 (6.35)
BAYISLT010	3-7/8 (98.425)	2-3/8 (60.325)	1-3/4 (44.45)	1-3/4 (44.45)	3/8 (9.525)	3 (76.2)	3/8 (9.525)	1/4 (6.35)
BAYISLT013	2-1/4 (57.15)	2 (50.8)	3 (76.2)	1-3/8 (34.925)	3/4 (19.05)	3/8 (9.525)	1/2 (12.7)	—
BAYISLT014	2-1/4 (57.15)	2 (50.8)	3 (76.2)	1-3/8 (34.925)	3/4 (19.05)	3/8 (9.525)	1/2 (12.7)	—
BAYISLT015	2-1/4 (57.15)	2 (50.8)	3 (76.2)	1-3/8 (34.925)	3/4 (19.05)	3/8 (9.525)	1/2 (12.7)	—
BAYISLT012	3 (76.2)	2-1/4 (57.15)	4-1/2 (114.3)	1-7/8 (47.625)	1/4 (6.35)	5/8 (15.875)	3/4 (19.05)	—
BAYISLT015 <sup>(a)</sup>	3 (76.2)	2-1/4 (57.15)	4-1/2 (114.3)	1-7/8 (47.625)	1/4 (6.35)	5/8 (15.875)	3/4 (19.05)	—
BAYISLT016	3 (76.2)	2-1/4 (57.15)	4-1/2 (114.3)	1-7/8 (47.625)	1/4 (6.35)	5/8 (15.875)	3/4 (19.05)	—

**Note:** BAYISLT015 contains a quantity 2 of the 2-1/4 x 2 x 3 isolators and quantity of 3 of the 3 x 2-1/4 x 4-1/2 isolators.

## Dimensional Data

**Figure 22. Spring isolator accessory dimensions – inches (millimeters)**



**Figure 23. Electric heater accessory for 4.6-8.3 ton air handlers – inches (millimeters)**


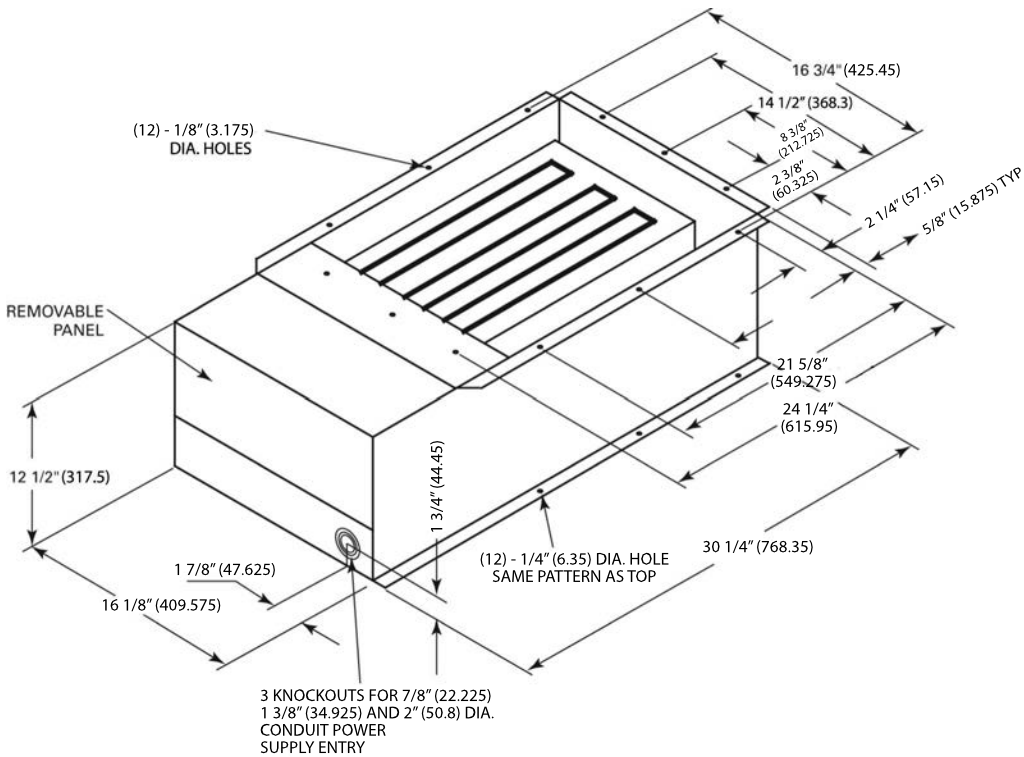


Figure 24. Electric heater accessory for 10.4-16.7 ton air handlers – inches (millimeters)

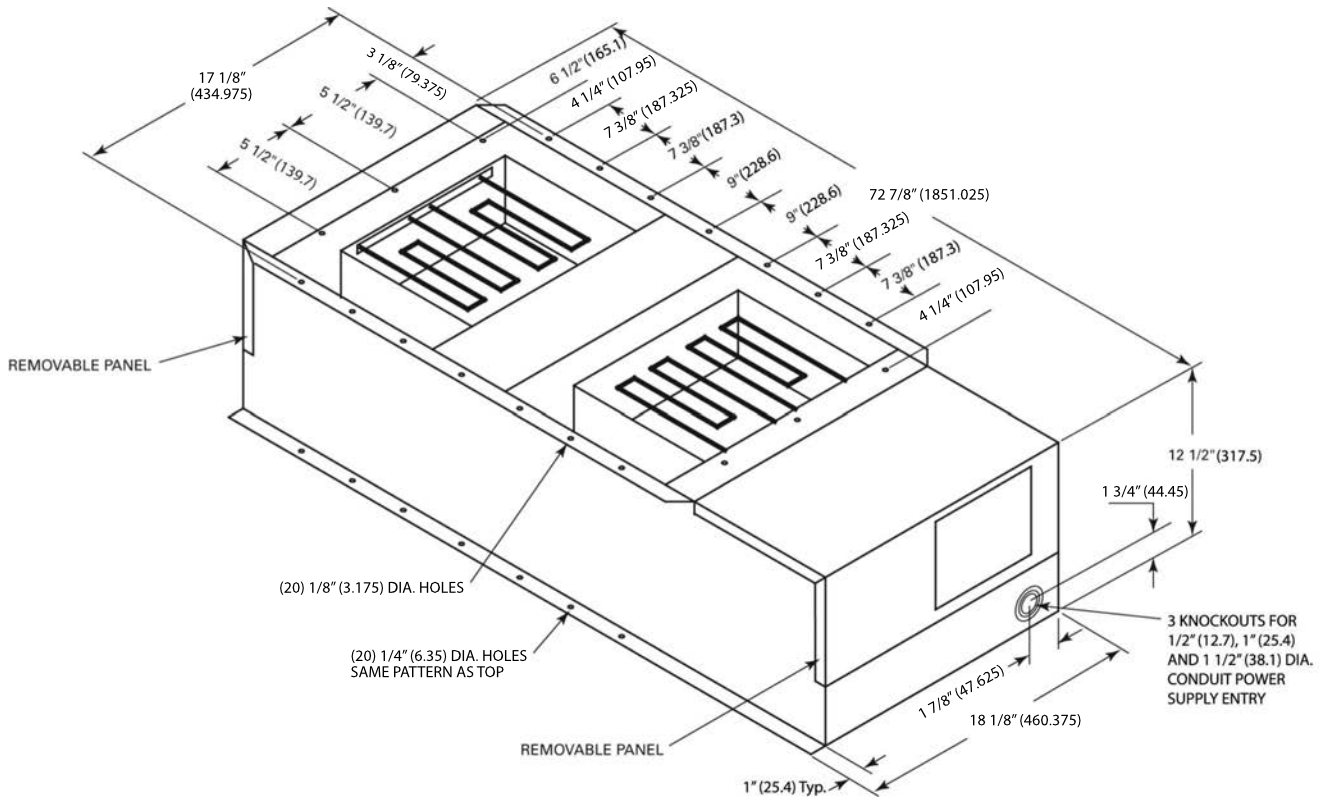

## Dimensional Data

Figure 25. Hot water coil accessory – inches (millimeters)

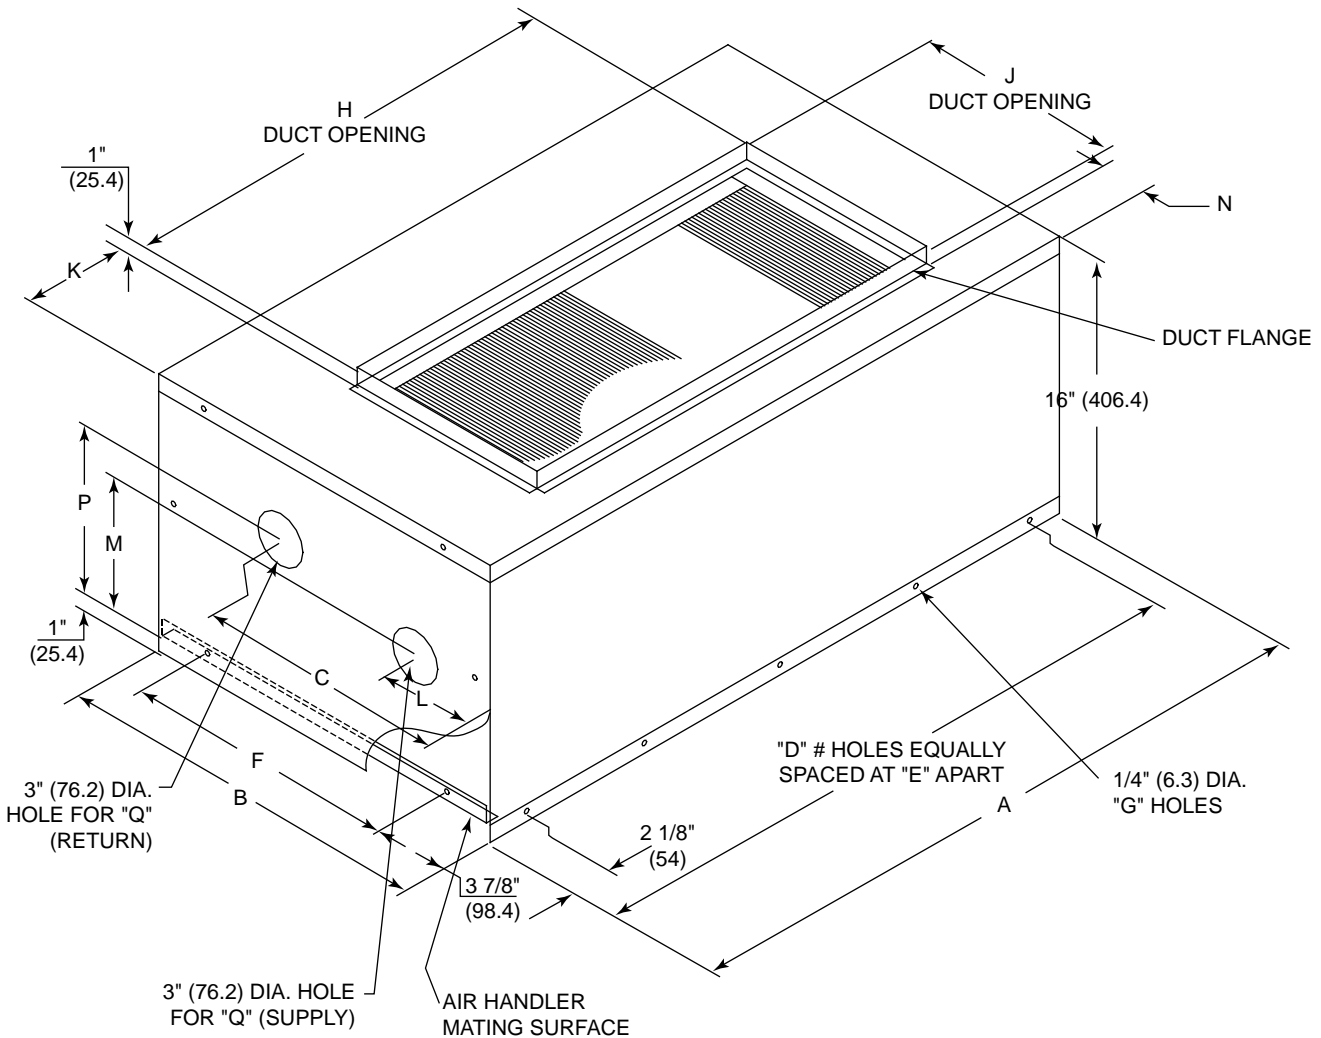
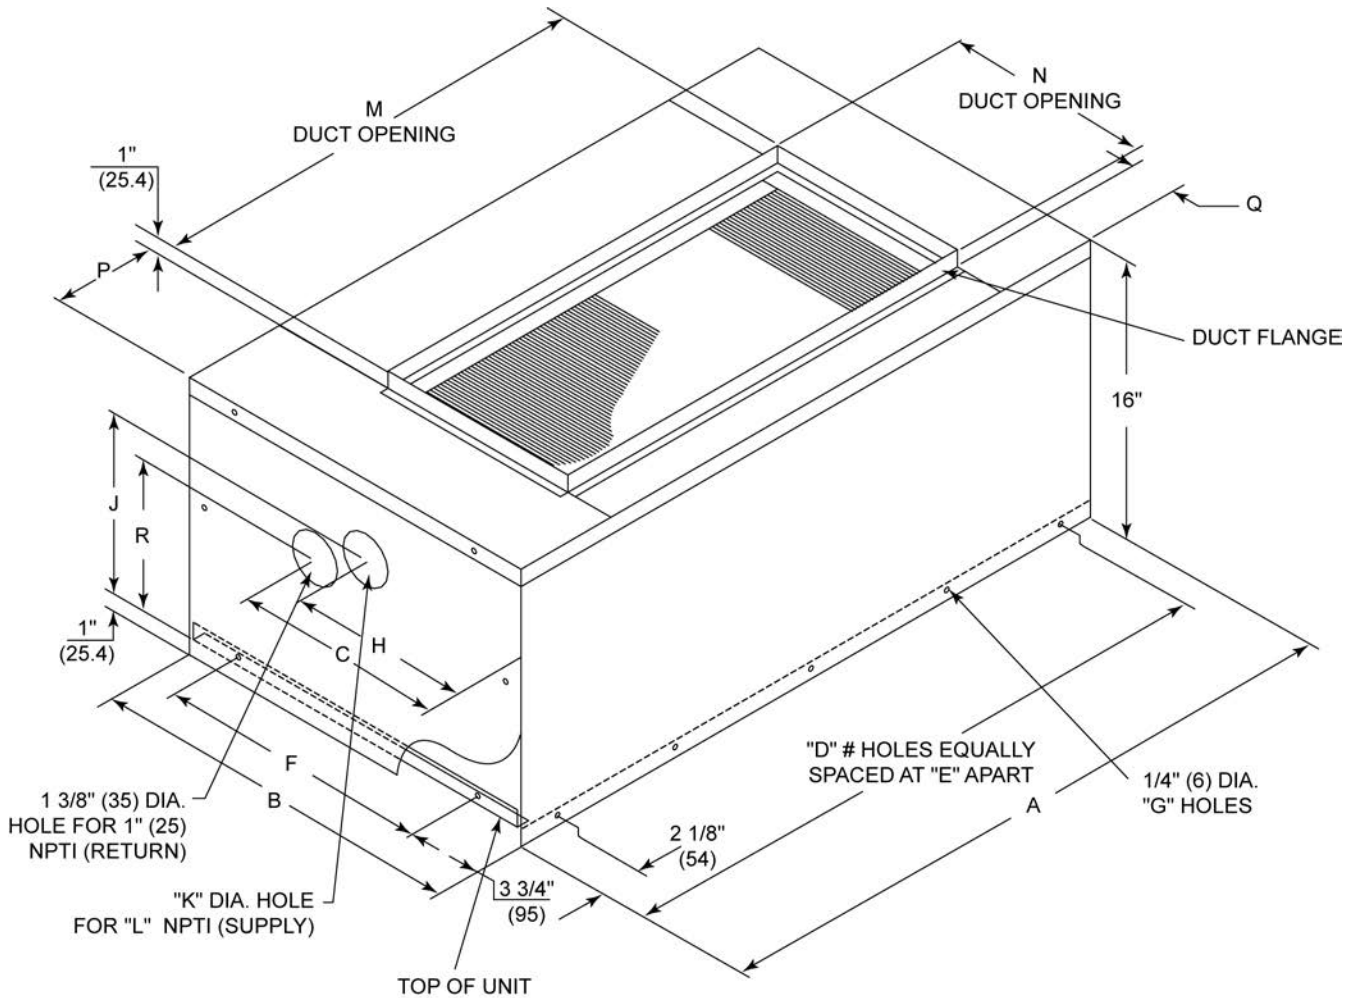


Table 84. Hot water coil accessory – inches (millimeters)

Model No.	A	B	C	D	E	F	G	H
BAYWATR027	38.14 (969)	22.74 (576)	13.74 (349)	5 (127)	9 (229)	13.65 (347)	16 (406)	26 (660)
BAYWATR028	47.74 (1213)	25.74 (654)	15.95 (405)	5 (127)	10.84 (275)	17.17 (436)	16 (406)	30 (762)
BAYWATR029	63.84 (1621)	25.74 (654)	15.95 (405)	6 (152)	11.84 (301)	17.16 (436)	18 (457)	36 (914)
BAYWATR030	79.74 (2025)	29.18 (741)	14.36 (365)	8 (203)	10.85 (276)	19.67 (500)	22 (559)	51 (1295)
BAYWATR031	92.74 (2356)	31.24 (793)	16.48 (419)	8 (203)	10.85 (276)	19.67 (500)	22 (559)	64 (1626)
Model No.	J	K	L	M	N	P	Q	
BAYWATR027	12 (305)	6 (152)	4.94 (125)	7.79 (198)	2.88 (73)	10.24 (260)	2 NPT (51) NPTI	
BAYWATR028	18 (457)	8.88 (225)	8.45 (215)	10.27 (261)	2.88 (73)	7.77 (197)	2.5 NPTI (64) NPTI	
BAYWATR029	18 (457)	13.88 (352)	8.45 (215)	10.03 (255)	2.88 (73)	7.58 (192)	2.5 NPTI (64) NPTI	
BAYWATR030	18 (457)	14.25 (362)	6.86 (174)	9.91 (252)	1.88 (48)	7.41 (188)	2.5 NPTI (64) NPTI	
BAYWATR031	18 (457)	14.25 (362)	8.98 (228)	9.88 (251)	3.75 (95)	7.38 (187)	2.5 NPTI (64) NPTI	

Note: Hot Water Coil Dimensions - inches (millimeters)

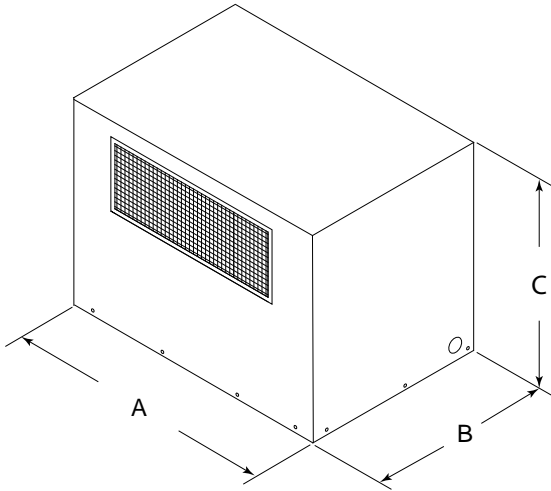


**Figure 26. Steam coil accessory – inches (millimeters)**

**Table 85. Steam coil accessory – inches (millimeters)**

Model No.	A	B	C	D	E	F	G	H	J	K
BAYWATR022	38.14 (969)	22.74 (577)	14.32 (364)	5 (127)	9 (229)	13.67 (347)	16 (406)	10.88 (276)	11.17 (284)	2 (51)
BAYWATR023	47.74 (1212)	25.74 (654)	20.14 (511)	5 (127)	10.84 (275)	17.17 (436)	16 (406)	10.88 (276)	11.17 (284)	2 (51)
BAYWATR024	63.84 (1621)	25.74 (654)	20.14 (511)	6 (152)	11.87 (301)	17.16 (436)	18 (457)	13.70 (348)	10.57 (268)	2.5 (64)
BAYWATR025	79.74 (2025)	29.18 (741)	18.55 (471)	8 (203)	10.85 (275)	19.67 (500)	22 (559)	12.11 (308)	10.05 (255)	2.5 (64)
BAYWATR026	92.74 (2355)	31.24 (793)	20.67 (525)	8 (203)	10.85 (275)	19.67 (500)	22 (559)	14.23 (361)	10.01 (254)	2.5 (64)
Model No.	L	M	N	P	Q	R				
BAYWATR022	1.5 (38)	26 (660)	12 (305)	6 (152)	2.87 (73)	9.95 (253)				
BAYWATR023	2 (51)	30 (762)	18 (457)	8.87 (225)	2.87 (73)	9.95 (253)				
BAYWATR024	2 (51)	36 (914)	18 (457)	13.87 (352)	2.87 (73)	9.13 (232)				
BAYWATR025	2 (51)	51 (1295)	18 (457)	14.12 (359)	1.87 (48)	8.61 (219)				
BAYWATR026	2 (51)	64 (1626)	18 (457)	14.12 (359)	3.75 (95)	8.58 (218)				

## Dimensional Data

**Figure 27. Discharge plenum and grille accessory**




**Table 86. Discharge plenum and grille dimensions – no heat – inches (millimeters)**

Unit	Model No. <sup>(a)</sup>	A	B	C
TWE051	BAYPLNM015	37.94 (963.6)	21.94 (557.2)	28 (711.2)
TWE072, TWE076	BAYPLNM016	47.5 (1206.5)	24.99 (634.7)	28 (711.2)
TWE101	BAYPLNM017	63.5 (1612.9)	24.99 (634.7)	28 (711.2)
TWE126, TWE156	BAYPLNM018 <sup>(b)</sup>	79.5 (2019.3)	27.63 (701.8)	22 (558.8)
TWE201	BAYPLNM019 <sup>(b)</sup>	92.5 (2349.5)	30.43 (772.9)	24 (609.6)

<sup>(a)</sup> When installed horizontally, plenum/water coil must be self-supported.

<sup>(b)</sup> For use with hydronic heat or no heat.

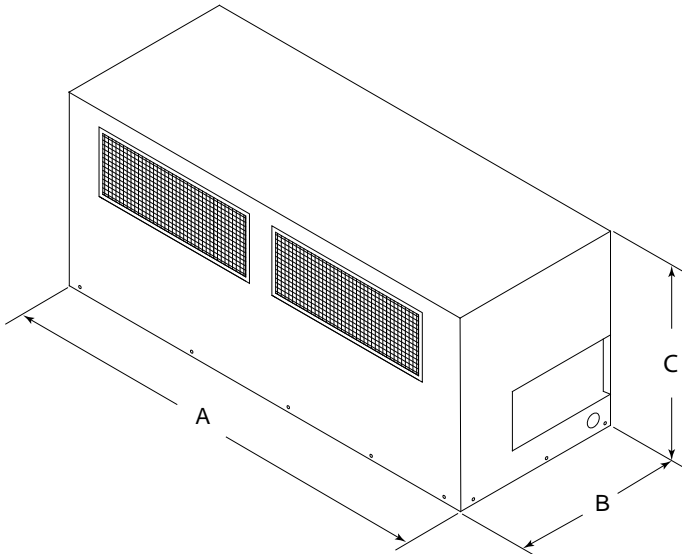**Figure 28. Discharge plenum and grille accessory**

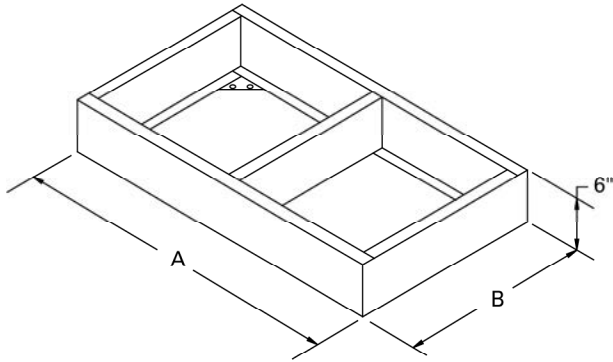


**Table 87. Discharge plenum and grille dimensions – inches (millimeters) – (for use with electric heat)**

Tons	Model No.	A	B	C
TWE051	BAYPLNM030	38.07 (967)	22.69 (576.3)	29.05 (738)
TWE072, TWE076	BAYPLNM031	47.86 (1216)	25.69 (652.5)	29.05 (738)
TWE101	BAYPLNM032	63.86 (1622)	25.69 (652.5)	29.05 (738)

**Table 87. Discharge plenum and grille dimensions – inches (millimeters) – (for use with electric heat) (continued)**

Tons	Model No.	A	B	C
TWE126, TWE156	BAYPLNM033	80.14 (2036)	29.10 (739.1)	35.11 (892)
TWE201	BAYPLNM034	92.96 (2361)	31.10 (789.9)	35.05 (890)

**Figure 29. Subbase accessory – inches (millimeters)**

**Table 88. Subbase dimensions – inches (millimeters)**

Tons	Model No.	A	B
TWE051	BAYBASE009	38 (965.2)	22.63 (574.8)
TWE072, TWE076	BAYBASE010	47.5 (1206.5)	25.51 (648.0)
TWE101	BAYBASE011	63.5 (1612.9)	25.52 (648.2)
TWE126, TWE156	BAYBASE012	79.5 (2019.3)	29.04 (737.6)
TWE201	BAYBASE013	92.5 (2349.5)	31.14 (791.0)

# Weights

## Heat Pump Condenser

Table 89. TWA unit and corner weights — kg (50 Hz)

Tons	Model No.	Shipping Max (kg)	Net Max (kg)	Corner Weights			
				1	2	3	4
5	TWA0604DA	163	148	50	38	25	34
	TWA0604DD	185	159	54	38	41	26
6.25	TWA0764DA	173	150	37	53	27	33
	TWA0764DD	209	183	63	44	47	30
8.33	TWA1014DA	224	211	74	49	53	34
	TWA1014DD	215	195	67	46	50	32
13	TWA1564DD	395	344	106	75	89	74
16.7	TWA2014DD	453	382	114	120	67	82

Figure 30. TWA060, 076, 101


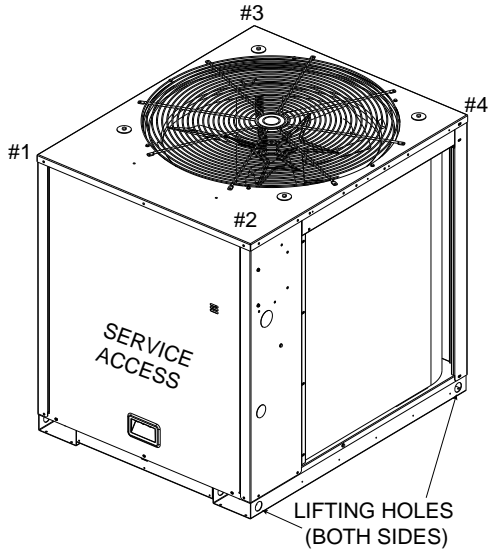


Figure 31. TWA156, 201

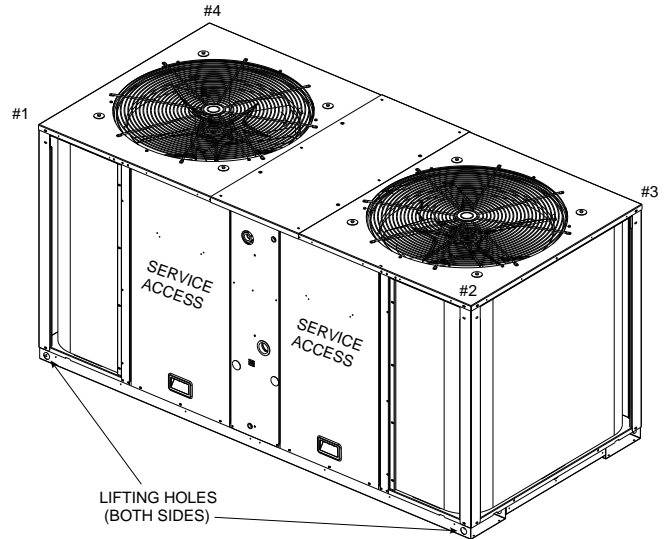


# Air Handler


**Table 90. Standard air handler (TWE) – unit and corner weights - (50 Hz)**

1	2	3	4	1	2	3	4				
4.6	TWE0514DA	285	232	55	71	51	55	54	67	50	61
6	TWE0724DB	385	323	67	99	75	82	56	92	87	88
6.25	TWE0764DA/B	385	323	67	99	75	82	56	92	87	88
8.33	TWE1014DA/B	441	393	77	121	110	85	79	118	77	119
10.4	TWE1264DB	753	676	168	192	181	135	196	164	145	171
13	TWE1564DB	752	675	167	192	181	135	196	163	145	171
16.7	TWE2014DB	912	818	258	168	161	231	256	181	146	235


**Figure 32. Vertical – TWE051, 072, 076, 101**

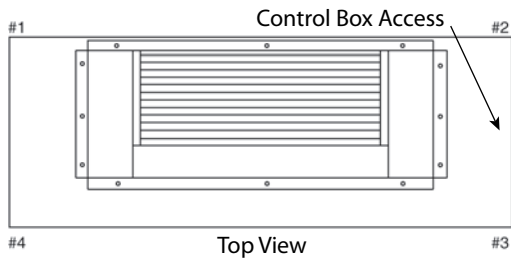

**Figure 33. Vertical – TWE126, 156, 201**

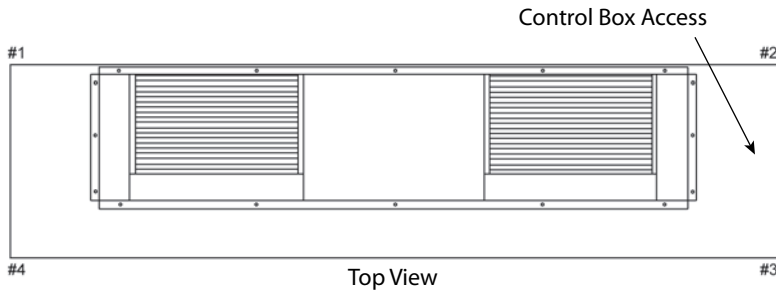


**Figure 34. Horizontal – TWE051, 072, 076, 101**

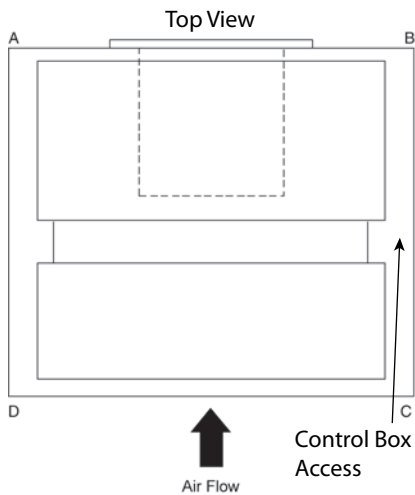

## Weights

---

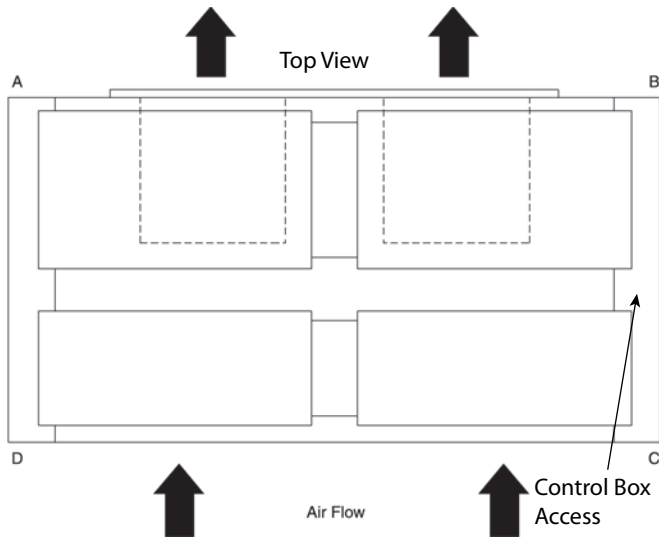Figure 35. Horizontal – TWE126, 156, 201



## Accessories

Table 91. Accessory weights (net lbs.)

Unit Used w/ Tons	Hot Water Coil	Steam Coil	Discharge Plenum and Grille with Hydronic Heat	Discharge Plenum and Grille without Heat	Discharge Plenum and Grille with Electric Heat	Return Air Grille	Electric Heat Min/Max	Subbase	Oversized Motor	RIS Isolator Floor Mount
5	86	94	63	58	115	3	32/43	14.4	31	2
6.25	116	131	78	73	160	5	27/45	19.4	48	2
8.33	165	148	97	92	195	7	27/45	23.5	50	2
10.4	211	234	—	230	235	10	79/100	28.4	80	2
13	211	234	—	230	235	10	79/100	28.4	80	2
16.7	242	261	—	145	265	12	79/100	31.7	88	2
Unit Used w/ Tons	RIS Isolator Suspended Mount	Steel Spring Isolator Floor Mount	Steel Spring Isolator Suspended Mount	Hail Guard	Control Transformer	Sensors	Modulating Low Ambient	On/Off Low Ambient	Service Valve	
5	9	12	6	21	—	—	—	—	5	
6.25	6	12	6	21	—	—	—	—	5	
8.33	7	12	6	28	—	—	—	—	5	
10.4	7	12	6	33	—	—	—	—	5	
13	7	12	6	55	—	—	—	—	5	
16.7	9	12	6	55	—	—	—	—	5	



# Mechanical Specifications

## Condensing Units

### Standard Options

#### General

- Weatherproofed steel mounting/lifting rails
- Hermetic scroll compressors
- Plate fin condenser coils
- Fans and motors
- Standard operating range 50-125°F (min. 0°F with low ambient accessory)
- Nitrogen holding charge
- 

#### Casing

- Zinc coated, heavy gauge, galvanized steel
- Weather resistant baked enamel finish
- Meets ASTM B117, 672 hour salt spray test
- Removable single side maintenance access panels
- Lifting handles in maintenance access panels
- Unit base provisions for forklift and/or crane lifting

#### Refrigeration System - Single Compressor (TWA060\*\*A, TWA076\*\*A, TWA101\*\*A)

- Single refrigeration circuit with integral subcooling circuit
- Single direct drive hermetic scroll compressor
- Suction gas-cooled motor w/  $\pm 10\%$  voltage utilization range of unit nameplate voltage
- Reversing valve
- Crankcase heater
- Internal temperature and current sensitive motor overloads
- No compressor suction and/or discharge valves (reduced vibration/sound)
- Factory installed liquid line filter drier
- Phase loss/reverse rotation monitor
- Liquid line service valve (with gauge port)
- Suction line service valve (with gauge port)
- External high pressure cutout device
- External low pressure cutout device
- Evaporator defrost control
- Loss of charge protection (discharge temperature limit)

#### Refrigeration System - Dual Compressor (TWA060\*\*D, TWA076\*\*D, TWA101\*\*D, TWA156\*\*D, TWA201\*\*D)

- Two (2) separate and independent refrigerant circuits
- Each refrigeration circuit equipped with integral subcooling circuit
- Two (2) direct drive hermetic scroll compressor
- Suction gas-cooled motors w/  $\pm 10\%$  voltage utilization range of unit nameplate voltage
- Reversing valves
- Crankcase Heaters
- Internal temperature and current sensitive motor overloads
- Factory installed liquid line filter driers
- Phase loss/reverse rotation monitor
- No compressor suction and/or discharge valves (reduced vibration/sound)
- External high pressure cutout devices
- External low pressure cutout devices



- Evaporator defrost control
- Loss of charge protection (discharge temperature limit)

**Condenser Coil (Fin and Tube)**

- 3/8" internally enhanced copper tube
- Mechanically bonded to lanced aluminum plate fins
- Factory pressure and leak tested to 660 psig
- Perforated steel hail guards available (factory installed option or field installed accessory)

**Condenser Fan**

- 26" or 28" propeller fan(s)
- Direct drive
- Statically and dynamically balanced

**Condenser Motor(s)**

- Permanently lubricated totally enclosed or open construction
- Built-in current and thermal overloads
- Ball or sleeve bearing type

**Controls**

- Centralized microprocessor
- Indoor and outdoor temperature sensors drive algorithms, making decisions for all heating, cooling, and ventilation
- Integrated anti-short cycle timer
- Integrated time delay between compressors
- Completely internally wired
- Numbered and colored wires
- Contactor pressure lugs or terminal block
- Unit external mounting location for disconnect device
- Single point power entry

**Factory Installed Options****Hail Guards**

- Condenser coil protection from hail, vandals, etc.
- Perforated, painted galvanized steel
- Factory or field installed

**Black Epoxy Coated Condenser Coil (Fin and Tube)**

- Thermoset vinyl coating
- Bonded to aluminum fin stock (prior to fin-stamping process)
- Economical protectant in mildly corrosive environments

**LonTalk Communication Interface**

- Factory or field installed
- Communications board
- Allows unit communication as a Tracer™ LCI-R device
- Allows unit communication with generic LonTalk® Network building automation controls

**Controls: Microprocessor**

- Centralized processor
- Indoor and outdoor temperature sensors drive algorithms, making decisions for all heating, cooling, and ventilation
- Integrated anti-short cycle timer
- Integrated time delay between compressors



## Mechanical Specifications

---

### Field Installed Options

#### Low Ambient (Fan ON/OFF)

- Provides unit cooling operation to outdoor ambient of 0°F
- Low cost solution
- Liquid line temperature controls condenser fan operation
- 1 kit per condenser fan required

#### Low Ambient (Modulating)

- Provides unit cooling operation to outdoor ambient of 0°F
- “Wave-chopper”
- Discharge line pressure controls condenser fan operation
- 1 kit per condenser fan required

#### Vibration Isolators

- Neoprene-in-shear or spring flex choice
- Reduce vibration transmission to building structures, equipment, and adjacent spaces
- Reduce noise transmission to building structures, equipment, and adjacent spaces

#### Zone Sensor

- Interfaces with microprocessor units
- Manual or automatic programmable
- System malfunction lights
- Remote sensor options
- Wireless option

#### Thermostat

- 1H/1C available
- 2H/1C available
- Manual or automatic changeover available
- Programmable and non-programmable solutions available

#### LonTalk Communication Interface

- Factory or field installed
- Communications board
- Allows unit communication as a Tracer™ LCI-R device
- Allows unit communication with generic LonTalk® Network building automation controls

#### BACnet Communication Interface

- Communicates directly with a generic open protocol BACnet MS/TP Network building automation system control

## Air Handlers

### Standard Options

#### General

- Completely factory assembled
- Convertible for horizontal or vertical configuration
- Convertible for cooling only or heat pump application
- Convertible for left or right external connections (refrigerant and/or electrical)
- Convertible for front or bottom air return
- Nitrogen holding charge

#### Casing

- Zinc coated, heavy gauge, galvanized steel
- Weather resistant baked enamel finish

- Access panels with captive screws
- Completely insulated with foil faced, cleanable, fire retardant, permanent, odorless glass fiber material
- Captured or sealed insulation edges
- Electrical connection bushings or plugs
- Refrigerant connection bushings or plugs
- Withstand elevated internal static pressure

**Refrigeration System**

- Single or dual circuit
- Distributor(s)
- Thermal expansion valves (TXVs)

**Evaporator Coil**

- 3/8" internally enhanced copper tube mechanically bonded to lanced aluminum plate fins
- Factory pressure and leak tested to 449 psig.
- Draw-through airflow
- Dual circuits are interlaced/intertwined
- Double sloped, removable, cleanable, composite drain pan
- Four drain pan positions

**Indoor Fan**

- Double inlet, double width, forward curved, centrifugal type fan
- Dual fans on 10.4 – 16.7 ton air handlers
- Adjustable belt drive
- Permanently lubricated bearings

**Indoor Motor**

- Adjustable motor sheaves (standard units)
- Thermal overload protection
- Permanently lubricated bearings
- Meet energy policy of 1992 (EPACT)
- Optional oversized motors for high static applications

**Controls**

- Completely internally wired
- Numbered and colored wires
- Magnetic indoor fan contactor
- Low voltage terminal strip
- Single point power entry
- Evaporator defrost control

**Filters**

- Access from side coil panels
- Filters slide on rack
- One inch (1"), throwaway filters on 4.6 - 8.33 ton units
- Filter rack convertible to two inch (2") capability on 4.6 - 8.33 ton units
- Two inch (2"), throwaway filters on 10.4 - 20.9 ton units

**Field Installed Options****Electric Heaters**

- Heavy duty nickel chromium elements
- Installs directly on fan discharge
- One or two stage control (dependent upon capacity)
- Single point power entry



## Mechanical Specifications

---

- Terminal strip connections
- 460V Heaters
  - Internally wye connected
  - Automatic line break high limit controls
- 230V Heaters
  - Internally delta connected
  - Automatic reset of high limit controls through pilot duty with secondary backup fuse links

### Hydronic Heat Coils

- One row steam
- Two row hot water
- Installs directly on fan discharge
- Heavy gauge sheet metal casing matches air handler
- Convertible for horizontal or vertical configurations

### Discharge Plenums and Grilles

- Vertical, free discharge applications
- Heavy gauge sheet metal casing matches air handler
- Satin-finished, 4-way adjustable louver grilles

### Return Air Grilles

- Vertical, free discharge applications
- Satin-finished, non-adjustable louver grilles
- Replaces front lower access panel

### Mounting Sub-Base

- Vertical floor mount configuration requirement
- Heavy gauge sheet metal casing matches air handler
- Provides additional clearance for condensate drain trapping
- Required when isolators are used

### Vibration Isolators

- Neoprene-in-shear or spring flex choice
- Floor or suspended applications
- Reduce vibration transmission to building structures, equipment, and adjacent spaces
- Reduce noise transmission to building structures, equipment, and adjacent spaces

### Oversize Motors

- High static applications
- Motor, sheaves, belt included





Notes

---





Ingersoll Rand (NYSE: IR) advances the quality of life by creating comfortable, sustainable and efficient environments. Our people and our family of brands – including Club Car®, Ingersoll Rand®, Thermo King® and Trane® – work together to enhance the quality and comfort of air in homes and buildings; transport and protect food and perishables; and increase industrial productivity and efficiency. We are a global business committed to a world of sustainable progress and enduring results.



[ingersollrand.com](http://ingersollrand.com)

Ingersoll Rand has a policy of continuous product and product data improvements and reserves the right to change design and specifications without notice.

We are committed to using environmentally conscious print practices.